


SMD Power Inductor CDRH80D38DMN



sumida

Under Development



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 8.3 × 8.3 × 4.0 mm Max.
- Product weight: 1.0g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging



Applications

- Ideally used in Notebook PC.

Dimension - [mm]

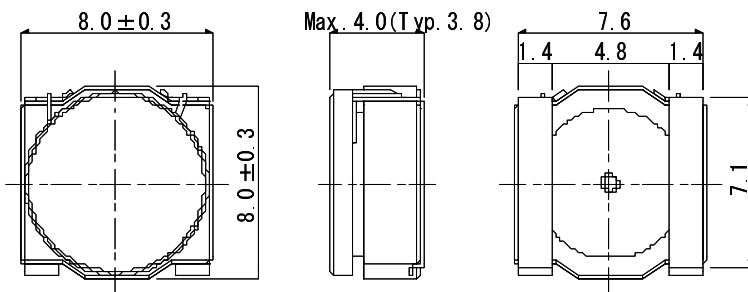

Land pattern and Schematics - [mm]

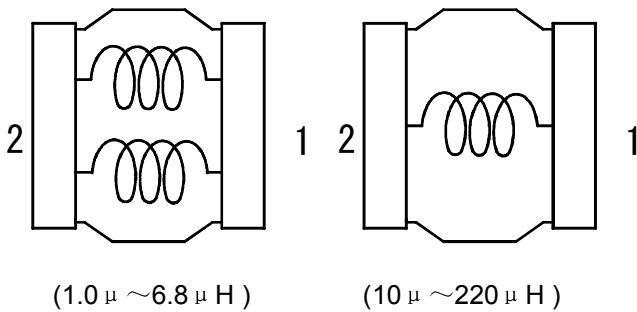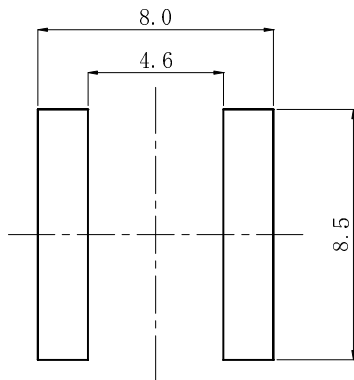

SMD Power Inductor CDRH80D38DMN



 **sumida**

Under Development

Electrical Characteristics

PART No.	STAMP	INDUCTANCE (μ H) [WITHIN] ※ 1	D.C.R.(m Ω) [WITHIN] (at 20°C)	Saturation Current (A) ※ 2		Temperature Rise Current (A) ※ 3 $\Delta T=40^\circ\text{C}$
				(at 20°C)	(at 105°C)	
CDRH80D38DMNNP-1R0PC	1R0	1.0 \pm 25%	7 \pm 25%	11.5	9.2	8.7
CDRH80D38DMNNP-1R5PC	1R5	1.5 \pm 25%	9 \pm 25%	9.6	7.6	7.8
CDRH80D38DMNNP-2R2PC	2R2	2.2 \pm 25%	10 \pm 25%	8.4	6.5	7.0
CDRH80D38DMNNP-3R3PC	3R3	3.3 \pm 25%	12 \pm 25%	6.9	5.4	6.1
CDRH80D38DMNNP-4R7PC	4R7	4.7 \pm 25%	15 \pm 25%	6.0	4.5	5.0
CDRH80D38DMNNP-6R8MC	6R8	6.8 \pm 20%	25 \pm 25%	4.8	3.6	4.0
CDRH80D38DMNNP-100MC	100	10 \pm 20%	33 \pm 25%	3.9	3.0	3.3
CDRH80D38DMNNP-150MC	150	15 \pm 20%	45 \pm 25%	3.2	2.5	2.6
CDRH80D38DMNNP-220MC	220	22 \pm 20%	83 \pm 25%	2.6	2.0	1.90
CDRH80D38DMNNP-330MC	330	33 \pm 20%	130 \pm 20%	2.1	1.60	1.50
CDRH80D38DMNNP-470MC	470	47 \pm 20%	155 \pm 20%	1.75	1.35	1.35
CDRH80D38DMNNP-680MC	680	68 \pm 20%	235 \pm 20%	1.45	1.15	1.07
CDRH80D38DMNNP-101MC	101	100 \pm 20%	305 \pm 20%	1.25	0.97	0.98
CDRH80D38DMNNP-151MC	151	150 \pm 20%	455 \pm 20%	1.04	0.79	0.80
CDRH80D38DMNNP-221MC	221	220 \pm 20%	715 \pm 20%	0.85	0.64	0.61

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.


※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t=40^\circ\text{C}$ ($T_a=20^\circ\text{C}$).

SMD Power Inductor CDRH80D38DMN



Under Development

Saturation Current & Temperature Rise Graph



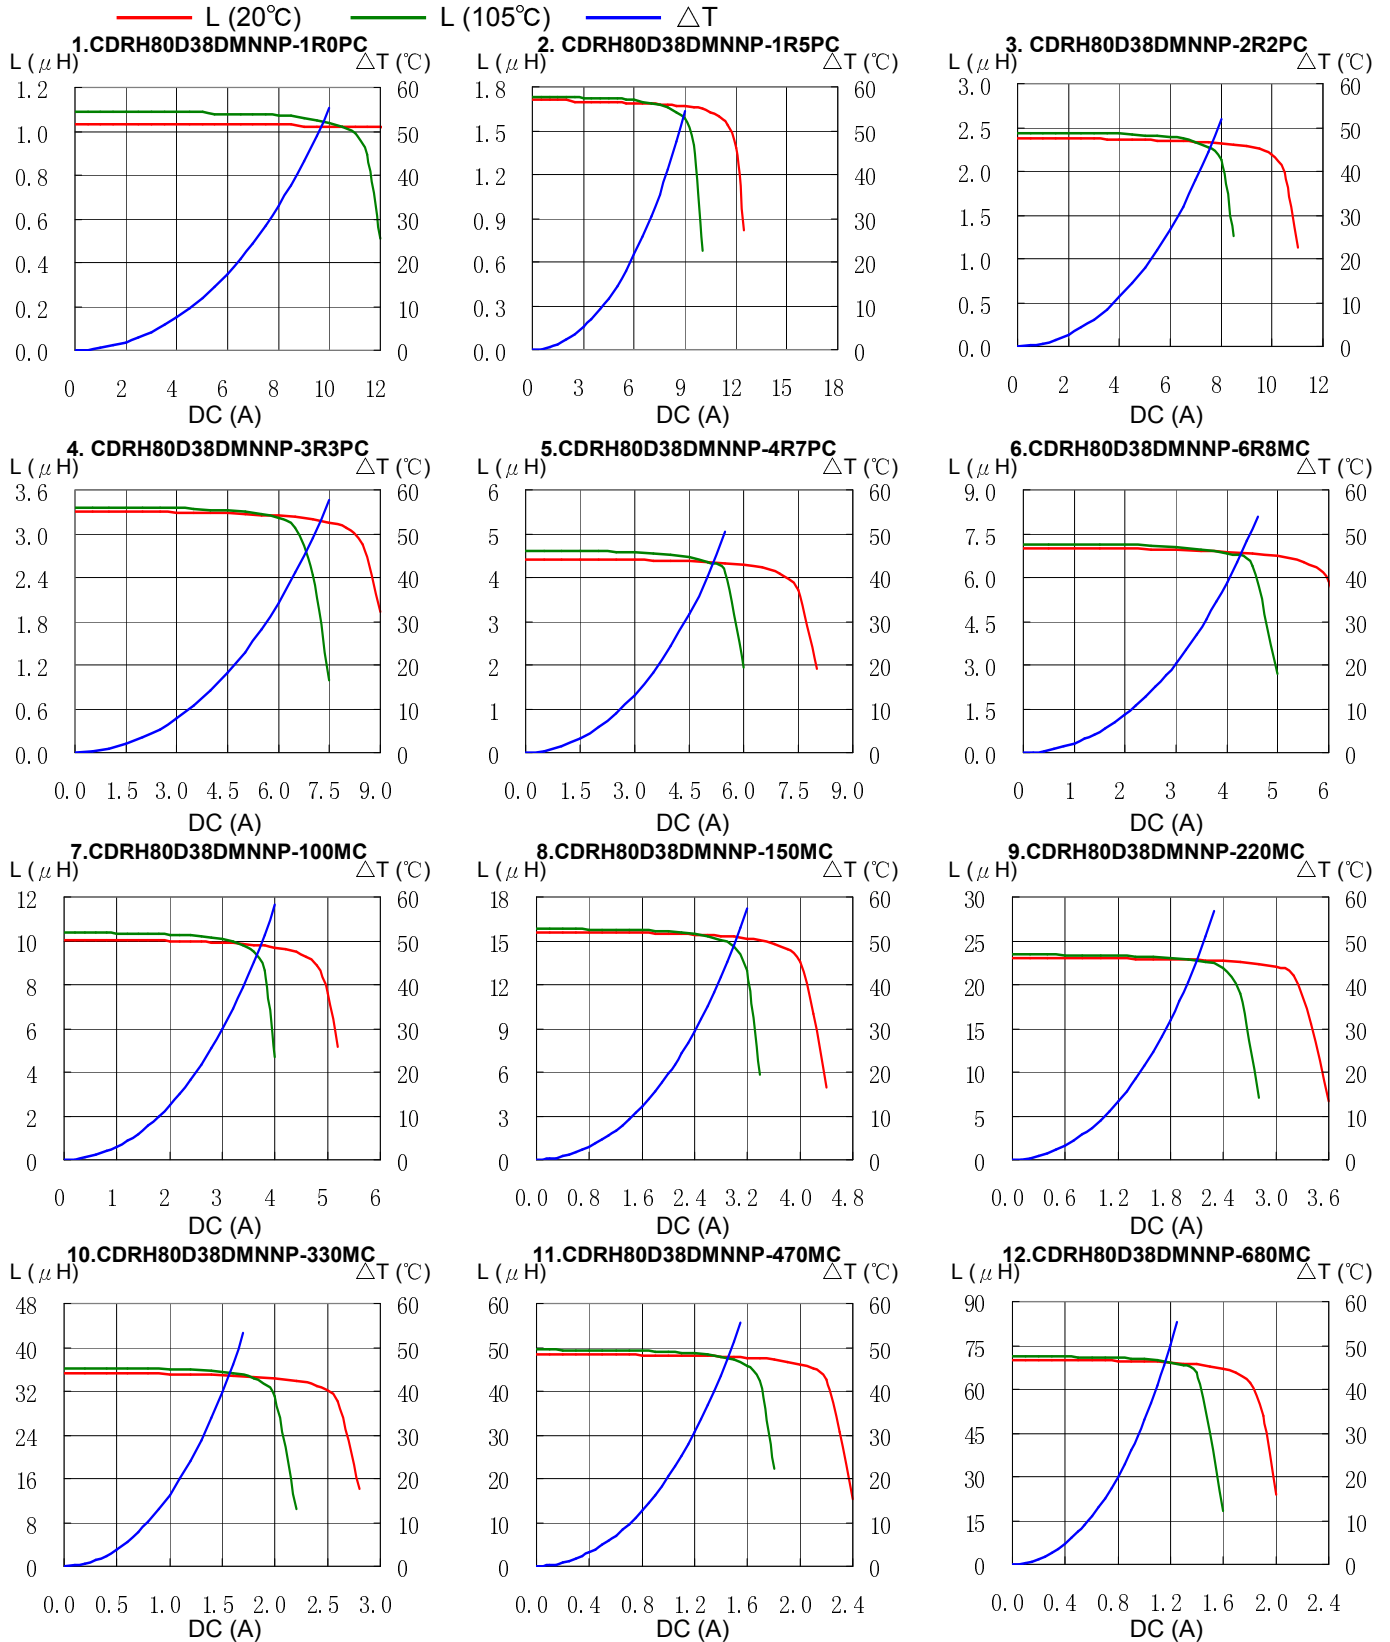


SMD Power Inductor CDRH80D38DMN





sumida

Under Development

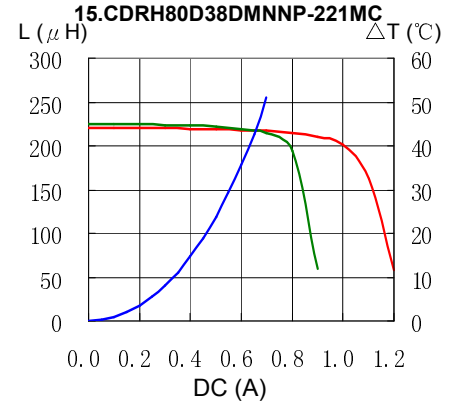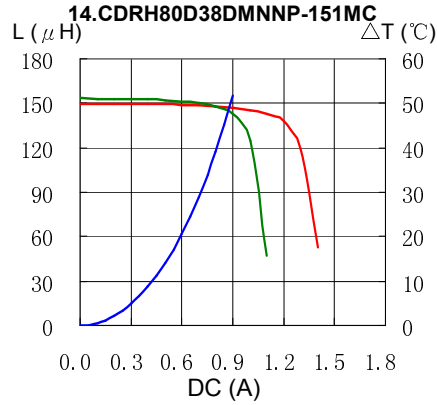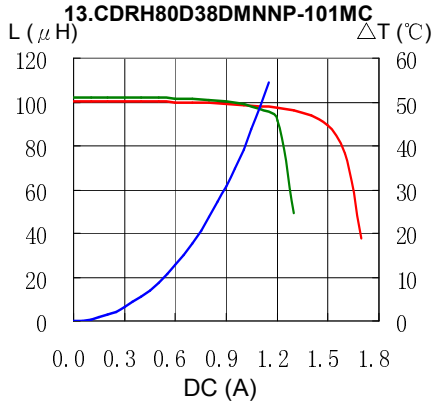

Solder Reflow Condition

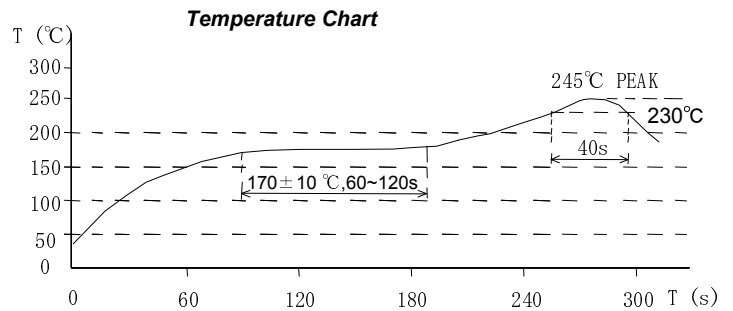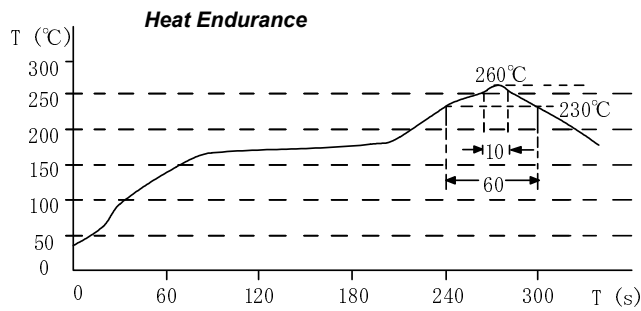

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong
Tel.+852-2880-6688
FAX.+852-2565-9600
sales@hk.sumida.com

Tokyo
Tel.+81-3-5202-7112
FAX.+81-3-5202-7105
sales@jp.sumida.com

Chicago
Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai
Tel.+86-021-5836-3299
FAX.+86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul
Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Oberzell
Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen
Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore
Tel.+65-6296-3388
FAX.+65-6296-3390
sales@sg.sumida.com

Neumarkt
Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei
Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose
Tel.+1-408-3219660
FAX.+1-408-321-9308
sales@us.sumida.com