

Surface Mount Common Mode Choke 8 COILS 16 DATE LINES


Electrical Specifications at 25° C

Part Number	Pri. Ind. OCL, Min. (μH)	DCR Max. (Ω)	Hi-Pot Min. V _{RMS}	Common Mode Attenuation (dB)						
				100k	1M	10M	30M	50M	100M	300M
F-135	47	0.3	2000	7	27	40	44	42	36	26


Operating Temperature Range: 0 °C to +70 °C

- Meets high performance EMI reduction required for Multiplexers, channel Routers and ISP servers.
- Flammability: Materials used in the production of these units are UL94-VO and meet requirements of IEC 695-2-2 needle flame test.

Schematic
Diagram

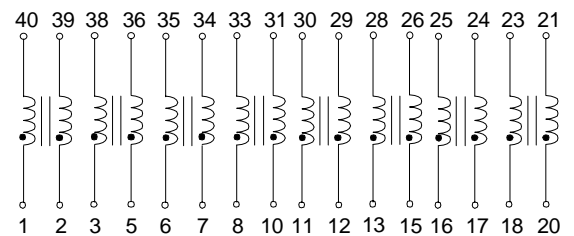

40-Pin 50 mil SMD Package Physical Dimensions in inches (mm)

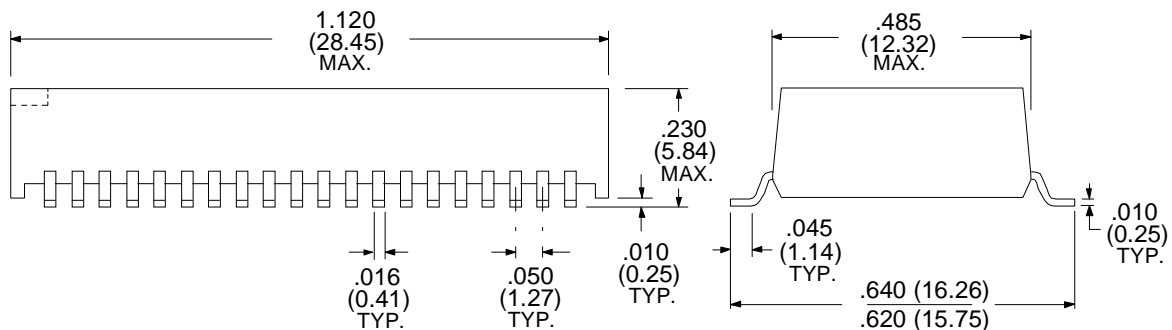

RHOMBUS P/N: F-135

CUST P/N:

NAME:

DATE: 5/18/99

SHEET: 1 OF 1