
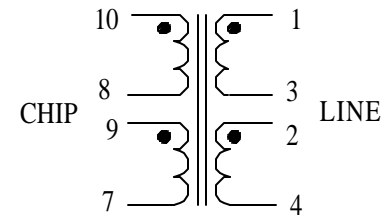


TITLE TRANSFORMER, ADSL CP	SCHOTT CORPORATION 1000 PARKERS LAKE ROAD WAYZATA, MN 55391	AGENCY APPROVAL: BAPT #650262 UL # E145198		PART NUMBER 36952	
		REV 3	PAGE 1 END		

SPECIFICATIONS

TEMP CLASS 105°C
 Designed to meet UL1950/IEC-950 Requirements
 Working Voltage 250 Vrms, Supplementary Insulation

- INDUCTANCE: @ 0.1 Vrms, 10 KHz,
 10-8-9-7 = 418 to 462 μH
- LEAKAGE INDUCTANCE: @ 0.1 Vrms, 100 KHz
 10-8-9-7 (short 1-3-2-4) = 15 μH MAX
- IWC: 1-3-2-4 TO 10-8-9-7 @ 100 KHz, 0.1Vrms = 50 pF MAX
- URNS RATIO: 10-8 : 9-7 : 1-3 : 2-4 = 1 : 1 : 1 : 1 ± 2%
- DC RESISTANCE: OHMS MAX
 1-3, 2-4 = 0.80
 10-8, 9-7 = 1.00
- LONGITUDINAL BALANCE: V1 = 0 dBm @ 100 KHz
 Rs = 100 OHMS, Rl = 100 OHMS, GROUND = 3&2
 LINE = 1-4, CHIP = 10-7, V2 = 55 dB MIN
- DIELECTRIC STRENGTH: 1500 Vac, 1 minute
 (2500 Vdc 1 second minimum automatic test
 2 second minimum manual test)
 1-2-3-4 TO 7-8-9-10
 ALL WINDINGS TO CORE
- HARMONIC DISTORTION:
 Rs = 100 OHMS, Rl = 100 OHMS, LINE = 1-4,
 CHIP = 10-7, V1 = 15 V p-p (5.32 Vrms) @ 40 kHz & 100 KHz
 V2 = -80 dB MAX

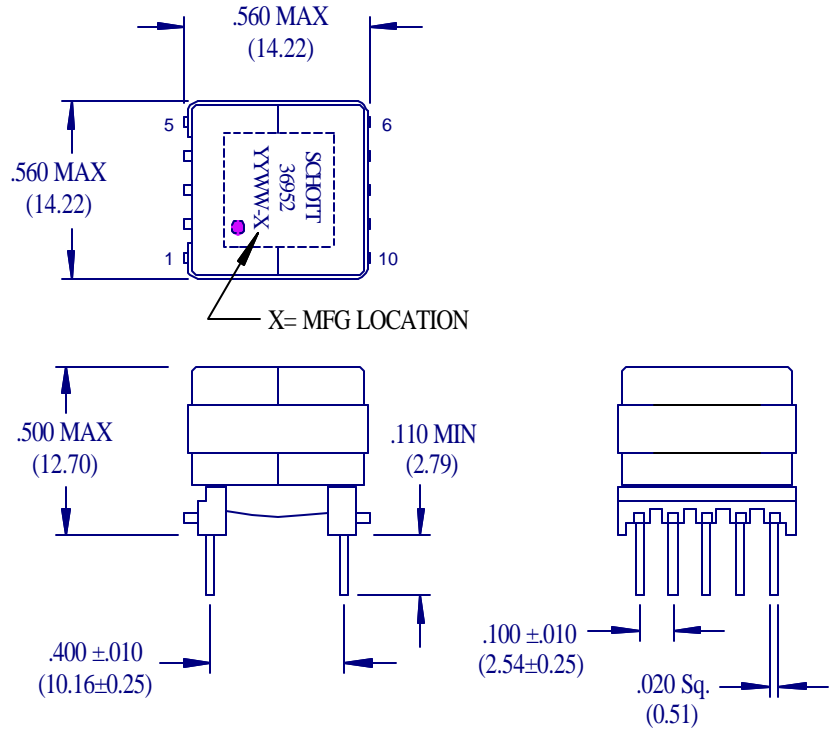

inches
(mm)

TOLERANCES	2 PLACE	3 PLACE	ANGLE
UNLESS OTHERWISE NOTED	+ .02	+ .010	+ °