

SHIELDED SMD POWER INDUCTOR



PSE104 SERIES



- High current inductor for Voltage Regulated Module (VRM)
- Good for DC/DC converter and switch-mode power supply applications
- High current in compact package
- Operating temperature range: -55°C to +120°C
- RoHS compliant product

ELECTRICAL SPECIFICATION @ 25°C

Part Number	Inductance (μ H) $\pm 20\%$	DCR (m Ω) Typ	DCR (m Ω) Max	I _{DC} (A) Typ	I _{SAT} (A) Typ
PSE104-					
R22M	0.22	1.1	1.5	32.0	50.0
R36M	0.36	1.5	1.7	31.5	50.0
R47M	0.47	1.5	1.9	27.5	49.0
R56M	0.56	1.9	2.3	27.5	49.0
R68M	0.68	2.0	2.5	23.0	40.0
R88M	0.88	2.7	3.0	20.0	38.0
1R0M	1.0	3.7	4.1	17.5	36.0
1R5M	1.5	5.3	6.0	15.0	27.5
1R8M	1.8	7.0	8.2	15.0	27.5
2R2M	2.2	8.2	9.0	12.0	25.6
3R3M	3.3	10.8	12	10.0	18.6
4R7M	4.7	15.0	16.5	9.5	17.0
5R6M	5.6	17.6	19.3	8.5	16.0
6R8M	6.8	19.5	25.0	8.0	14.0
8R2M	8.2	21.2	23.3	8.0	13.5
100M	10.0	33.2	36.5	6.8	12.0
150M	15.0	51.0	65.0	3.5	7.0
220M	22.0	90.0	120.0	2.0	3.0
330M	33.0	155.0	200.0	1.8	2.8

- Inductance measured at 100kHz / 0.1V_{RMS}
- I_{DC}: DC current (A) at which the ΔT of 40°C increase, typical
- I_{SAT}: DC current (A) for a ΔL drop 30% typical from initial value
- Inductance tolerance M=20%
- Ambient temperature: 125°C Max.

Dimensions

Unless otherwise specified, all tolerances are:
 inch: .XX : ± 0.015 .XXX : ± 0.004
 mm: X,X : $\pm 0,38$ X,XX : $\pm 0,10$

Product performance is limited to specified parameters. Data is subject to change without prior notice.

13200 Estrella Ave., Bldg. B
Gardena, CA 90248

Tel: 310-325-1043
Fax: 310-325-1044



www.mpsind.com
sales@mpsind.com

SHIELDED SMD POWER INDUCTOR




PSE104 SERIES

DIMENSIONS

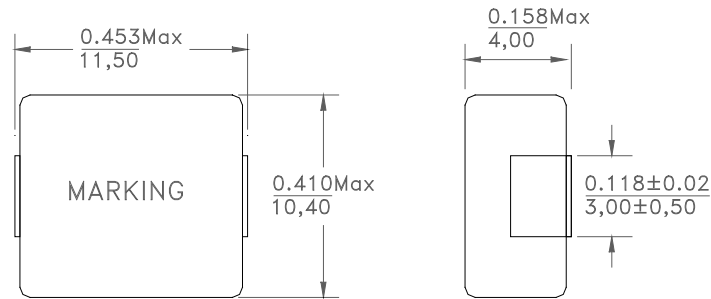

BOTTOM VIEW



PCB PATTERN

Product performance is limited to specified parameters. Data is subject to change without prior notice.

Dimensions
 Unless otherwise specified, all tolerances are:
 inch: .XX : ±0.015 .XXX : ±0.004
 mm: X,X : ±0,38 X,XX : ±0,10