




SOD-123

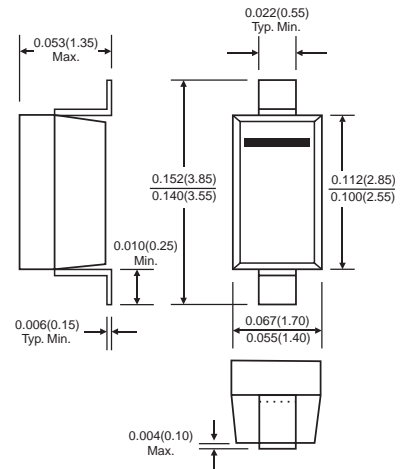

Features

- ◆ Low forward voltage drop
- ◆ Guard ring construction for transient protection
- ◆ Negligible reverse recovery time

Mechanical Data

- ◆ Case: SOD-123, plastic
- ◆ Polarity: Cathode band
- ◆ Marking: Date Code and Type Code or Date Code only
 - Type Code: SD101AW S1
 - SD101BW S2
 - SD101CW S3
- ◆ Weight: 0.01 grams (approx.)

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Maximum Ratings

Type Number	Symbol	SD101AW	SD101BW	SD101CW	Units
Peak Repetitive Reverse Voltage	VRRM	60	50	40	V
Working Peak Reverse Voltage	VRWM				V
DC Blocking Voltage	VR				V
RMS Reverse Voltage	VR(RMS)	42	35	28	V
Forward Continuous Current (Note 1)	IFM	15			mA
Non-repetitive Peak Forward Surge Current @ t ≤ 1.0s @ t = 10μs	IFSM	50 2.0			mA A
Power Dissipation (Note 1)	Pd	400			mW
Thermal Resistance Junction to Ambient Air (Note 1)	R _{θJA}	300			°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to + 125			°C

Electrical Characteristics

Type Number	Symbol	Min	Max	Units
Reverse Breakdown Voltage (Note 2) SD101AW IR=10μA SD101BW IR=10μA SD101CW IR=10μA	V(BR)	60 50 40	-	V
Peak Reverse Current SD101AW VR=50V SD101BW VR=40V SD101CW VR=30V	IR		200	nA
Forward Voltage Drop (Note 2) SD101AW IF=1.0mA SD101BW IF=1.0mA SD101CW IF=1.0mA SD101AW IF=15mA SD101BW IF=15mA SD101CW IF=15mA	V _F	-	0.41 0.40 0.39 1.00 0.95 090	V
Junction Capacitance VR=0, f=1.0MHz SD101AW SD101BW SD101CW	C _j	-	2.0 2.1 2.2	pF
Reverse Recovery Time IF=IR=5.0Ma Irr=0.1 x IR, RL=100Ω	trr	-	1.0	nS

Notes: 1. Valid Provided that Terminals are Kept at Ambient Temperature.

2. Pulse Test: Pulse width = 300μs, Duty cycle ≤ 2%..

RATINGS AND CHARACTERISTIC CURVES (SD101AW - SD101CW)

FIG.1- TYPICAL FORWARD CHARACTERISTIC VARIATIONS FOR PRIMARY CONDUCTION

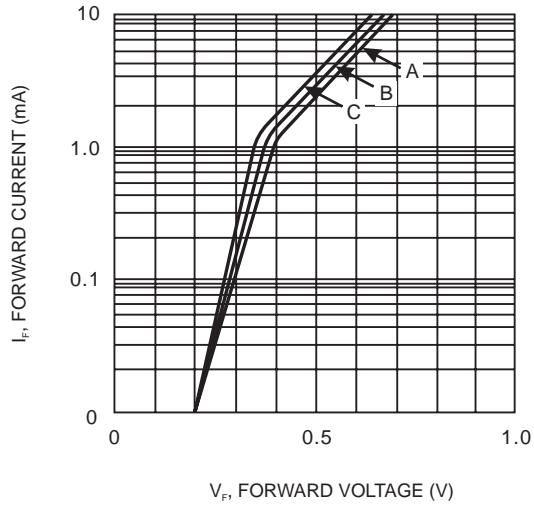


FIG.2- TYP. JUNCTION CAPACITANCE VS REVERSE VOLTAGE

