
### **Description**

TS16GJFV85 is a 16GB USB Flash Drive with 1pcs of 16Gbx8 Flash Memory assembled on printed circuit board.

#### **Outline**

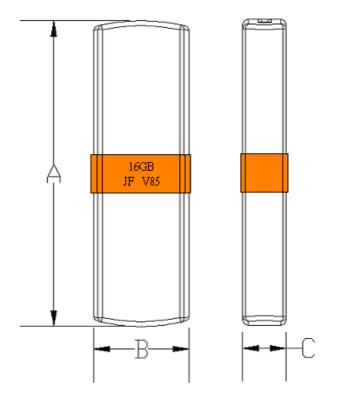

#### **Features**

- Frame Color: Orange
- Fully compatible with hi-speed USB 2.0
- Easy Plug and Play installation
- USB powered. No external power or battery needed
- LED indicates the usage status
- JetFlash elite software pack\*

## **System Requirement**

- Hardware: Desktop or notebook computer with USB port
- Operating System: Windows<sup>®</sup> 7/ Vista/ XP/ Me/ 2000 and Mac<sup>™</sup> OS 9.0 or later, Linux<sup>™</sup> Kernel 2.4.2 or later

### **Dimensions**

Side	Millimeters	Inches
Α	49.5 ± 1.00	1.95 ± 0.04
В	15.8 ± 1.00	0.62 ± 0.04
С	7.4 ± 1.00	0.29 ± 0.04

\*JetFlash software pack

Fund	ction		
Favo	rites	store your favorite website addresses on the JetFlash	
Autol	_ogin	automatically login to websites	
Secre	et-Zip	compress and/or password protect saved files	
PC-I	_ock	makes JetFlash a key to your computer	
E-N	/lail	securely send, receive and save e-mails	
DataB	ackup	backup, restore and synchronize your data	

### **Pinouts**

Pin No.	Pin Name	Function		
01	VCC	USB power input		
02	USB-	LICD differential signs of		
03	USB+	USB differential signal		
04	VSS	Ground		

# **Specifications**

Storage Capacity	16GB**	
Data Retention	10 years	
Erase Cycles	>10,000 times	
Connector Durability	10,000 times	
System Performance	Read: 18MB/sec (max.), Write: 9MB/sec (max.)	
Wear-leveling	Dynamic	
Power Supply	DC 5V±10%, Max current : 200 mA	
Temperature Range	Operation: 0-70°C, Non-Operating: -20°C-75°C	
Certificates	CE, FCC, BSMI	

Above technical information is based on industry standard data and tested to be reliable. However, Transcend makes no warranty, either expressed or implied, as to its accuracy and assumes no liability in connection with the use of this product. Transcend reserves the right to make changes in specifications at any time without prior notice.

<sup>\* 1</sup>GB = 1 billion bytes. A certain portion of the storage capacity may be reserved for firmware and maintenance use.