


## Standard Recovery Diodes, 160 A (INT-A-PAK Power Modules)




### FEATURES

- High voltage
- Electrically isolated by DBC ceramic ( $Al_2O_3$ )
- 3000  $V_{RMS}$  isolating voltage
- Industrial standard package
- High surge capability
- Glass passivated chips
- Modules uses high voltage power diodes in four basic configurations
- Simple mounting
- UL approved file E320098
- Compliant to RoHS
- Designed and qualified for multiple level

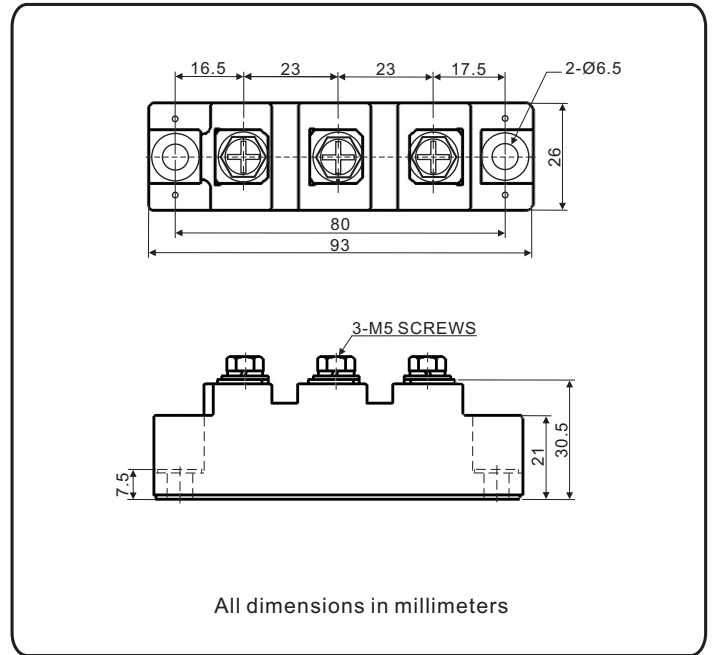

### APPLICATIONS

- DC motor control and drives
- Battery charges
- Welders
- Power converters

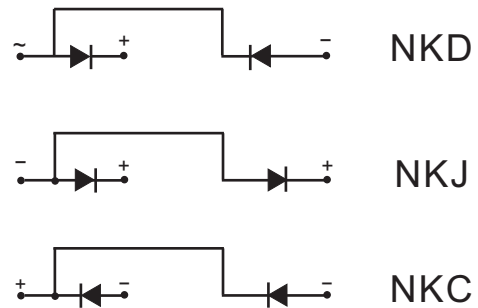

### PRODUCT SUMMARY

$I_{F(AV)}$	160 A
Type	Modules - Diode, High Voltage

### MAJOR RATINGS AND CHARACTERISTICS

SYMBOL	CHARACTERISTICS	VALUE	UNITS
$I_{F(AV)}$		160	A
	$T_C$	100	$^{\circ}C$
$I_{F(RMS)}$		251	A
$I_{FSM}$	50 Hz	6000	
	60 Hz	6300	
$I^2t$	50 Hz	180	$kA^2s$
	60 Hz	163	
$I^2\sqrt{t}$		1800	$kA^2\sqrt{s}$
$V_{RRM}$		400 to 1600	V
$T_J$	Range	-40 to 150	$^{\circ}C$

### ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	V <sub>RRM</sub> , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V <sub>RSM</sub> , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I <sub>RRM</sub> AT 150 °C mA
NKD160..S	04	400	500	8
	08	800	900	
NKJ160..S	12	1200	1300	
NKC160..S	14	1400	1500	
	16	1600	1700	

FORWARD CONDUCTION					
PARAMETER	SYMBOL	TEST CONDITIONS	VALUE	UNITS	
Maximum average on-state current at case temperature	I <sub>F(AV)</sub>	180° conduction, half sine wave	160	A	
			100	°C	
Maximum RMS on-state current	I <sub>F(RMS)</sub>	180° conduction, half sine wave ,50Hz ,T <sub>C</sub> = 100°C	251	A	
Maximum peak, one-cycle, on-state non-repetitive surge current	I <sub>FSM</sub>	No voltage reapplied	t = 10 ms	6000	
			t = 8.3 ms	6300	
Maximum I <sup>2</sup> t for fusing	I <sup>2</sup> t	100%V <sub>RRM</sub> reapplied	Sine half wave, initial T <sub>J</sub> = T <sub>J</sub> maximum	t = 10 ms	180
				t = 8.3 ms	163
				t = 10 ms	126
				t = 8.3 ms	114
Maximum I <sup>2</sup> √t for fusing	I <sup>2</sup> √t	t = 0.1 ms to 10 ms, no voltage reapplied	1800	kA <sup>2</sup> √s	
Maximum forward voltage drop	V <sub>FM</sub>	I <sub>FM</sub> = 300A , T <sub>J</sub> = 25 °C, 180° conduction	1.4	V	

BLOCKING				
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum peak reverse and off-state leakage current	I <sub>RRM</sub>	T <sub>J</sub> = 150 °C	8	mA
RMS isolation Voltage	V <sub>ISO</sub>	50 Hz, circuit to base ,all terminals shorted ,t = 1s	3000	V
		t = 60s	2500	

THERMAL AND MECHANICAL SPECIFICATIONS				
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum junction operating temperature range	T <sub>Stg</sub> , T <sub>J</sub>		- 40 to 150	°C
Maximum thermal resistance, junction to case per junction	R <sub>thJC</sub>	DC operation	0.21	°C/W
Maximum thermal resistance, case to heatsink per module	R <sub>thCS</sub>	Mounting surface, smooth , flat and greased	0.054	
Mounting torque ± 10 %	IAP to heatsink, M6 busbar to IAP, M5	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.	4 to 6	N.m
Approximate weight			140	g
			4.9	oz.
Case style			New INT-A-PAK	

Fig1. Power dissipation

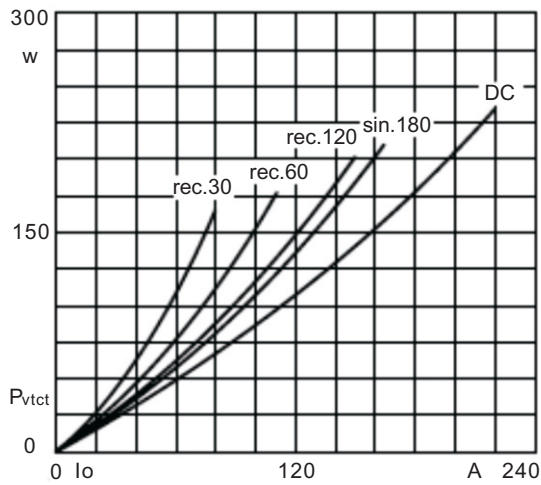


Fig2. Forward Current Derating Curve

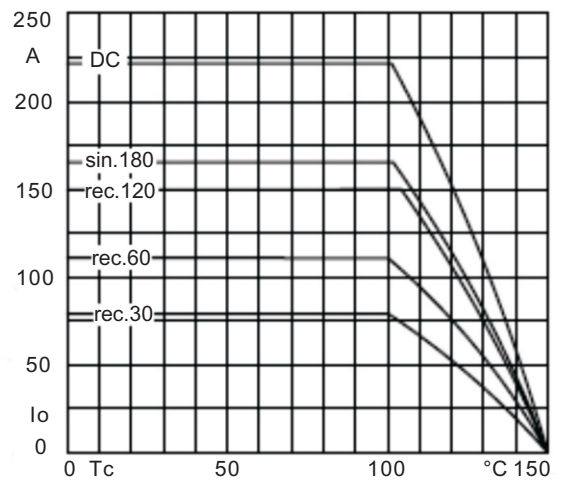


Fig3. Transient thermal impedance

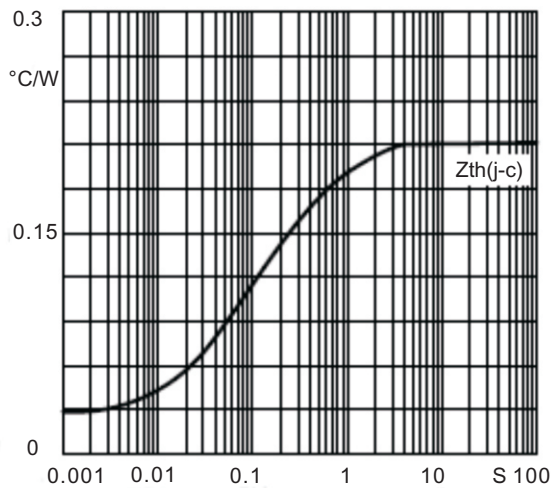


Fig4. Max Non-Repetitive Forward Surge Current

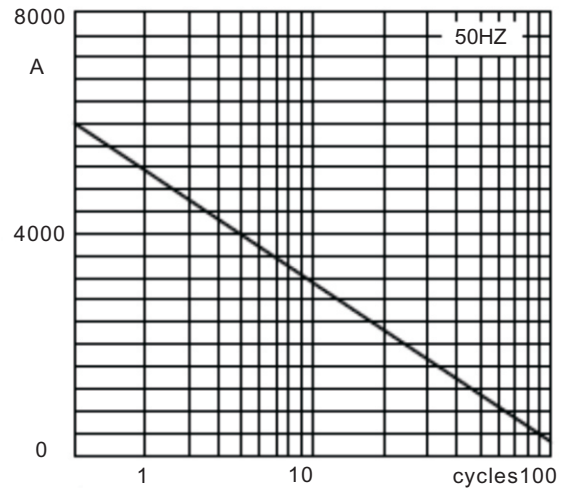


Fig5. Forward Characteristics

