
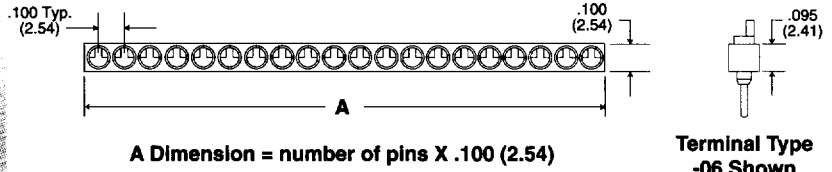


Single In-line Solid Adapter Strips

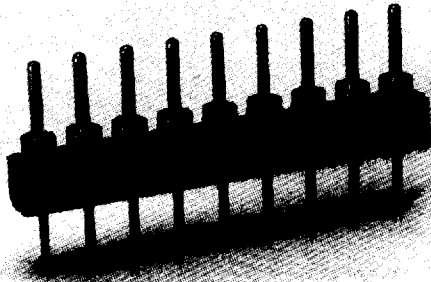

Features:

- Molded in lengths 3 - 20, 30 & 32. For other lengths consult factory.
- .100" (2.54mm) pin to pin spacing.
- Board to board applications.
- Highly reliable method of interconnecting.

Terminals and Contacts:

Terminal: Brass - Copper Alloy 360, ASTM-B-16

Plating:

Terminal: Gold over Nickel or Tin-Lead over Nickel


Body Material:

NA - Glass Filled Thermoplastic Polyester (P.B.T.) U.L. Rated 94V-O, -60°C to 140°C (-76°F to 284°F)


HNA - High Temp. Glass Filled Thermoplastic, U.L. Rated 94V-O, -60°C to 260°C (-76°F to 500°F)

Terminal Information

<p>Type -06</p>	<p>Type -07</p>	<p>Type -08</p>
<p>Type -09</p>	<p>Type -68</p>	<p>Type -43</p>
<p>Type -399</p>	<p>Type -185</p>	<p>Type -42</p>
<p>Type -398</p>	<p>Type -403</p>	<p>Type -71</p>



How To Order

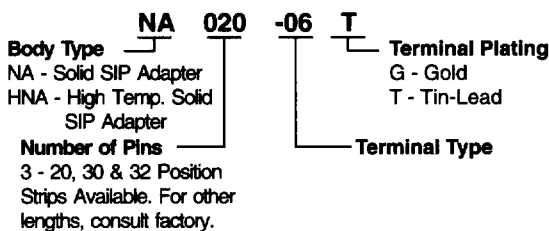

Quick turn delivery available on standard terminal types.

Additional terminal types available. See terminal section for detailed terminal information.