


COMPONENTS	IMPEDANCE
3/4"-20 THREADED TWINAX MALE	N/A
3/4"-20 THREADED TWINAX MALE	N/A
PE-S330	100 OHM

Standard Lengths	
-18	18"
-36	36"
-60	60"
-90	90"
-120	120"
-180	180"
-XXX	Custom Length in Inches

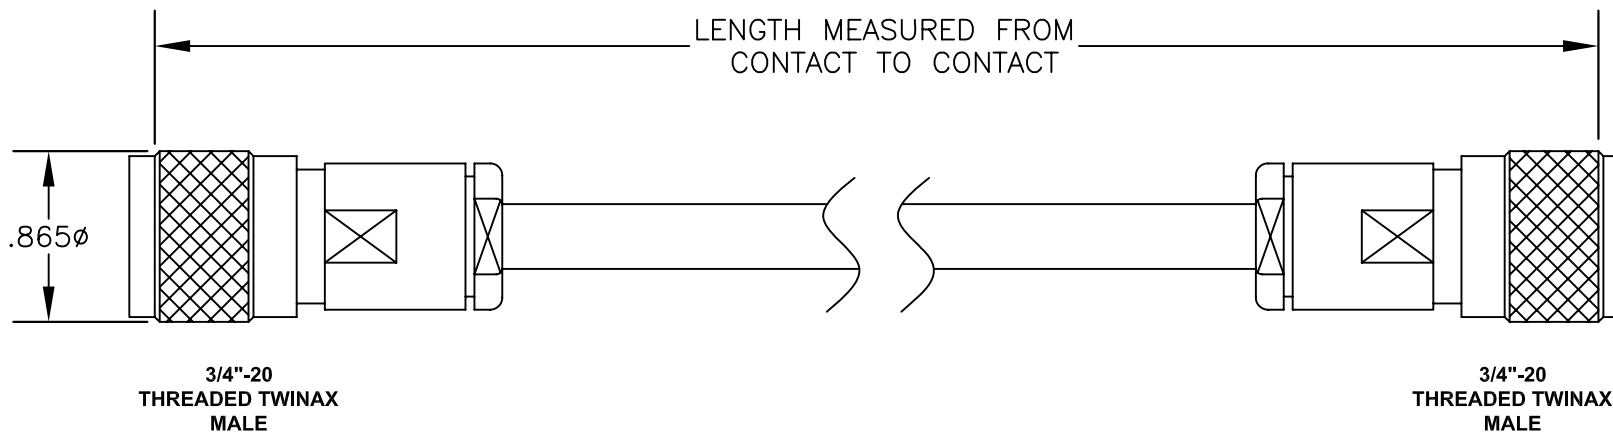

PASTERNAK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE
PE3930-XX

DES. 3/4"-20 THREADED TWINAX MALE TO, 3/4"-20 THREADED TWINAX MALE, 100 OHM, PE-S330 TWINAXIAL CABLE

REV. A	FSCM NO. 53919	CAD FILE 050609	SCALE N/A	SIZE A	127
--------	----------------	-----------------	-----------	--------	-----

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES.
 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.