
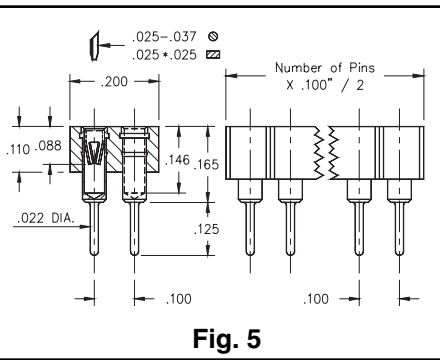
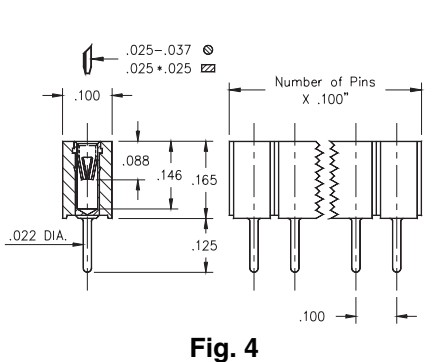
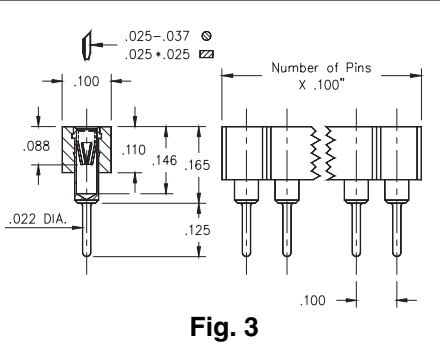


- Receptacles accept .030" diameter and .025" square pins.
- Pin headers use MM# 5016 pins. (See page 173 for details)
- Low profile sockets use MM# 1303 pins. (See page 148 for details)

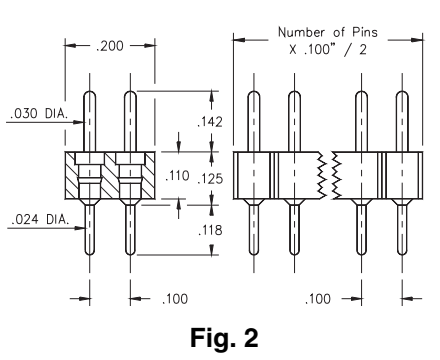

Ordering Information

Fig. 1	Single Row	Low Profile Pin Header
	800-XX-0__-10-002	
	Specify # of pins	└───> 01-64
Fig. 2	Double Row	Low Profile Pin Header
	802-XX-0__-10-002	
	Specify # of pins	└───> 02-64

XX= Plating Code See Below

SPECIFY PLATING CODE XX=	10	90		
Pin Plating	10μ" Au	200μ" Sn/Pb		

Fig. 3	Single Row	Low Profile Socket (short insulator)
	801-XX-0__-10-002	
	Specify # of pins	└───> 01-64
Fig. 4	Single Row	Low Profile Socket (long insulator)
	801-XX-0__-10-012	
	Specify # of pins	└───> 01-36
Fig. 5	Double Row	Low Profile Socket
	803-XX-0__-10-002	
	Specify # of pins	└───> 02-72

XX= Plating Code See Below

SPECIFY PLATING CODE XX=		93	99
Sleeve (Pin)		200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)		30μ" Au	200μ" Sn/Pb