
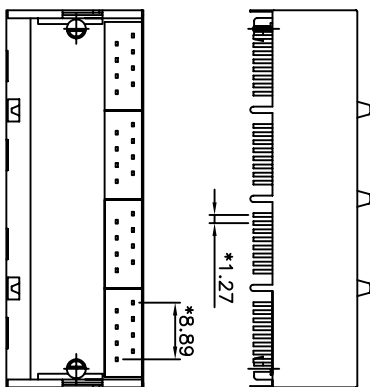
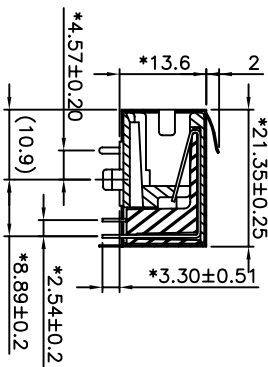


REVISION RECORD			
REV	ECO	ADDRESS/APP'D	DATE
			2/26/04
		CHKD	

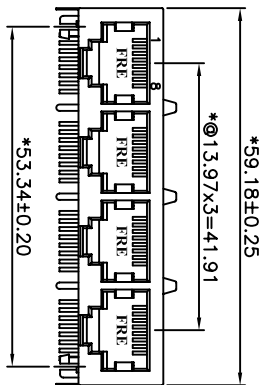

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 50MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT+GF 30% UL94V-0 COLOR BLACK
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB. MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION : -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE:230~250°C(3~5 SECONDS)
4. RoHS COMPLIANT.


MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

UL & CUL FILE NO. E163191

PART NUMBER: E590X-25C34X-1

- NO. OF CONTACT : 2- 6u" 3-15u"
- 8- 8 CONTACTS : 4-30u" 5-50u"
- 1-10 CONTACTS

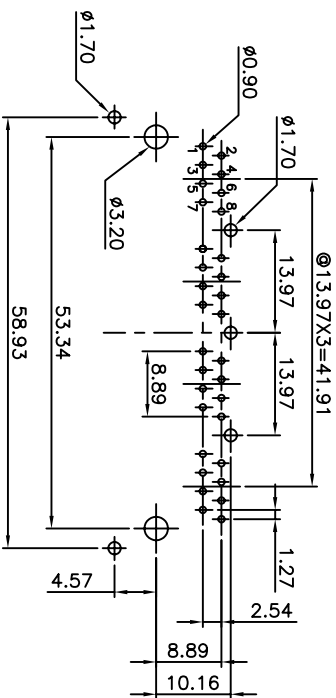

PC Board Thickness=1.60mm

PC Board Layout Component Side Shown

DETACHED LISTS		DATE 07/05/06		TITLE	
MIN	(INCH)	DATE	DATE	20.57 PCB JACK 4 PORTS	
TOLERANCES EXCEPT AS NOTED		CHKD	DATE	DRAWING NO. GE593122-LC	
.0 ± 0.2		MFD	DATE	/PART NO. SEE NOTE	
.00 ± 0.15		APPL	DATE	SIZE REV	
.000 ± 0.075				A3 0	
ANGLES ± 0.5		MATERIAL :		DO NOT SCALE DRAWING	
		QTY :		SHEET X OF Y	
		FINISH :			
		SCALE : 1:25:1			
		THIRD ANGLE PROJECTION			

Pulse RoHS Compliant

PULSE ELECTRONIC CO., LTD