




Methode's role as an innovator of interconnect products worldwide for over 50 years continues with RF Products designed to meet the most stringent industry requirements.

MCX Series

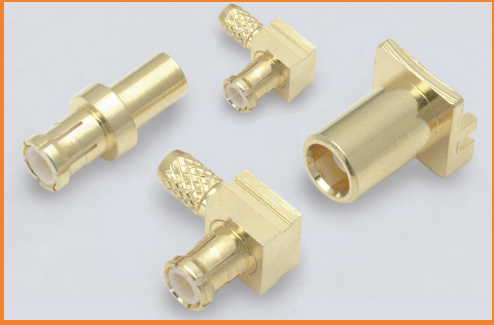


Applications:

Process Controls, PC/LAN, Wireless, Telecommunications, Instrumentation

*Electrical Specifications:

Voltage Rating:	AC 250V
Withstanding Voltage:	AC 500V one minute
Insulation Resistance:	1000 M Ω min at DC 500V
Contact Resistance:	5 m Ω max at DC 1A
Frequency Range:	0-6 GHz
Impedance:	50 Ohm
VSWR:	1.35 max

MMCX Series

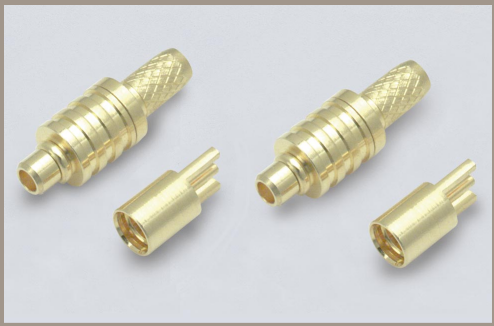

Applications:

Wireless, Instrumentation, Antennas, Radio Boards, PCMCIA Cards, RF Test Ports, Base Stations, Global Positioning Systems, Cellular Telephones

*Electrical Specifications:

Voltage Rating:	AC 125V
Withstanding Voltage:	AC 500V one minute
Insulation Resistance:	500 M Ω min at DC 500V
Contact Resistance:	5 m Ω max at DC 0.1A
Frequency Range:	0-6 GHz
Impedance:	50 Ohm
VSWR:	1.25 max

F Series



Applications:

NTSC TV Antennas, CATV, CIMS, HFC (Hybrid Fiber Coax) Networks

*Electrical Specifications:

Voltage Rating:	AC 150V
Withstanding Voltage:	AC 500V one minute
Insulation Resistance:	500 M Ω min at DC 500V
Contact Resistance:	5 m Ω max at DC 1A
Impedance:	75 Ohm
VSWR:	1.2 max

**These characteristics are typical and may not apply to all connectors*