

ROHS

Micro Commercial Components

Micro Commerci al Omponents 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 Fax: (818) 701-4939

SF51 THRU SF58

Features Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates

- RoHS Compliant. See ordering information)
- Low forward voltage, high current capability and Low leakage
- Superfast recovery times-epitaxial construction
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Maximum Ratings

- Operating Junction Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 25 °C/W Junction To Ambient

MCC Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
SF51	50V	35V	50V
SF52	100V	70V	100V
SF53	150V	105V	150V
SF54	200V	140V	200V
SF55	300V	210V	300V
SF56	400V	280V	400V
SF58	600V	420V	600V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	I _{F(AV)}	5.0A	T _A = 55°C
Peak Forward Surge Current	I _{FSM}	150A	8.3ms, half sine
Maximum Instantaneous Forward Voltage SF51-SF54 SF55-SF56 SF58	V _F	0.95V 1.25V 1.70V	I _{FM} = 5.0A; T _A = 25°C
Maximum DC Reverse Current At Rated DC Blocking Voltage	I _R	5.0uA 150uA	T _A = 25°C T _A = 125°C
Typical Junction Capacitance	С	45pF	Measured at 1.0MHz, V _R =4.0V
Maximum Reverse Recovery Time	T_{RR}	35nS	I _F =0.5A, I _R =1.0A, I _{RR} =0.25A


Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

DO-201AD

5.0 Amp Super Fast

Rectifier


50 to 600 Volts



DIMENSIONS					
	INCHES		MM		
DIM	MIN	MAX	MIN	MAX	NOTE
Α	.287	.374	7.30	9.50	
В	.189	.208	4.80	5.30	
С	.048	.052	1.20	1.30	
D	1.000		25.40		

SF51 thru SF58



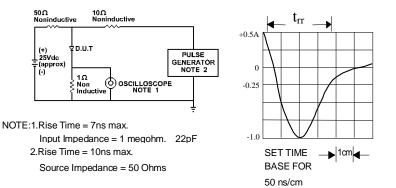

ARBIENT TEMPERATURE

8.0

4.0

50

75

100

125

150


175

200

AMBIENT TEMPERATURE

Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

Fig. 2-MAXIMUM AVERAGE FORWARD CURRENT RATING







Fig. 3-MAXIMUM AVERAGE FORWARD CCURRENT

Fig. 4-FORWARD CURRENT DERATING CURVE






Fig. 5-MAXIMUM NON-REPETITIVE SURGE CURRENT

Fig. 6-TYPICAL JUNCTION CAPACITANCE



Micro Commercial Components

Ordering Information:

Device	Packing
Part Number-TP	Tape&Reel: 1.2Kpcs/Reel
Part Number-AP	Ammo Packing: 1.2Kpcs/Ammo Box
Part Number-BP	Bulk: 12Kpcs/Carton

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.