




1.00mm Pitch


Series 6208

AVAX

WITHOUT BOSS




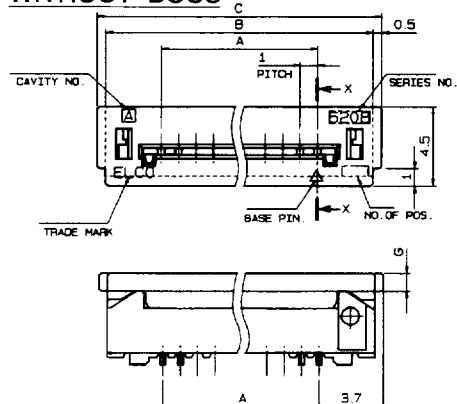


ZIF Straight SMT

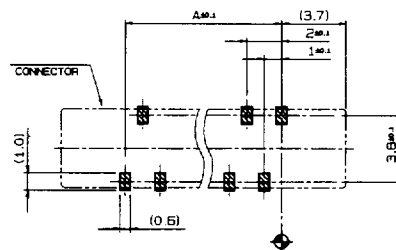


MOUNTING LAYOUT

WITH BOSS

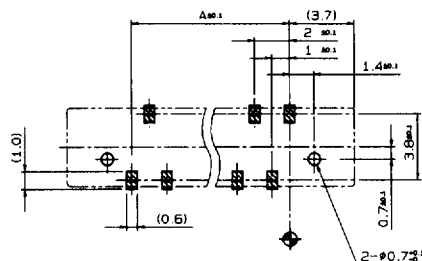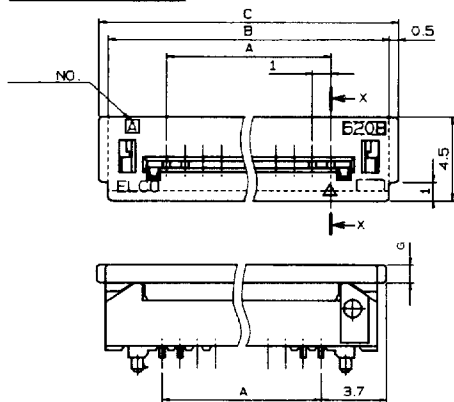

MOUNTING LAYOUT



	FFC	FPC
P	±0.05	±0.02
W	±0.03	+0.07 -0.05
M	±0.1	±0.05

FFC, FPC SPECIFICATION

ORDERING CODE

XX 6208 XXX 0XX XXX

00=TRAY
08=TUBE
PACKAGE

VARIATION CODE
500=SMT WITHOUT BOSS
520=SMT WITH BOSS (2 Places)

FLEX TYPE
000=STANDARD
009=CARBON PASTE

NUMBER
OF
CONTACTS (05-30)

PART NUMBER	NO. OF CONTACTS	A	B	C	D	E	F	G	QTY. PER TUBE	QTY. PER TRAY
XX 6208 XXX 005 XXX	5	4.0	10.4	11.4	3.4	5.0	6.5	0.8	42	310
006	6	5.0	11.4	12.4	3.4	5.0	6.5	0.8	38	290
007	7	6.0	12.4	13.4	3.4	5.0	6.5	0.8	35	260
008	8	7.0	13.4	14.4	3.4	5.0	6.5	0.8	33	250
009	9	8.0	14.4	15.4	3.4	5.0	6.5	0.8	31	230
010	10	9.0	15.4	16.4	3.4	5.0	6.5	0.8	29	220
011	11	10.0	16.4	17.4	3.4	5.0	6.5	0.8	27	200
012	12	11.0	17.4	18.4	3.4	5.0	6.5	0.8	26	190
013	13	12.0	18.4	19.4	3.4	5.0	6.5	0.8	24	180
014	14	13.0	19.4	20.4	3.4	5.0	6.5	0.8	23	170
015	15	14.0	20.4	21.4	3.4	5.0	6.5	0.8	22	160
016	16	15.0	21.4	22.4	3.4	5.0	6.5	0.8	21	150
017	17	16.0	22.4	23.4	3.4	5.0	6.5	0.8	20	150
018	18	17.0	23.4	24.4	3.4	5.0	6.5	0.8	19	140
019	19	18.0	24.4	25.4	3.4	5.0	6.5	0.8	18	140
020	20	19.0	25.4	26.4	3.4	5.0	6.5	0.8	18	130
021	21	20.0	26.4	27.4	3.4	5.2	6.7	1.0	17	130
022	22	21.0	27.4	28.4	3.4	5.2	6.7	1.0	16	120
023	23	22.0	28.4	29.4	3.4	5.2	6.7	1.0	16	120
024	24	23.0	29.4	30.4	3.4	5.2	6.7	1.0	15	110
025	25	24.0	30.4	31.4	3.4	5.2	6.7	1.0	15	110
026	26	25.0	31.4	32.4	3.4	5.5	7.0	1.3	-	110
028	28	27.0	33.4	34.4	3.4	5.5	7.0	1.3	-	100
030	30	29.0	35.4	36.4	3.4	5.5	7.0	1.3	-	100
XX 6208 XXX 030 XXX	30	29.0	35.4	36.4	3.4	5.5	7.0	1.3	-	90

*NOTE: Elco Standard for the 500 variation is Tape and Reel.
See page 37 for ordering information.

(Dimensions: mm)