


# CHOKE COILS SL TYPE

# SL0812 Series




## PRODUCT IDENTIFICATION

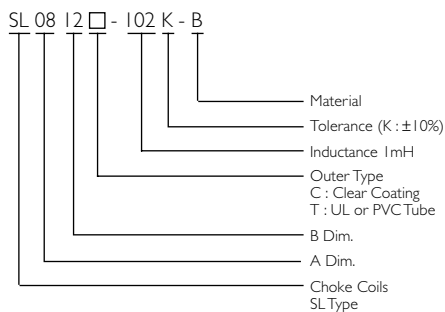

## DIMENSIONS

Dimensions : mm

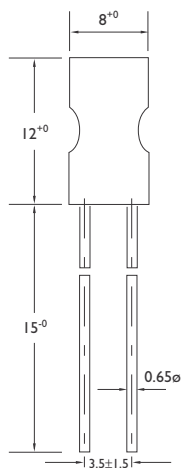

## FEATURES

- Low Cost
- Wide Range of Inductance
- High Reliability

## ELECTRICAL PARAMETERS

ITEM	INDUCTANCE L (mH)	TEST FREQ. (MHz)	Q. Min.	D.C. RESISTANCE Max. ( $\Omega$ )	IDC (mA)
SL0812 □ -102K-B	1.0	252	80	4.0	110
SL0812 □ -122K-B	1.2	252	80	4.7	95
SL0812 □ -152K-B	1.5	252	80	5.9	90
SL0812 □ -182K-B	1.8	252	80	6.0	80
SL0812 □ -222K-B	2.2	252	80	7.3	70
SL0812 □ -272K-B	2.7	252	80	9.0	65
SL0812 □ -332K-B	3.3	252	80	10	60
SL0812 □ -392K-B	3.9	252	80	11	55
SL0812 □ -472K-B	4.7	252	80	15	52
SL0812 □ -562K-B	5.6	252	80	16	50
SL0812 □ -682K-B	6.8	252	80	22	45
SL0812 □ -822K-B	8.2	252	80	25	40
SL0812 □ -103K-B	10	79.6	80	32.5	35
SL0812 □ -123K-B	12	79.6	80	53	32
SL0812 □ -153K-B	15	79.6	80	62	30
SL0812 □ -183K-B	18	79.6	80	68	28
SL0812 □ -223K-B	22	79.6	80	78	25
SL0812 □ -273K-B	27	79.6	80	90	22
SL0812 □ -333K-B	33	79.6	80	150	20
SL0812 □ -393K-B	39	79.6	80	160	16
SL0812 □ -473K-B	47	79.6	80	190	15

\* Customers' specifications are welcome.

## TEST INSTRUMENTS

• L &amp; Q : HP 4285 + HP 42851A

• RDC : CHEN HWA502BC