
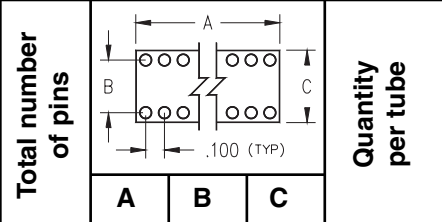


- All DIP sockets accept .015 - .025" dia. and standard IC leads.
- Lubricated contacts also available. (See page 96 for specs.)
- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.
- Uses Mill-Max #1001 pin. See page 134 for details.

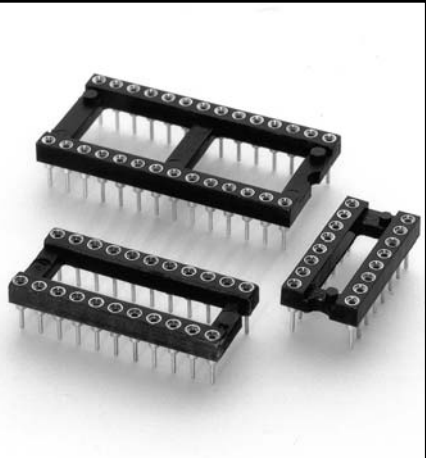

Ordering Information

Total number of pins	Pin Spacing			Quantity per tube
	A	B	C	
10	0.5	0.2	0.3	40
4	0.2	0.3	0.4	102
6	0.3	0.3	0.4	67
8	0.4	0.3	0.4	50
10	0.5	0.3	0.4	40
14	0.7	0.3	0.4	28
16	0.8	0.3	0.4	25
18	0.9	0.3	0.4	22
20	1.0	0.3	0.4	20
22	1.1	0.3	0.4	18
24	1.2	0.3	0.4	16
28	1.4	0.3	0.4	14
20	1.0	0.4	0.5	20
22	1.1	0.4	0.5	18
24	1.2	0.4	0.5	16
28	1.4	0.4	0.5	14
32	1.6	0.4	0.5	12
24	1.2	0.6	0.7	16
28	1.4	0.6	0.7	14
32	1.6	0.6	0.7	12
36	1.8	0.6	0.7	11
40	2.0	0.6	0.7	10
42	2.1	0.6	0.7	9
48	2.4	0.6	0.7	8
50	2.5	0.6	0.7	8
52	2.6	0.6	0.7	7
50	2.5	0.9	1.0	8
52	2.6	0.9	1.0	7
64	3.2	0.9	1.0	6

110-XX-210-41-001
110-XX-304-41-001
110-XX-306-41-001
110-XX-308-41-001
110-XX-310-41-001
110-XX-314-41-001
110-XX-316-41-001
110-XX-318-41-001
110-XX-320-41-001
110-XX-322-41-001
110-XX-324-41-001
110-XX-328-41-001
110-XX-420-41-001
110-XX-422-41-001
110-XX-424-41-001
110-XX-428-41-001
110-XX-432-41-001
110-XX-624-41-001
110-XX-628-41-001
110-XX-632-41-001
110-XX-636-41-001
110-XX-640-41-001
110-XX-642-41-001
110-XX-648-41-001
110-XX-650-41-001
110-XX-652-41-001
110-XX-950-41-001
110-XX-952-41-001
110-XX-964-41-001

**XX= Plating Code
See Below**

Replace '001' suffix with '361' for Lubricated contacts (To be used with "99" plating code only)

For High Temperature Insulators Add '100' To End Of Part Numbers

SPECIFY PLATING CODE XX=	13	91	93	99
Sleeve (Pin)	10μ" Au	200μ" Sn/Pb	200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)	30μ" Au	10μ" Au	30μ" Au	200μ" Sn/Pb