




**MOTOROLA**

## 1-OF-10 DECODER WITH 3-STATE OUTPUTS

The MC54/74F537 is a one-of-ten decoder/demultiplexer with four active HIGH BCD inputs and ten mutually exclusive outputs. A polarity control input determines whether the outputs are active LOW or active HIGH. The MC54/74F537 has 3-state outputs, and a HIGH signal on the Output Enable ( $\overline{OE}$ ) input forces all outputs to the high impedance state. Two input enables, active HIGH  $E_2$  and active LOW  $\overline{E}_1$ , are available for demultiplexing data to the selected output in either non-inverted or inverted form. Input codes greater than BCD nine cause all outputs to go to the inactive state (i.e., same polarity as the P input).


- Demultiplexing Capability
- 3-State Outputs
- Multiple Input Enable for Expansion
- Polarity Control Input
- ESD Protection > 4000 Volts

**CONNECTION DIAGRAM DIP (TOP VIEW)**

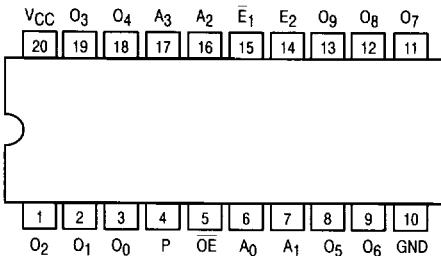

4


**LOGIC DIAGRAM**

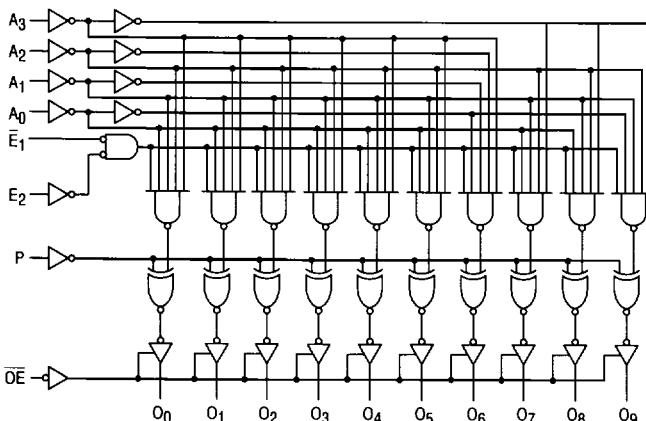


Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

**MC54/74F537**


**1-OF-10 DECODER  
WITH 3-STATE OUTPUTS**  
**FAST™ SCHOTTKY TTL**



J SUFFIX  
CERAMIC  
CASE 732-03




N SUFFIX  
PLASTIC  
CASE 738-03



DW SUFFIX  
SOIC  
CASE 751D-03

### ORDERING INFORMATION

MC54FXXXJ	Ceramic
MC74FXXXN	Plastic
MC74FXXXDW	SOIC

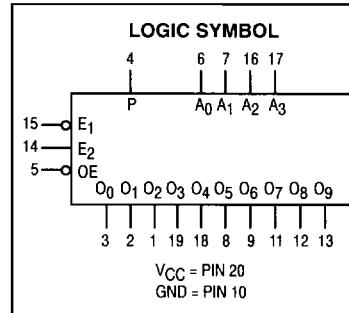

# MC54/74F537

## GUARANTEED OPERATING RANGES

Symbol	Parameter		Min	Typ	Max	Unit
V <sub>CC</sub>	Supply Voltage	54, 74	4.5	5.0	5.5	V
T <sub>A</sub>	Operating Ambient Temperature Range	54	-55	25	125	°C
		74	0	25	70	
I <sub>OH</sub>	Output Current — High	54, 74			-3.0	mA
I <sub>OL</sub>	Output Current — Low	54, 74			24	mA

## DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

Symbol	Parameter	Limits			Unit	Test Conditions
		Min	Typ	Max		
V <sub>IH</sub>	Input HIGH Voltage	2.0			V	Guaranteed Input HIGH Voltage
V <sub>IL</sub>	Input LOW Voltage			0.8	V	Guaranteed Input LOW Voltage
V <sub>IK</sub>	Input Clamp Diode Voltage			-1.2	V	I <sub>IN</sub> = -18 mA, V <sub>CC</sub> = MIN
V <sub>OH</sub>	Output HIGH Voltage	54, 74	2.4		V	I <sub>OH</sub> = -3.0 mA, V <sub>CC</sub> = 4.5 V
		74	2.7		V	I <sub>OH</sub> = -3.0 mA, V <sub>CC</sub> = 4.75 V
V <sub>OL</sub>	Output LOW Voltage			0.5	V	I <sub>OL</sub> = 24 mA, V <sub>CC</sub> = MIN
I <sub>OZH</sub>	Output OFF Current — HIGH			50	µA	V <sub>OUT</sub> = 2.7 V, V <sub>CC</sub> = MAX
I <sub>OZL</sub>	Output OFF Current — LOW			-50	µA	V <sub>OUT</sub> = 0.5 V, V <sub>CC</sub> = MAX
I <sub>IH</sub>	Input HIGH Current			20	µA	V <sub>CC</sub> = MAX, V <sub>IN</sub> = 2.7 V
				0.1	mA	V <sub>CC</sub> = MAX, V <sub>IN</sub> = 7.0 V
I <sub>IL</sub>	Input LOW Current			-0.6	mA	V <sub>CC</sub> = MAX, V <sub>IN</sub> = 0.5 V
I <sub>OS</sub>	Output Short Circuit Current (Note 2)	-60		-150	mA	V <sub>CC</sub> = MAX, V <sub>OUT</sub> = 0 V
I <sub>CCZ</sub>	Power Supply Current		44	66	mA	V <sub>CC</sub> = MAX: A <sub>0</sub> —A <sub>3</sub> , E <sub>1</sub> = GND OE, E <sub>2</sub> , P = HIGH

## AC CHARACTERISTICS

Symbol	Parameter	54/74F			54F		74F		Unit	
		T <sub>A</sub> = +25°C V <sub>CC</sub> = +5.0 V C <sub>L</sub> = 50 pF			T <sub>A</sub> = -55 to +125°C V <sub>CC</sub> = 5.0 V ± 10% C <sub>L</sub> = 50 pF		T <sub>A</sub> = 0 to 70°C V <sub>CC</sub> = 5.0 V ± 10% C <sub>L</sub> = 50 pF			
		Min	Typ	Max	Min	Max	Min	Max		
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay A <sub>n</sub> to O <sub>n</sub>	4.0 2.5		14 11	3.5 2.0	19 15	3.5 2.0	16 12	ns	
	Propagation Delay E <sub>1</sub> to O <sub>n</sub>	4.0 3.0		11 11	4.0 3.0	14 14	4.0 3.0	12 12		
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay E <sub>2</sub> to O <sub>n</sub>	6.0 4.0		11.5 11.5	5.0 4.0	15 14.5	5.0 4.0	13 12.5	ns	
	Propagation Delay P to O <sub>n</sub>	5.0 3.5		16 11.5	5.0 3.5	21 13	4.5 3.5	17 12		
t <sub>PZH</sub> t <sub>PZL</sub>	Output Enable Time OE to O <sub>n</sub>	2.5 4.0		7.0 8.0	2.5 4.0	11 10	2.5 4.0	8.0 9.0	ns	
	Output Disable Time OE to O <sub>n</sub>	1.5 1.5		6.0 6.5	1.0 1.0	8 8	1.0 1.0	7.0 7.0		

# MC54/74F537

**TRUTH TABLE**

FUNCTION	INPUTS						OUTPUTS										
	$\overline{OE}$	$\overline{E}_1$	$E_2$	$A_3$	$A_2$	$A_1$	$A_0$	$O_0$	$O_1$	$O_2$	$O_3$	$O_4$	$O_5$	$O_6$	$O_7$	$O_8$	$O_9$
HIGH Impedance	H	X	X	X	X	X	X	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
Disable	L	H	X	X	X	X	X	Outputs Equal P Input									
	L	L	H	L	L	L	L	H	L	L	L	L	L	L	L	L	L
	L	L	H	L	L	L	H	L	H	L	L	L	L	L	L	L	L
	L	L	H	L	L	H	L	L	L	H	L	L	L	L	L	L	L
	L	L	H	L	L	H	H	L	L	L	H	L	L	L	L	L	L
Active HIGH Output ( $P = L$ )	L	L	H	L	H	L	L	L	L	L	H	L	L	L	L	L	L
	L	L	H	L	H	L	H	L	L	L	H	L	L	L	L	L	L
	L	L	H	L	H	H	L	L	L	L	L	L	L	L	L	L	L
	L	L	H	H	X	H	X	L	L	L	L	L	L	L	L	L	L
	L	L	H	H	X	X	X	L	L	L	L	L	L	L	L	L	L
Active LOW Output ( $P = H$ )	L	L	H	L	L	L	L	L	H	H	H	H	H	H	H	H	H
	L	L	H	L	H	L	H	H	L	H	H	H	H	H	H	H	H
	L	L	H	L	H	H	L	H	H	L	H	H	H	H	H	H	H
	L	L	H	L	H	H	H	H	H	H	L	H	H	H	H	H	H
	L	L	H	H	L	L	H	H	H	H	H	H	H	H	L	H	H
	L	L	H	H	X	H	X	H	H	H	H	H	H	H	H	H	H
	L	L	H	H	H	X	X	H	H	H	H	H	H	H	H	H	H

H = HIGH Voltage Level

L = LOW Voltage Level

X = Don't Care

Z = High Impedance