


C 091 A

Male receptacle,
screw locking,
front mounting

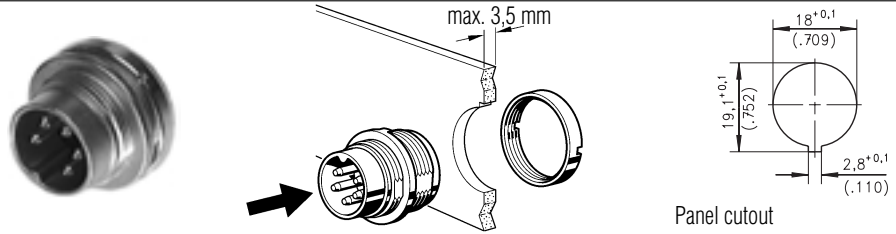

Description	Drawing	No. of cont.	Part Number solder termination			Part No. Crimp termination ¹⁾ ring nut
			Contact plating silver ring nut	hex nut	Contact plating gold ²⁾ ring nut	
Male receptacle, termination: solder or crimp, panel mounting with ring or hex nut, contact plating: silver or gold. solder area: tin plated		2	T 3202 000	T 3202 009	T 3202 018	—
		3 DIN	T 3262 000	T 3262 009	T 3262 018	T 3262 550
		4 IEC	T 3302 000	T 3302 009	T 3302 018	T 3302 550
		5	T 3362 000	T 3362 009	T 3362 018	T 3362 550
		5 S DIN	T 3362 010	T 3358 009	T 3358 018 ⁴⁾	T 3358 550 ⁴⁾
		6 DIN	T 3402 000	T 3402 009	T 3402 018	T 3402 550
		7	T 3477 000	T 3477 009	T 3477 018	T 3477 550
		7 DIN	T 3486 000	T 3486 009	T 3486 018	T 3486 550 ⁴⁾
		8 DIN	T 3506 000	T 3506 009	T 3506 018	T 3506 550 ⁴⁾
		12	T 3637 001	T 3637 009	T 3637 000	—
		14	T 3652 001	T 3652 009	T 3652 000	—
Male receptacle, termination: straight dip solder, pin length 10.5 mm from flange, panel mounting with ring nut, contact plating: silver or gold. solder area: tin plated		2	T 3202 300 ⁴⁾	—	—	—
		3 DIN	T 3262 300	—	—	—
		4 IEC	T 3302 300 ⁴⁾	—	—	—
		5	T 3362 300 ⁴⁾	—	—	—
		5 S DIN	T 3358 300 ⁴⁾	—	—	—
		6 DIN	T 3402 300 ⁴⁾	—	—	—
		7	T 3477 300 ⁴⁾	—	—	—
		7 DIN	T 3486 300 ⁴⁾	—	—	—
		8 DIN	T 3506 300 ⁴⁾	—	—	—
		12	—	—	T 3637 304 ⁴⁾	—
		14	—	—	T 3652 304 ⁴⁾	—

¹⁾ Please order crimp contacts separately, see page 46 ²⁾ see remark page 9

⁴⁾ Available upon request. Min. order qty. 100 pcs/type.