


Fig. 1

- Ultra low profile receptacles sit 0,46 above the board.
- Series 714 uses M-M# 0552-1, 0552-2 pin receptacles. See page 127 for details.
- Hi-Rel, 3-finger BeCu #11 clip is rated at 3amps. See page 206 for details.

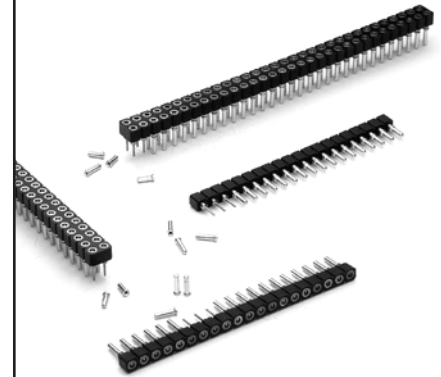

Ordering Information

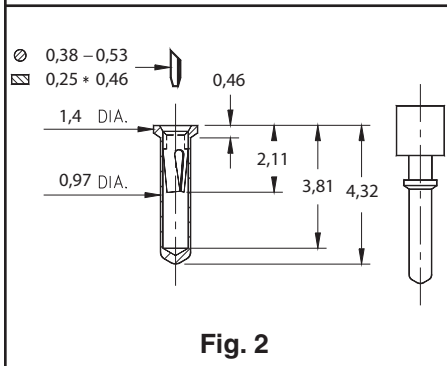


Fig. 2

Fig. 1

Single Row (0,99 min. mounting hole)

714-XX-1__-31-012000
Specify # of pins **01-64**

Fig. 2

Single Row (0,99 min. mounting hole)

714-XX-1__-31-018000
Specify # of pins **01-64**

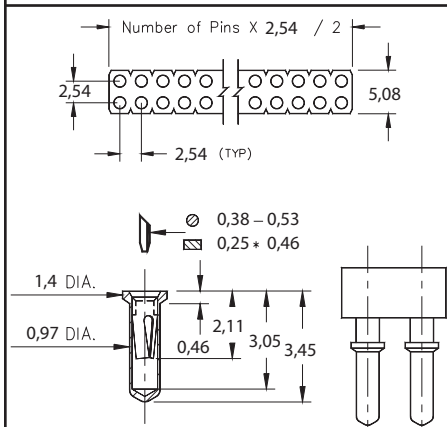


Fig. 3

Fig. 3

Double Row (0,99 min. mounting hole)

714-XX-2__-31-012000
Specify # of pins **02-64**

Fig. 4

Double Row (0,99 min. mounting hole)

714-XX-2__-31-018000
Specify # of pins **02-64**

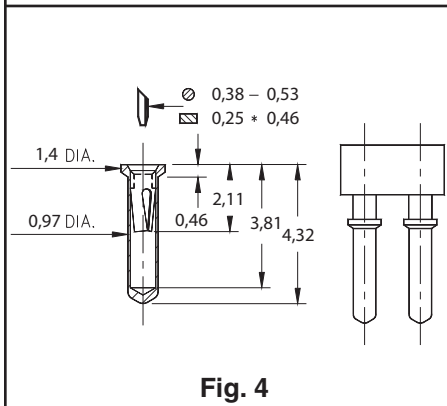


Fig. 4

XX=Plating Code
See Below



For RoHS compliance, select \diamond plating code. For the all gold option (XX=13) also change part number from 714-XX-XXX-31-01X000 to 714-13-XXX-31-01X100

SPECIFY PLATING CODE XX=	13 \diamond	93	99	43 \diamond	44 \diamond
Sleeve (Pin)	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn/Pb	5,08µm Sn	5,08µm Sn
Contact (Clip)	0,76µm Au	0,76µm Au	5,08µm Sn/Pb	0,76µm Au	5,08µm Sn