



RECTIFIERS SMA CASE

TYPE NO.	PVR	IO @	TA	IFM	IR	VF		trr
	(V)	(mA)	(C)	SURGE	@ PRV	IFM	vfm	(ns)
				(A PK)	(uAdc)	(Apk)	(vpk)	
EM401	50	1.0	75	30	5.0	1.0	1.1	-
EM402	100	1.0	75	30	5.0	1.0	1.1	-
EM403	200	1.0	75	30	5.0	1.0	1.1	-
EM404	400	1.0	75	30	5.0	1.0	1.1	-
EM405	600	1.0	75	30	5.0	1.0	1.1	-
EM406	800	1.0	75	30	5.0	1.0	1.1	-
EM407	1000	1.0	75	30	5.0	1.0	1.1	-
FEM401	50	1.0	55	30	5.0	1.0	1.3	150
FEM402	100	1.0	55	30	5.0	1.0	1.3	150
FEM403	200	1.0	55	30	5.0	1.0	1.3	150
FEM404	400	1.0	55	30	5.0	1.0	1.3	150
FEM405	600	1.0	55	30	5.0	1.0	1.3	150
FEM406	800	1.0	55	30	5.0	1.0	1.3	150
FEM407	1000	1.0	55	30	5.0	1.0	1.3	150
UEM401	50	1	55	30	5.0	1.0	0.95	35
UEM402	100	1	55	30	5.0	1.0	0.95	35
UEM403	150	1	55	30	5.0	1.0	0.95	35
UEM404	200	1	55	30	5.0	1.0	0.95	35
UEM405	300	1	55	30	5.0	1.0	0.95	35
UEM406	400	1	55	30	5.0	1.0	0.95	35



BRIDGE RECTIFIERS DIP CASE



TYPE NO.	PVR	IO @	TA	IFM	IR	VF		trr
	(V)	(mA)	(C)	SURGE	@ PRV	IFM	vfm	(ns)
				(A PK)	(uAdc)	(Apk)	(vpk)	
PL05S	50	1.0	50	50	5.0	1.0	1.2	-
PL20S	200	1.0	50	50	5.0	1.0	1.2	-
PL40S	400	1.0	50	50	5.0	1.0	1.2	-
PL60S	600	1.0	50	50	5.0	1.0	1.2	-
PL80S	800	1.0	50	50	5.0	1.0	1.2	-







BRIDGE RECTIFIERS MINI DIP CASE

TYPE NO.	PVR	IO @	TA	IFM	IR	VF		trr
	(V)	(mA)	(C)	SURGE	@ PRV	IFM	vfm	(ns)
				(A PK)	(uA dc)	(A pk)	(v pk)	
PZ20S	200	0.8	50	30	10.0	0.8	1.05	-
PZ60S	600	0.8	50	30	10.0	0.8	1.05	-

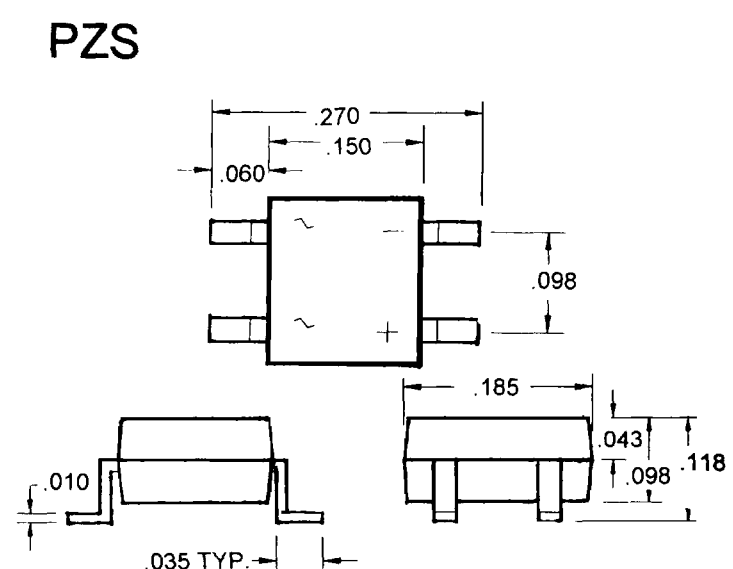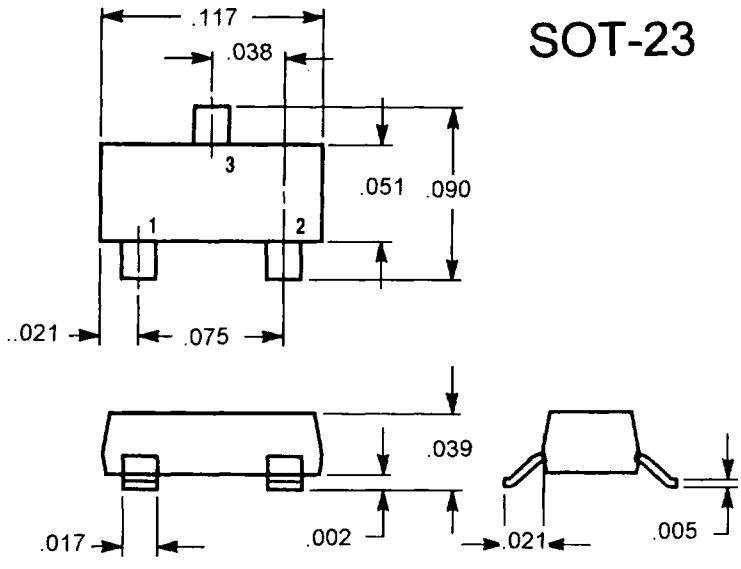

All dimensions in inches • Dimensions are nominal; please contact factory for exact current dimensions.

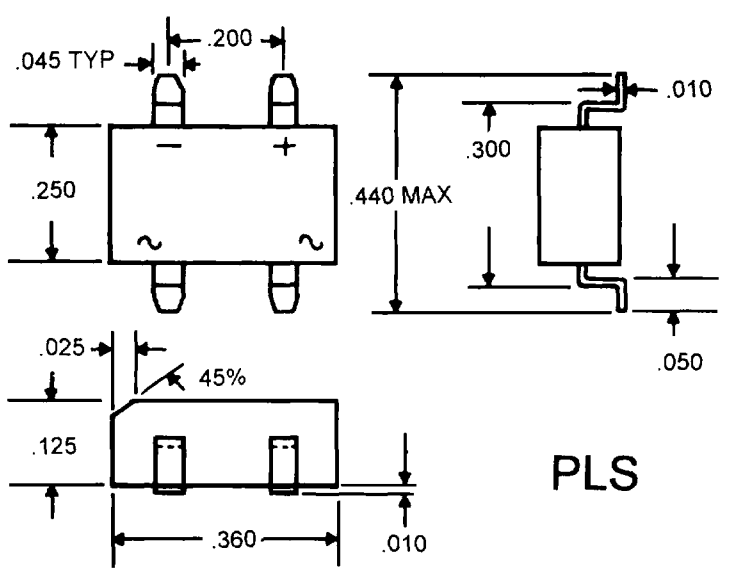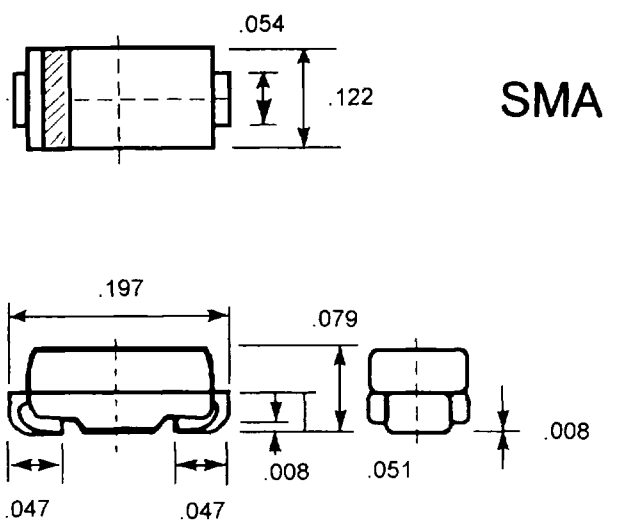

A Complete Catalog is Available on these SMD Products.
Electronic Devices also manufactures extensive lines of Rectifiers, Diodes, and HV Assemblies.