

## MMBZ5226B - MMBZ5257B Series Zeners

Tolerance: B = 5%

### Absolute Maximum Ratings\*


TA = 25°C unless otherwise noted

Parameter	Value	Units
Storage Temperature Range	-55 to +150	°C
Maximum Junction Operating Temperature	+ 150	°C
Total Device Dissipation	350	mW
Derate above 25°C	1.8	mW/°C

\*These ratings are limiting values above which the serviceability of the diode may be impaired.

#### NOTES:

- 1) These ratings are based on a maximum junction temperature of 150 degrees C.
- 2) These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

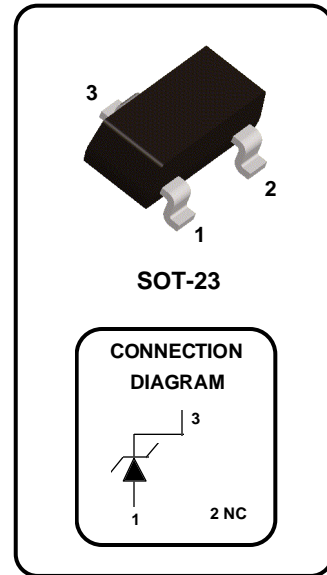

### Electrical Characteristics

TA = 25°C unless otherwise noted

Device	Mark	V <sub>Z</sub> (V)	Z <sub>Z</sub> (Ω)	@	I <sub>ZT</sub> (mA)	Z <sub>ZK</sub> (Ω)	@	I <sub>ZK</sub> (mA)	V <sub>R</sub> (V)	@	I <sub>R</sub> (μA)
<b>MMBZ 5226B</b>	8A	3.3	28		20	1,600	0.25		1.0		25
MMBZ 5227B	8B	3.6	24		20	1,700	0.25		1.0		15
MMBZ 5228B	8C	3.9	23		20	1,900	0.25		1.0		10
<b>MMBZ 5229B</b>	8D	4.3	22		20	1,000	0.25		1.0		5.0
<b>MMBZ 5230B</b>	8E	4.7	19		20	1,900	0.25		2.0		5.0
<b>MMBZ 5231B</b>	8F	5.1	17		20	1,600	0.25		2.0		5.0
<b>MMBZ 5232B</b>	8G	5.6	11		20	1,600	0.25		3.0		5.0
MMBZ 5233B	8H	6.0	7.0		20	1,600	0.25		3.5		5.0
<b>MMBZ 5234B</b>	8J	6.2	7.0		20	1,000	0.25		4.0		5.0
<b>MMBZ 5235B</b>	8K	6.8	5.0		20	750	0.25		5.0		3.0
<b>MMBZ 5236B</b>	8L	7.5	6.0		20	500	0.25		6.0		3.0
<b>MMBZ 5237B</b>	8M	8.2	8.0		20	500	0.25		6.5		3.0
MMBZ 5238B	8N	8.7	8.0		20	600	0.25		6.5		3.0
<b>MMBZ 5239B</b>	8P	9.1	10		20	600	0.25		7.0		3.0
<b>MMBZ 5240B</b>	8Q	10	17		20	600	0.25		8.0		3.0
MMBZ 5241B	8R	11	22		20	600	0.25		8.4		2.0
<b>MMBZ 5242B</b>	8S	12	30		20	600	0.25		9.1		1.0

V<sub>F</sub> Forward Voltage = 0.9 V Maximum @ I<sub>F</sub> = 10 mA for all MMBZ 5200 series

**NOTE:** National preferred devices in **BOLD**

## MMBZ Series Zeners

(continued)

### Electrical Characteristics (continued) TA = 25°C unless otherwise noted

Device	Mark	V <sub>Z</sub> (V)	Z <sub>Z</sub> (Ω)	I <sub>ZT</sub> (mA)	Z <sub>ZK</sub> (Ω)	I <sub>ZK</sub> (mA)	V <sub>R</sub> (V)	I <sub>R</sub> (nA)
MMBZ 5243B	8T	13	13	9.5	600	0.25	9.9	500
MMBZ 5244B	8U	14	15	9.0	600	0.25	10	100
<b>MMBZ 5245B</b>	8V	15	16	8.5	600	0.25	11	100
MMBZ 5246B	8W	16	17	7.8	600	0.25	12	100
MMBZ 5247B	8X	17	19	7.4	600	0.25	13	100
MMBZ 5248B	8Y	18	21	7.0	600	0.25	14	100
MMBZ 5249B	8Z	19	23	6.6	600	0.25	14	100
MMBZ 5250B	81A	20	25	6.2	600	0.25	15	100
MMBZ 5251B	81B	22	29	5.6	600	0.25	17	100
MMBZ 5252B	81C	24	33	5.2	600	0.25	18	100
MMBZ 5253B	81D	25	35	5.0	600	0.25	19	100
<b>MMBZ 5254B</b>	81E	27	41	4.6	600	0.25	21	100
<b>MMBZ 5255B</b>	81F	28	44	4.5	600	0.25	21	100
MMBZ 5256B	81G	30	49	4.2	600	0.25	23	100
MMBZ 5257B	81H	33	58	3.8	700	0.25	25	100

**V<sub>F</sub>** Forward Voltage = 0.9 V Maximum @ I<sub>F</sub> = 10 mA for all MMBZ 5200 series

**NOTE:** National preferred devices in **BOLD**

MMBZ5226B - MMBZ5257B Series

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	ISOPLANAR™
CoolFET™	MICROWIRE™
CROSSVOLT™	POP™
E <sup>2</sup> CMOS™	PowerTrench™
FACT™	QS™
FACT Quiet Series™	Quiet Series™
FAST®	SuperSOT™-3
FASTr™	SuperSOT™-6
GTO™	SuperSOT™-8
HiSeC™	TinyLogic™

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.