


- Our lowest profile DIP sockets with an above PCB height of .095".
- Special short, Hi-Rel, 4-finger BeCu #12 clip rated at 3 amps. See page 207 for details.
- Uses Mill-Max #0703 pin. See page 130 for details.

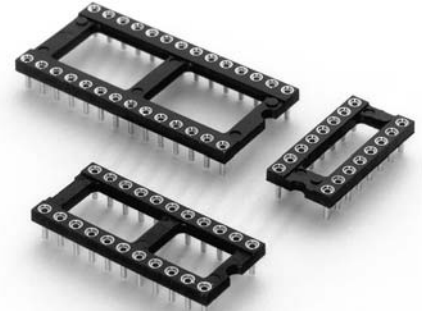

Total number of pins	Pin Spacing			Quantity per tube	Ordering Information
	A	B	C		

Total number of pins	Pin Spacing			Quantity per tube
	A	B	C	
6	0.3	0.3	0.4	67
8	0.4	0.3	0.4	50
14	0.7	0.3	0.4	28
16	0.8	0.3	0.4	25
18	0.9	0.3	0.4	22
20	1.0	0.3	0.4	20
22	1.1	0.3	0.4	18
24	1.2	0.3	0.4	16
28	1.4	0.3	0.4	14
20	1.0	0.4	0.5	20
22	1.1	0.4	0.5	18
24	1.2	0.4	0.5	16
28	1.4	0.4	0.5	14
24	1.2	0.6	0.7	16
28	1.4	0.6	0.7	14
32	1.6	0.6	0.7	12
36	1.8	0.6	0.7	11
40	2.0	0.6	0.7	10
48	2.4	0.6	0.7	8
50	2.5	0.6	0.7	8

XX= Plating Code
See Below

- 115-XX-306-41-003
- 115-XX-308-41-003
- 115-XX-314-41-003
- 115-XX-316-41-003
- 115-XX-318-41-003
- 115-XX-320-41-003
- 115-XX-322-41-003
- 115-XX-324-41-003
- 115-XX-328-41-003
- 115-XX-420-41-003
- 115-XX-422-41-003
- 115-XX-424-41-003
- 115-XX-428-41-003
- 115-XX-624-41-003
- 115-XX-628-41-003
- 115-XX-632-41-003
- 115-XX-636-41-003
- 115-XX-640-41-003
- 115-XX-648-41-003
- 115-XX-650-41-003

For High Temperature Insulators
Add '100'
To End Of Part Numbers

SPECIFY PLATING CODE XX=	13	91	93	99
Sleeve (Pin)	10µ" Au	200µ" Sn/Pb	200µ" Sn/Pb	200µ" Sn/Pb
Contact (Clip)	30µ" Au	10µ" Au	30µ" Au	200µ" Sn/Pb