

Inductors, Epoxy Conformal Coated, Axial Leaded



ELECTRICAL SPECIFICATIONS

Inductance Range: 1000 μH to 39 000 μH

Inductance Tolerance: $\pm 10\%$ standard, $\pm 5\%$ optional

Operating Temperature Range: $-20\text{ }^\circ\text{C}$ to $+105\text{ }^\circ\text{C}$

Dielectric Strength: 250 V_{RMS}

MECHANICAL SPECIFICATIONS

Terminal Strength: Pull = 5 pounds, twist = $360\text{ }^\circ\text{C} \times 3$

Protection: Epoxy uniform roll coated

Leads: Tinned copper

ENVIRONMENTAL SPECIFICATIONS

Maximum Temperature Rise: $+20\text{ }^\circ\text{C}$


FEATURES

- Axial lead type, small lightweight design
- Special magnetic core structure contributes to high Q and self-resonant frequencies
- Treated with epoxy resin coating for humidity resistance to ensure long life
- Heat resistant adhesives and special structural design for effective open circuit measurement
- Compliant to RoHS directive 2002/95/EC



RoHS
COMPLIANT

DIMENSIONS in inches [millimeters]

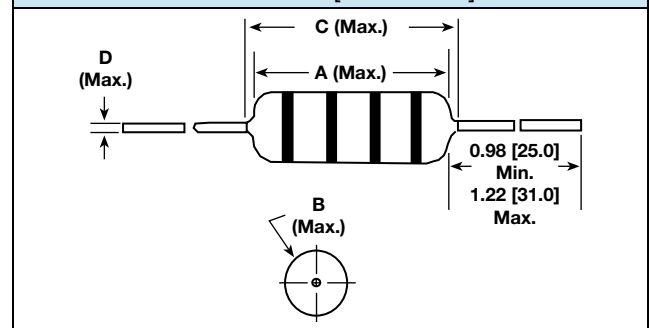

MODEL	A (MAX.)	B (MAX.)	C (MAX.)	D (MAX.)
IRF-46	0.236 [6.0]	0.197 [5.0]	0.551 [14.0]	0.026 [0.65]

STANDARD ELECTRICAL SPECIFICATIONS

MODEL	IND. (μH)	TOL. (%)	Q MIN.	TEST FREQUENCY (MHz)	SRF MIN. (MHz)	DCR MAX. (Ω)	RATED DC CURRENT (mA)
IRF-46	1000	$\pm 5, \pm 10$	80	2.52	8	1.7	200
IRF-46	1200	$\pm 5, \pm 10$	80	2.52	9	1.5	180
IRF-46	1500	$\pm 5, \pm 10$	80	2.52	10	1.4	160
IRF-46	1800	$\pm 5, \pm 10$	80	2.52	11	1.3	150
IRF-46	2200	$\pm 5, \pm 10$	80	2.52	14	1.2	120
IRF-46	2700	$\pm 5, \pm 10$	80	2.52	18	1.0	110
IRF-46	3300	$\pm 5, \pm 10$	80	2.52	22	0.9	105
IRF-46	3900	$\pm 5, \pm 10$	80	2.52	26	0.8	100
IRF-46	4700	$\pm 5, \pm 10$	80	2.52	30	0.7	95
IRF-46	5600	$\pm 5, \pm 10$	60	2.52	34	0.7	80
IRF-46	6800	$\pm 5, \pm 10$	60	2.52	48	0.5	75
IRF-46	8200	$\pm 5, \pm 10$	60	2.52	62	0.5	70
IRF-46	10 000	$\pm 5, \pm 10$	60	2.52	74	0.5	65
IRF-46	12 000	$\pm 5, \pm 10$	50	2.52	88	0.4	60
IRF-46	15 000	$\pm 5, \pm 10$	50	2.52	102	0.4	55
IRF-46	18 000	$\pm 5, \pm 10$	40	0.0796	150	0.3	50
IRF-46	22 000	$\pm 5, \pm 10$	40	0.0796	180	0.3	45
IRF-46	27 000	$\pm 5, \pm 10$	40	0.0796	210	0.3	40
IRF-46	30 000	$\pm 5, \pm 10$	40	0.0796	240	0.3	35
IRF-46	33 000	$\pm 5, \pm 10$	40	0.0796	250	0.2	30
IRF-46	39 000	$\pm 5, \pm 10$	40	0.0796	270	0.2	25

IRF-46

Vishay Dale

Inductors, Epoxy Conformal Coated, Axial
Leaded



ORDERING INFORMATION

IRF-46 MODEL	15 000 μH INDUCTANCE VALUE	± 10 % INDUCTANCE TOLERANCE	ER PACKAGE CODE	e3 JEDEC LEAD (Pb)-FREE STANDARD
------------------------	--	---	------------------------------	---

GLOBAL PART NUMBER

<table border="0"><tr><td>I</td><td>R</td><td>F</td><td>4</td><td>6</td></tr><tr><td colspan="5">MODEL</td></tr></table>	I	R	F	4	6	MODEL					<table border="0"><tr><td>E</td><td>R</td></tr><tr><td colspan="2">PACKAGE CODE</td></tr></table>	E	R	PACKAGE CODE		<table border="0"><tr><td>1</td><td>5</td><td>3</td></tr><tr><td colspan="3">INDUCTANCE VALUE</td></tr></table>	1	5	3	INDUCTANCE VALUE			<table border="0"><tr><td>K</td></tr><tr><td>INDUCTANCE TOLERANCE</td></tr></table>	K	INDUCTANCE TOLERANCE
I	R	F	4	6																					
MODEL																									
E	R																								
PACKAGE CODE																									
1	5	3																							
INDUCTANCE VALUE																									
K																									
INDUCTANCE TOLERANCE																									



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.