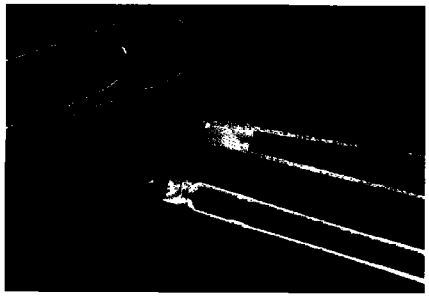

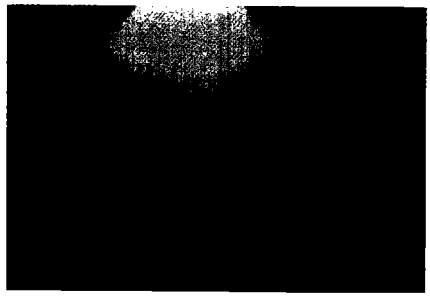

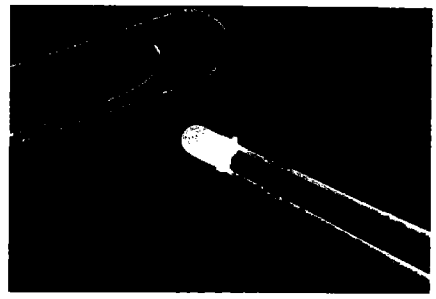

SSL-LX3044XX SERIES — SHORT T-3mm LED LAMPS

FEATURES
- HLMP-1300 Equivalent
- Short Lens Package
- Three Color Choices
- Bi-Color Options

APPLICATIONS
- Indicators-Panel/P.C.
- Switches
- Data Line Indicators
- Legend Illuminations

OPTIONS AVAILABLE
- Add-on Leads
- Panel Mount Bezles
- P.C. Mount Assemblies
- Add-on Spacers

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	EPOXY LENS COLOR	BRIGHTNESS TYP(mcd.)	If(mA)	VIEW ANGLE	Vf@20mA TYP.	MAX
SSL-LX 3044 ID	RED	635	RED DIFF.	10	20	80	2.0	2.8
SSL-LX 3044 SRD	RED	660	RED DIFF.	80	20	80	1.7	2.2
SSL-LX 3044 GD	GREEN	565	GREEN DIFF.	15	20	80	2.1	2.8
SSL-LX 3044 YD	YELLOW	585	YELLOW DIFF.	15	20	80	2.1	2.8
BI-COLOR OPTIONS								
SSL-LX 3044 IGW	RED/GREEN	635/565	WHITE DIFF.	5/4	20/20	95	2.0	2.8
LOW CURRENT OPTIONS								
SSL-LX 3044 LID	RED	635	RED DIFF	1.5	2	80	2.0	2.8
SSL-LX 3044 LGD	GREEN	565	GREEN DIFF.	1.5	2	80	2.1	2.8
SSL-LX 3044 LYD	YELLOW	585		1.5	3	80	2.1	2.8
SSL-LX 3044 ERD	RED	660	RED DIFF.	5.0	2	80	1.7	2.2

See pages 8 -14 for Max. operating limits and operating curves

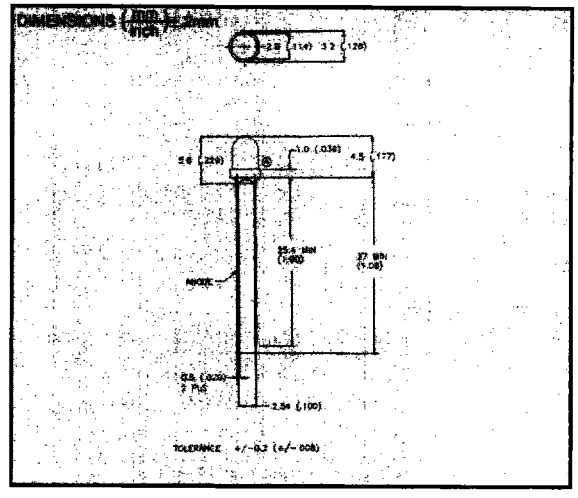

SSA-LXB26852XX SERIES — 5-9 POSITION 3mm LED ARRAY

FEATURES
- 5-9 Position Array
- Variable Length Holder
- Five Colors

APPLICATIONS
- Ladder Indicators
- Status Indicators
- Volume Indicators

MATERIAL SPECIFICATIONS
- Holder: V94-0 Nylon
- Terminals 0.5mm Pins Tin Dipped

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	OPERATING CURRENT(mA)	OPERATING (TYP volts)(V)	BRIGHTNESS TYP(MRD)	mA	LED SERIES USED
SSA-LXB26852AD	AMBER	610	10-25	2.1	20	20	SSL-LX305F4XX
SSA-LXB26852GD	GREEN	565	10-25	2.1	20	20	SSL-LX305F4XX
SSA-LXB26852ID	RED	635	10-25	2.1	20	20	SSL-LX305F4XX
SSA-LXB26852SRD	RED	660	10-25	1.7	80	20	SSL-LX305F4XX
SSA-LXB26852YD	YELLOW	585	10-25	2.1	20	20	SSL-LX305F4XX
LOW CURRENT OPTIONS							
SSA-LXB26852LGD	GREEN	565	1-5	1.8	1.0 Min	2	SSL-LX305F4XX
SSA-LXB26852LID	RED	635	1-5	1.8	1.0 Min	2	SSL-LX305F4XX
SSA-LXB26852LYD	YELLOW	585	1-5	1.8	1.0 Min	2	SSL-LX305F4XX
FIXED VOLTAGE OPTIONS							
SSA-LXB26852GD-5V	GREEN	565	10-25	5.0	20	20	SSL-LX305F4XX
SSA-LXB26852ID-5V	RED	635	10-25	5.0	30	20	SSL-LX305F4XX
SSA-LXB26852YD-5V	YELLOW	585	10-25	5.0	20	20	SSL-LX305F4XX
COLORS CAN BE MIXED TO CUSTOMER REQUIREMENTS							

See pages 8 -14 for Max. operating limits and operating curves

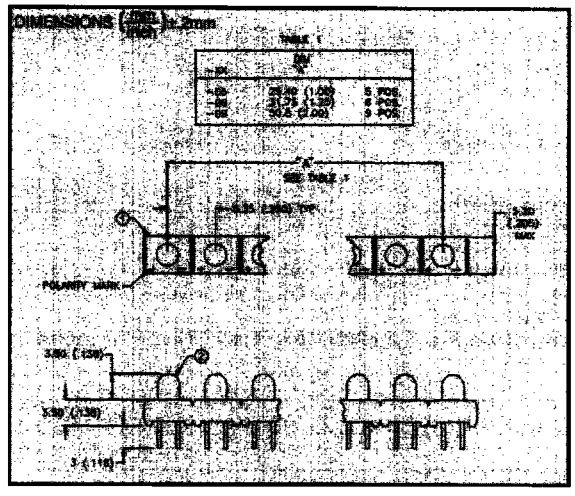

SSL-LX3054TXX SERIES — T-3mm THIN FLANGE LED LAMPS

FEATURES
- GI MV5074 Type Compatible
- Thin Flange (.5mm)
- Three Color Choices
- Bi-Color Options

APPLICATIONS
- Indicators-Panel/P.C.
- Switches
- Data Line Indicators
- Legend Illuminations

OPTIONS AVAILABLE
- Add-on Leads
- Spacers

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	EPOXY LENS COLOR	BRIGHTNESS TYP(mcd.)	If(mA)	VIEW ANGLE	Vf@20mA TYP	MAX
SSL-LX3054TID	RED	635	RED DIFF.	10	20	80	2.0	2.8
SSL-LX3054TSRD	RED	660	RED DIFF.	80	20	80	1.7	2.2
SSL-LX3054TGD	GREEN	565	GREEN DIFF.	15	20	80	2.1	2.8
SSL-LX3054TYD	YELLOW	585	YELLOW DIFF	15	20	80	2.1	2.8
BI-COLOR OPTIONS								
SSL-LX3054T IGW	RED/GREEN	635/565	WHITE DIFF	5/4	20/20	95	2.0	2.8
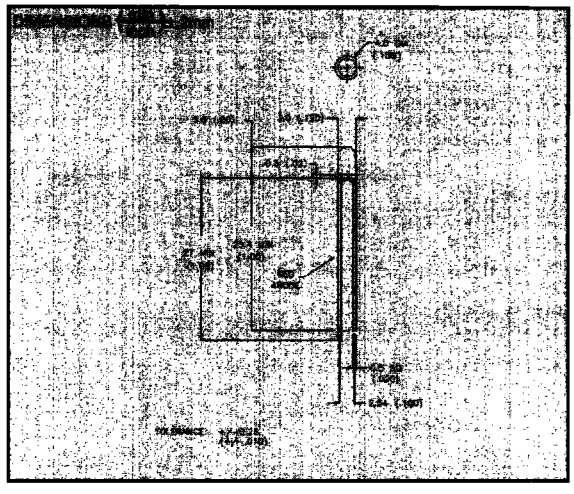
See pages 8 -14 for Max. operating limits and operating curves