




**Mil-T-55155  
Insulated Terminals**

**Ceramic**

PART NO.	"X"	"T"	DWV
4554 A	.250	6-32	2000
4554 B	.375	6-32	2000

MIL-T-55155/21-3 & 4


**PART NO. 4554**

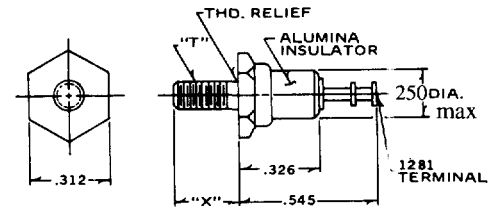

PART NO.	"X"	"T"	DWV
4553 A	.250	4-40	1500
4553 B	.375	4-40	1500


D.W.V. at Sea Level 1500 VAC  
MIL-T-55155/21-1 & 2

**PART NO. 4553**

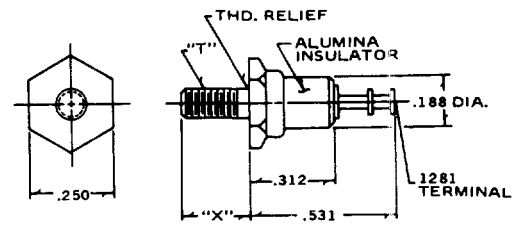

D.W.V. at Sea Level 3,300 VAC  
MIL-T-55155/1-1

**PART NO. 4519**

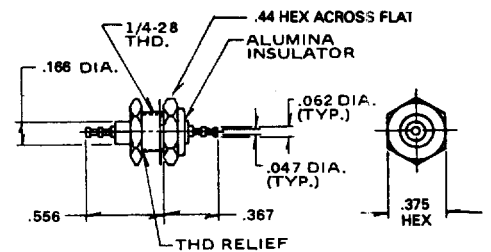

**Standard Plating Suffix to Part Number**  
See Page 93 for all plating options.

**Terminal**  
-4 (Sb over Cu)

**Base**  
-51 (Sn over Cu)

TOLERANCE: .xxx ±.015 (ALL DIMS. BEFORE PLATING)