

1. Material Substrate GaAlAs (N Type) Removed
Epitaxial Layer GaAlAs (P/N Type)

2. Electrode N(Cathode) Side Gold Alloy
P(Anode) Side Gold Alloy


3. Electro-Optical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Forward Voltage	$V_{F(1)}$		1.1		V	IF=10uA
	$V_{F(2)}$		1.4	1.6	V	IF=50mA
Reverse Voltage	V_R	4			V	IR=10uA
Power	P_O	2	4		mW	IF=50mA
Wavelength	λ_P		900		nm	IF=50mA
	$\Delta\lambda$		40		nm	IF=50mA

※ Note : Power is measured by Sorter E/T system with bare chip.

4. Mechanical Data

- (a) Emission Area ----- 12.8mil x 12.8mil
- (b) Bottom Area ----- 13.8mil x 13.8mil
- (c) Bonding Pad ----- 150um
- (d) Chip Thickness ----- 7mil
- (e) Junction Height ----- 6.4mil

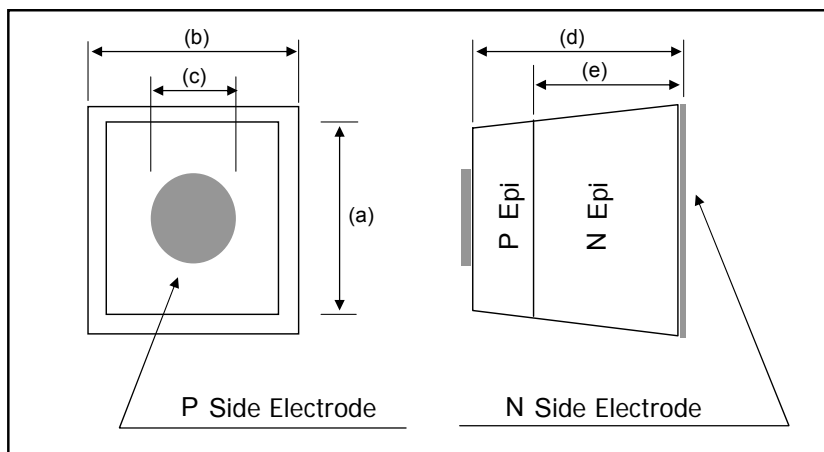

AUK Corp.

Eoyang factory, 513-5 Eoyang-dong, Iksan, 570-210, Korea
Tel. +82 63 839 1111 Fax. +82 63 835 8259

www.auk.co.kr

