


## DIN 41612

## TYPE B - MALE

- 16, 32 and 64 Contacts
- 2 Rows
- Class 2 and 3
- 2.54mm(0.1"), 5.08mm(0.2" Half loaded) Pitch
- High Reliability
- UL Approved

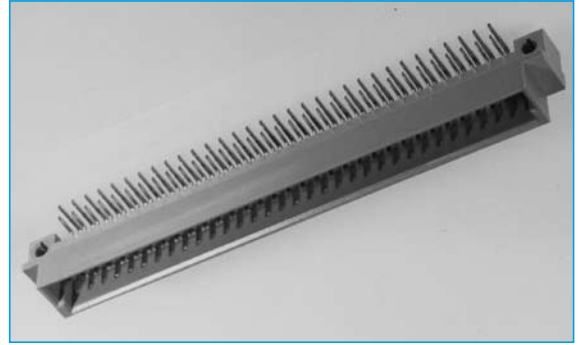

### SPECIFICATION

#### Material

**Insulator:** Glass filled polyester (PBT, UL flammability 94V-0)

**Contacts:** Female copper alloy, male brass

**Contact finish:** Contact area: Gold over nickel (per requirements of performance class 3, class 2)  
Termination area: Tin - plated or Gold-plated for long wrap post

#### Mechanical

**Insertion force:** 64 contacts max. 60N  
32 contacts max. 30N  
16 contacts max. 15N  
Withdrawal force per contact: min 0.15N

**Temperature range:** -55°C to +125°C  
Air and creepage distance 1.2mm min.

#### Electrical

**Current rating:** 20°C 2A  
70°C 1A  
100°C 0.5A

**Contact resistance:** ≤20mΩ (testing current 100mA)  
≤40mΩ after 400 mating cycles

**Capacitance between adjacent contacts:** Appr. 2pF

**Insulation resistance:** ≥10<sup>12</sup>Ω (between adjacent contacts at 100 VDC)


**Test voltage:** 1,000Vrms between contacts (2.54mm spacing)  
1,550Vrms between contacts (5.08mm spacing)  
1,550Vrms between contacts and body

**Operating voltage:** 250V AC

#### Agency approval

U/L Electric rating: 250V, 2A  
Mating Cycles: Class 2 = 400 Class 3 = 50

### OUTLINE DRAWING

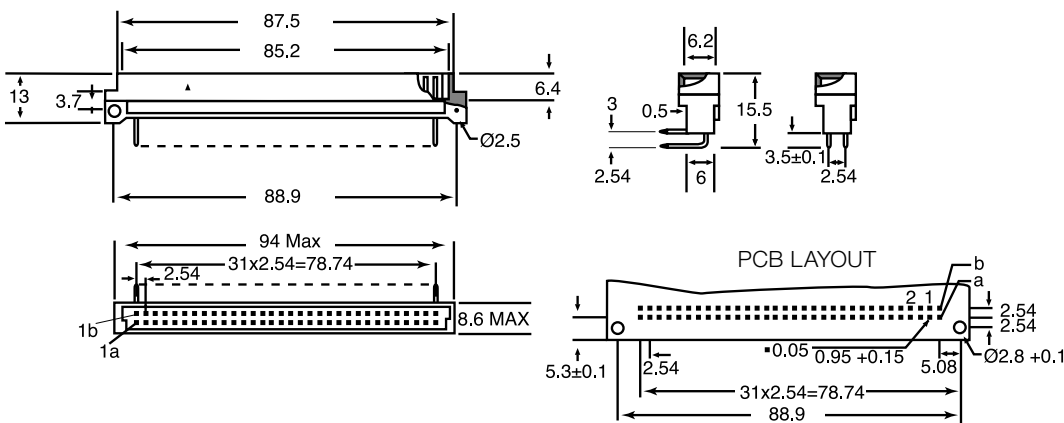

a + b	
a	
a + b All even no.	
a All even no.	


### ORDERING INFORMATION

DBC	DIN	M	16	B	A1	S	3
Dubilier Connectors	Series DIN 41612	Connector Type M = Male	N° of Ways 16=16 ways 32=32 ways 64=64 ways	Housing Style B = B	Position of Contacts A = A row AB = A+B rows A1 = A even n°. AB1=AB even n°.	Termination Style S = Straight Solder RA = Right Angled Solder	Quality Class 3 = class 3 2 = class 2

## DIN 41612

## TYPE B – FEMALE

- 16, 32 and 64 Contacts
- 2 Rows
- Class 2 and 3
- 2.54mm(0.1"), 5.08mm(0.2" Half loaded) Pitch
- High Reliability
- UL Approved

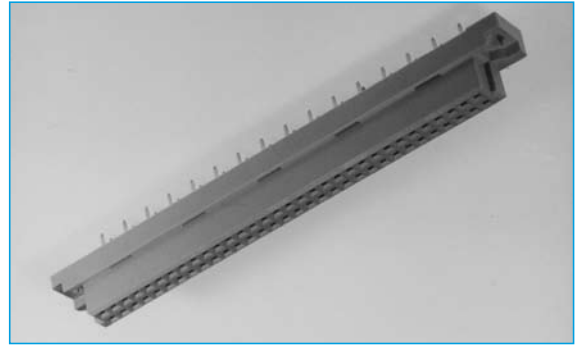

### SPECIFICATION

#### Material

**Insulator:** Glass filled polyester (PBT, UL flammability 94V-0)

**Contacts:** Female copper alloy, male brass

**Contact finish:** Contact area: Gold over nickel (per requirements of performance class 3, class 2)  
Termination area: Tin - plated or Gold-plated for long wrap post

#### Mechanical

**Insertion force:** 64 contacts max. 60N  
32 contacts max. 30N  
16 contacts max. 15N  
Withdrawal force per contact: min 0.15N

**Temperature range:** -55°C to +125°C  
Air and creepage distance 1.2mm min.

#### Electrical

**Current rating:** 20°C 2A  
70°C 1A  
100°C 0.5A

**Contact resistance:** ≤20mΩ (testing current 100mA)  
≤40mΩ after 400 mating cycles

**Capacitance between adjacent contacts:** Appr. 2pF

**Insulation resistance:** ≥10<sup>12</sup>Ω  
(between adjacent contacts at 100 VDC)


**Test voltage:** 1,000Vrms between contacts (2.54mm spacing)  
1,550Vrms between contacts (5.08mm spacing)  
1,550Vrms between contacts and body

**Operating voltage:** 250V AC

**Agency approval**  
U/L Electric rating: 250V, 2A  
Mating Cycles: Class 2 = 400 Class 3 = 50

SECTION 10

### OUTLINE DRAWING

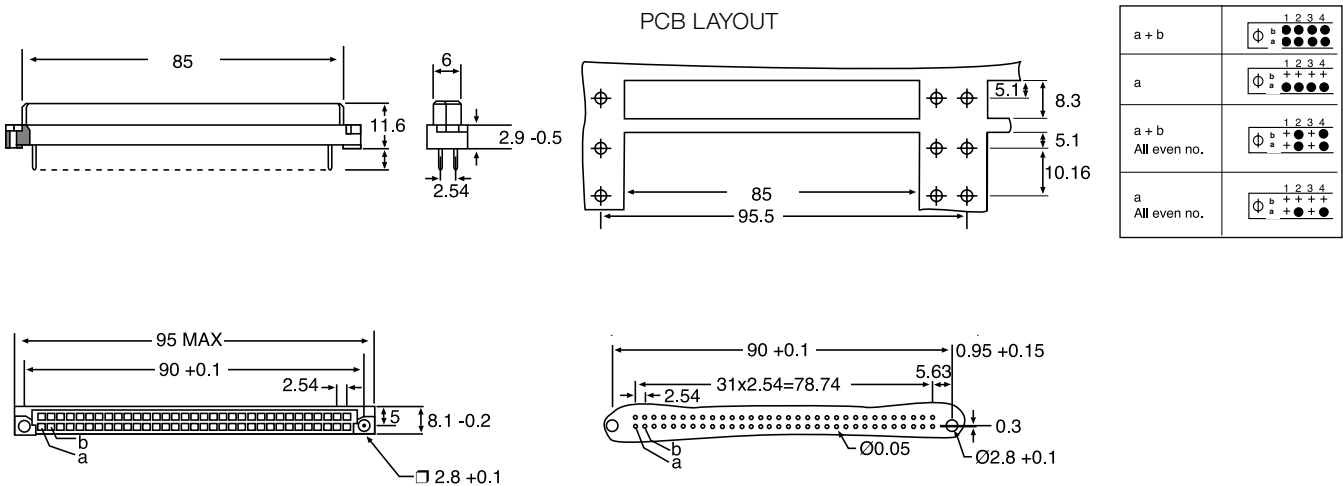

### ORDERING INFORMATION

DBC	DIN	F	16	B	A1	S	3
Dubilier Connectors	Series DIN 41612	Connector Type F = Female	N° of Ways 16 = 16 ways 32 = 32ways 64 = 64 ways	Housing Style B = B	Position of Contacts A = A row AB = A+B rows A1 = A even n°. AB1=AB even n°.	Termination Style S = Straight Solder Tail length options available on request	Quality Class 3 = class 3 2 = class 2