

# MUR805, MUR810, MUR815, MUR820, MUR840, MUR860

## Power Rectifiers

This series is designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

### Features

- Ultrafast 25, 50 and 75 Nanosecond Recovery Time
- 175°C Operating Junction Temperature
- Popular TO-220 Package
- Epoxy Meets UL 94 V-0 @ 0.125 in
- Low Forward Voltage
- Low Leakage Current
- High Temperature Glass Passivated Junction
- Reverse Voltage to 600 Volts
- Pb-Free Packages are Available\*

### Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 1.9 grams (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped 50 units per plastic tube





**KERSEMI**

<http://kersemi.com>


### ULTRAFAST RECTIFIERS

**8.0 AMPERES**

**50-600 VOLTS**



### MARKING DIAGRAM



A	= Assembly Location
Y	= Year
WW	= Work Week
U8	= Device Code
xx	= 10, 15, 20, 40 or 60
KA	= Location Code

# MUR805, MUR810, MUR815, MUR820, MUR840, MUR860

Rating	Symbol	MUR						Unit
		805	810	815	820	840	860	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	50	100	150	200	400	600	V
Average Rectified Forward Current Total Device, (Rated $V_R$ ), $T_C = 150^\circ\text{C}$	$I_{F(AV)}$	8.0						A
Peak Repetitive Forward Current (Rated $V_R$ , Square Wave, 20 kHz), $T_C = 150^\circ\text{C}$	$I_{FM}$	16						A
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	$I_{FSM}$	100						A
Operating Junction Temperature and Storage Temperature Range	$T_J, T_{stg}$	-65 to +175						$^\circ\text{C}$

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

## THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	3.0	2.0	$^\circ\text{C/W}$
--	-----------------	-----	-----	--------------------

## ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (Note 1) ( $i_F = 8.0$ Amps, $T_C = 150^\circ\text{C}$ ) ( $i_F = 8.0$ Amps, $T_C = 25^\circ\text{C}$ )	$v_F$	0.895 0.975	1.00 1.30	1.20 1.50	V
Maximum Instantaneous Reverse Current (Note 1) (Rated dc Voltage, $T_J = 150^\circ\text{C}$ ) (Rated dc Voltage, $T_J = 25^\circ\text{C}$ )	$i_R$	250 5.0	500 10	500 10	$\mu\text{A}$
Maximum Reverse Recovery Time ( $i_F = 1.0$ Amp, $di/dt = 50$ Amps/ $\mu\text{s}$ ) ( $i_F = 0.5$ Amp, $i_R = 1.0$ Amp, $I_{REC} = 0.25$ Amp)	$t_{rr}$	35 25	60 50	60 50	ns

1. Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

## ORDERING INFORMATION

Device	Package	Shipping <sup>†</sup>
MUR805	TO-220	50 Units / Rail
MUR810	TO-220	50 Units / Rail
MUR815	TO-220	50 Units / Rail
MUR815G	TO-220 (Pb-Free)	50 Units / Rail
MUR820	TO-220	50 Units / Rail
MUR820G	TO-220 (Pb-Free)	50 Units / Rail
MUR840	TO-220	50 Units / Rail
MUR840G	TO-220 (Pb-Free)	50 Units / Rail
MUR860	TO-220	50 Units / Rail
MUR860G	TO-220 (Pb-Free)	50 Units / Rail

Packaging

# MUR805, MUR810, MUR815, MUR820, MUR840, MUR860

## MUR805, MUR810, MUR815, MUR820, MUR840, MUR860

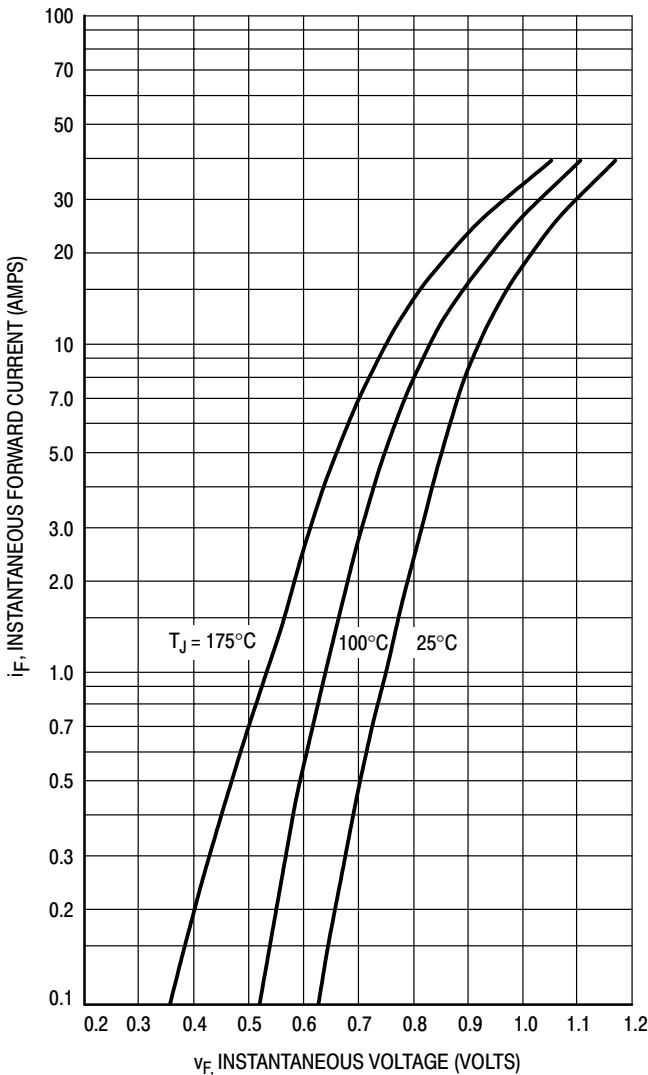


Figure 1. Typical Forward Voltage

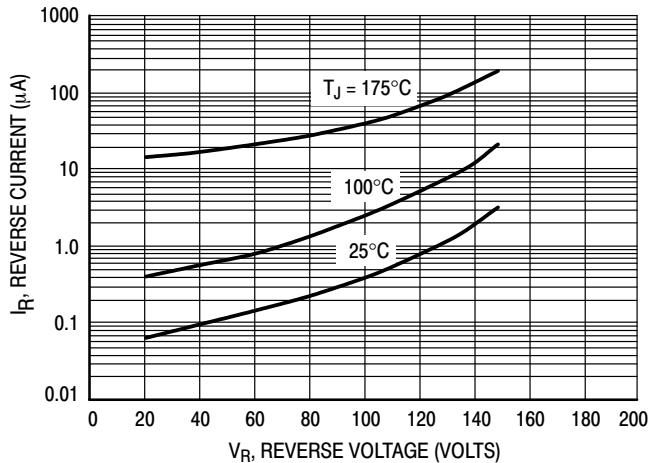


Figure 2. Typical Reverse Current\*

\* The curves shown are typical for the highest voltage device in the grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if  $V_R$  is sufficiently below rated  $V_R$ .

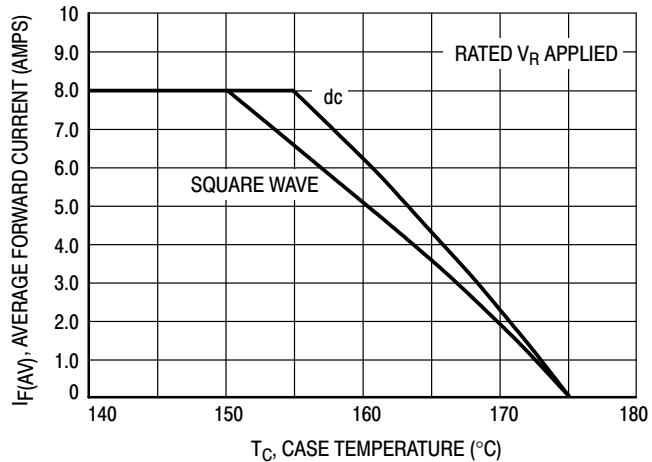


Figure 3. Current Derating, Case

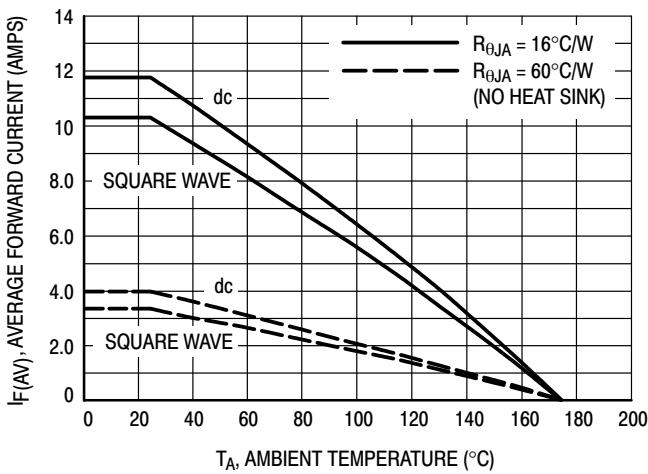


Figure 4. Current Derating, Ambient


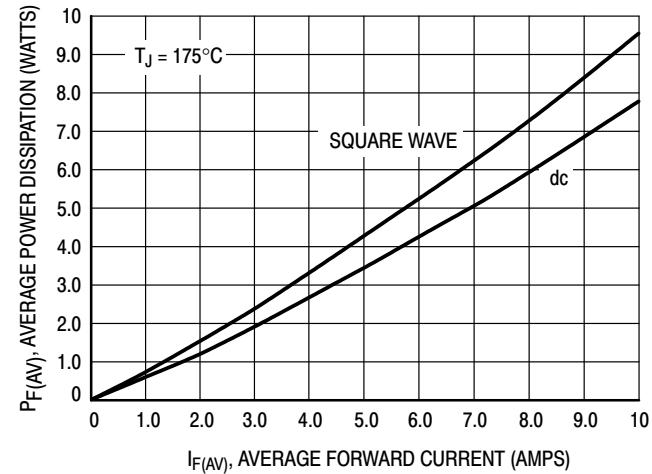



Figure 5. Power Dissipation

# MUR805, MUR810, MUR815, MUR820, MUR840, MUR860

## MUR840

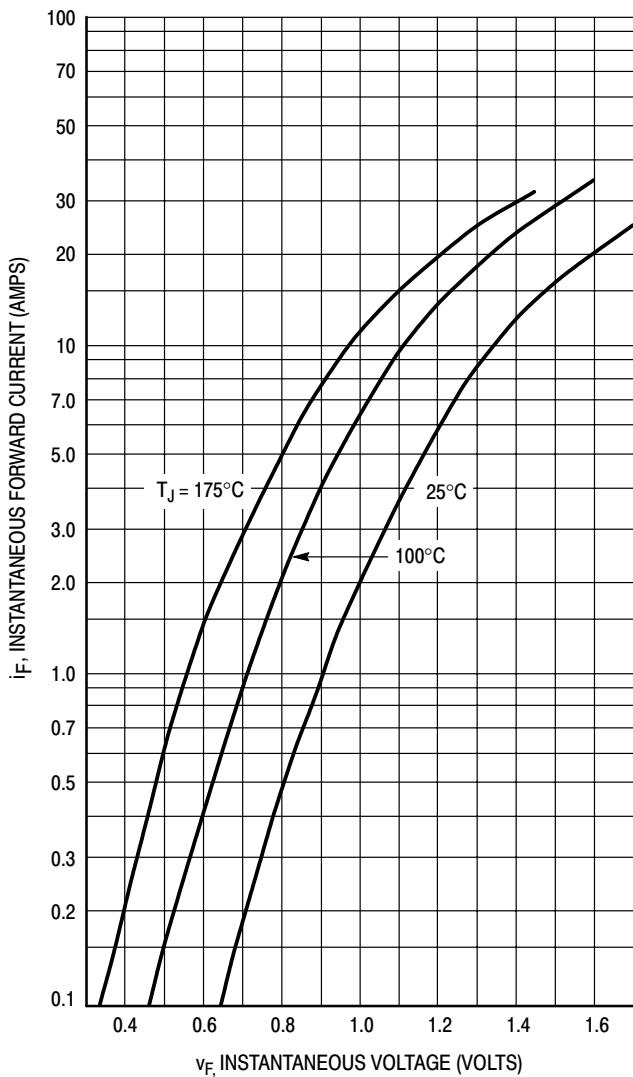


**Figure 6. Typical Forward Voltage**

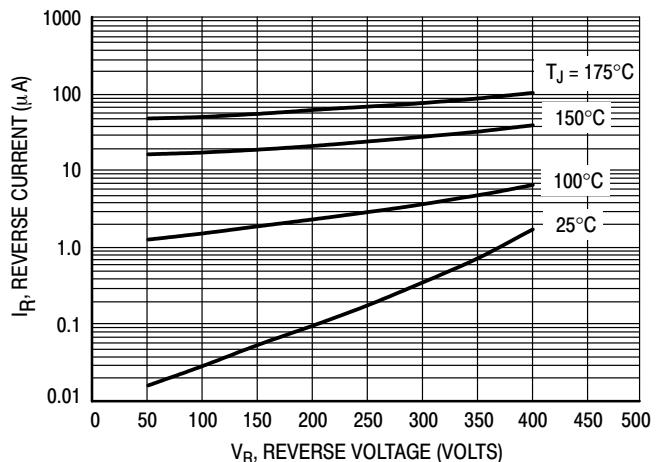


**Figure 7. Typical Reverse Current\***


\* The curves shown are typical for the highest voltage device in the grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if  $V_R$  is sufficiently below rated  $V_R$ .

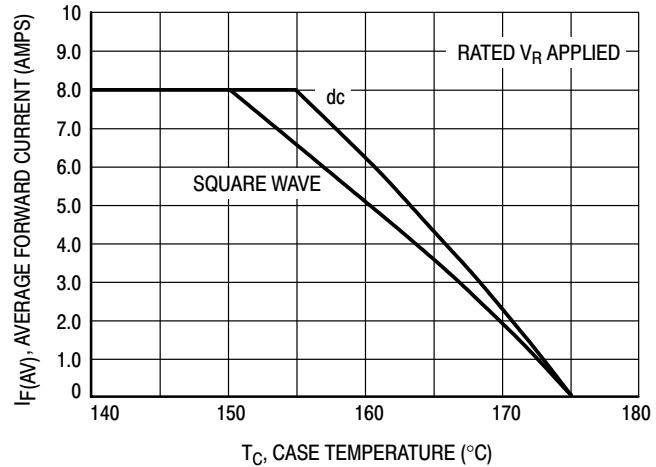

**Figure 8. Current Derating, Case**

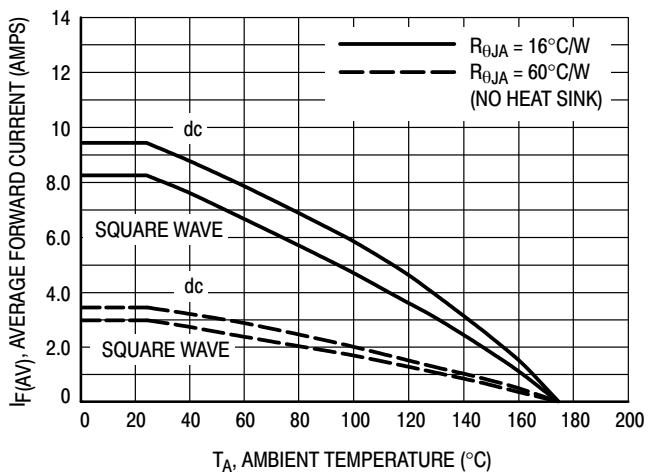

**Figure 9. Current Derating, Ambient**

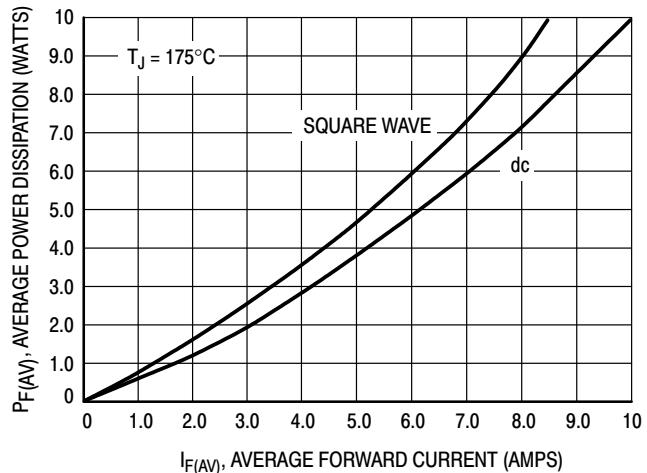

**Figure 10. Power Dissipation**

# MUR805, MUR810, MUR815, MUR820, MUR840, MUR860

## MUR860

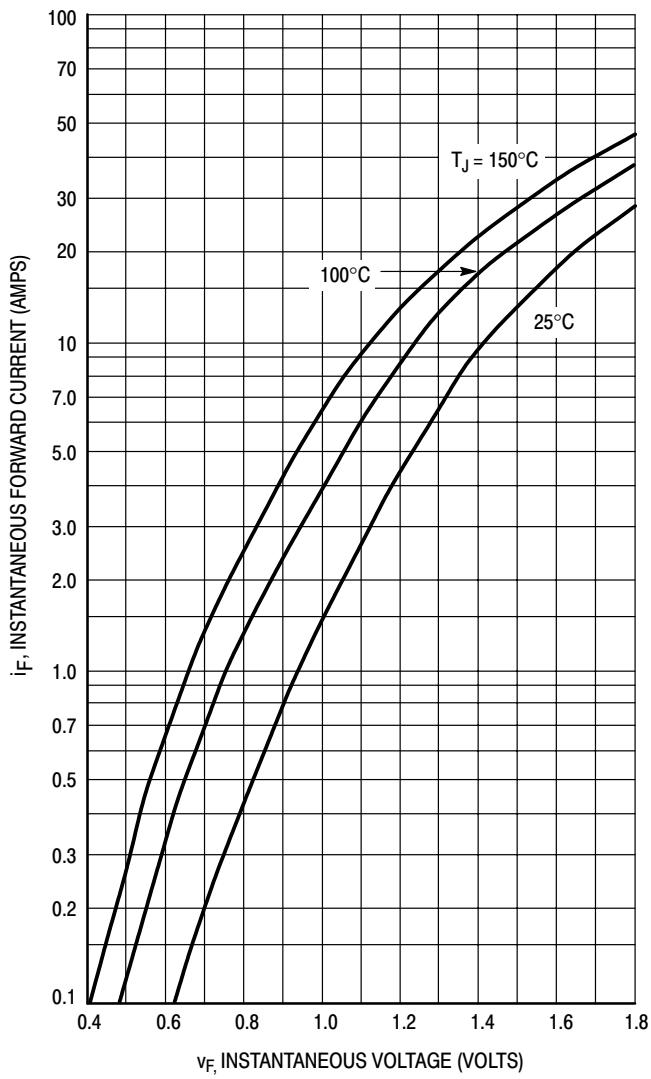


Figure 11. Typical Forward Voltage

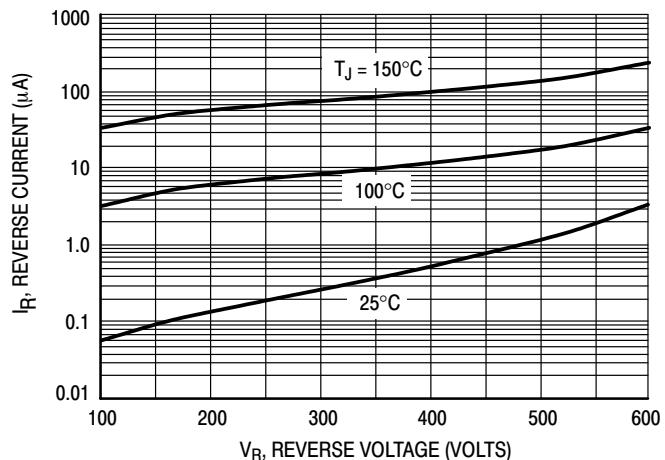


Figure 12. Typical Reverse Current\*

\* The curves shown are typical for the highest voltage device in the grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if  $V_R$  is sufficiently below rated  $V_R$ .

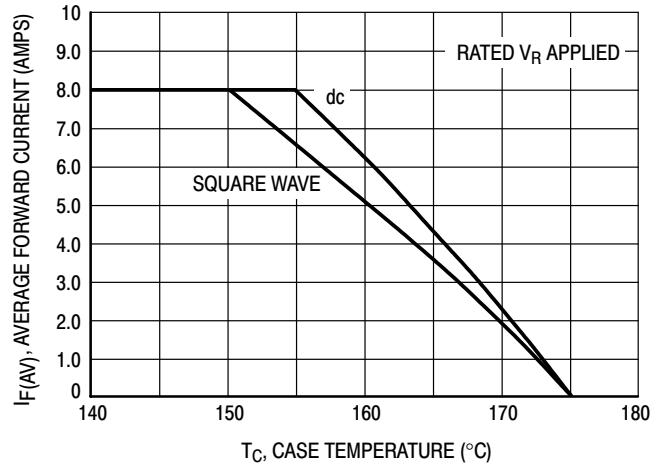


Figure 13. Current Derating, Case

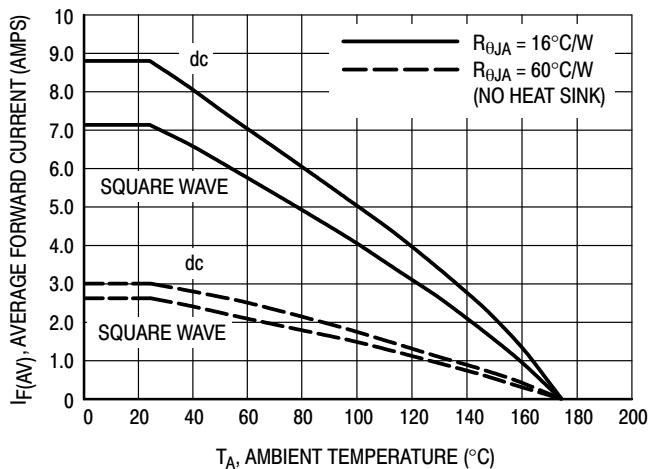


Figure 14. Current Derating, Ambient

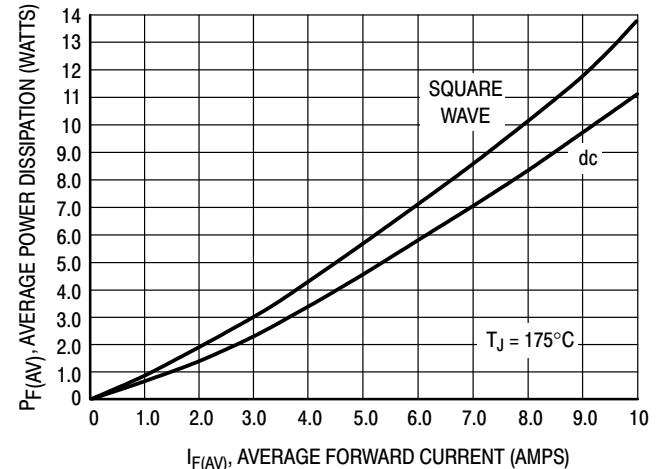


Figure 15. Power Dissipation

## MUR805, MUR810, MUR815, MUR820, MUR840, MUR860

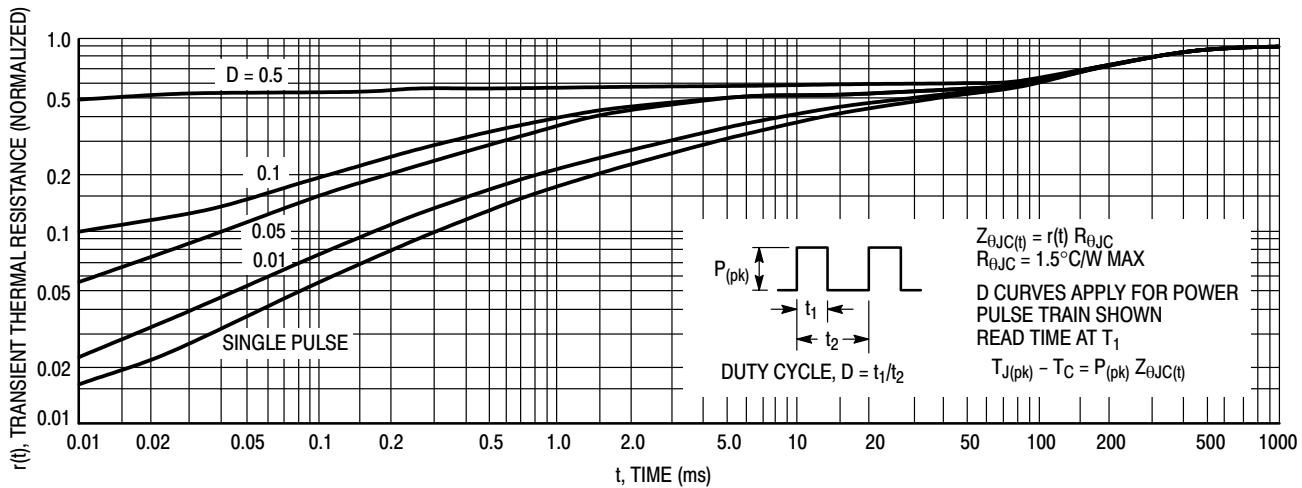


Figure 16. Thermal Response



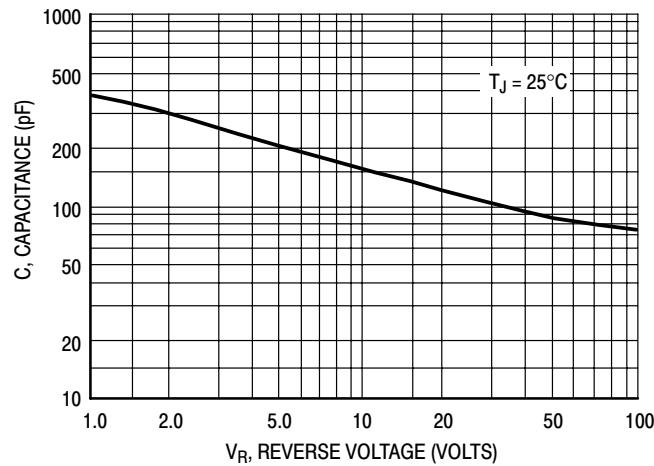


Figure 17. Typical Capacitance

# MUR805, MUR810, MUR815, MUR820, MUR840, MUR860

## PACKAGE DIMENSIONS

### TO-220 TWO-LEAD CASE 221B-04 ISSUE D

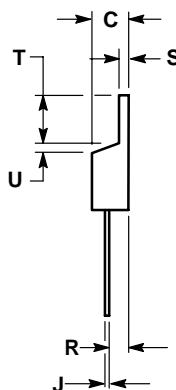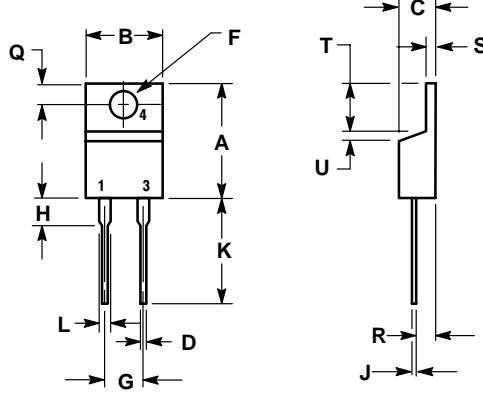

#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.595	0.620	15.11	15.75
B	0.380	0.405	9.65	10.29
C	0.160	0.190	4.06	4.82
D	0.025	0.035	0.64	0.89
F	0.142	0.147	3.61	3.73
G	0.190	0.210	4.83	5.33
H	0.110	0.130	2.79	3.30
J	0.018	0.025	0.46	0.64
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.14	1.52
Q	0.100	0.120	2.54	3.04
R	0.080	0.110	2.04	2.79
S	0.045	0.055	1.14	1.39
T	0.235	0.255	5.97	6.48
U	0.000	0.050	0.000	1.27