

## LOW DROP FIXED AND ADJUSTABLE POSITIVE VOLTAGE REGULATOR

The KIA1117AS/AF × × is a Low Drop Voltage Regulator able to provide up to 1A of output current, available even in adjustable version ( $V_{ref}=1.25V$ )

### FEATURES

- Low Dropout Voltage : 1.1V/Typ. ( $I_{out}=1.0A$ )
- Very Low Quiescent Current : 2.5mA/Typ.
- Output Current up to 1A
- Fixed Output Voltage of 1.5V, 1.8V, 2.5V, 2.85V, 3.3V, 5.0V
- Adjustable Version Availability :  $V_{ref}=1.25V$
- Internal Current and Thermal Limit
- A Minimum of  $10\mu F$  for stability
- Available in  $\pm 2\%$ (at 25 °C)
- High Ripple Rejection : 80dB/Typ
- Temperature Range : -30 °C ~ 125 °C

### LINE UP



| ITEM           | OUTPUT VOLTAGE (V)   | PACKAGE                   |
|----------------|----------------------|---------------------------|
| KIA1117AS/AF00 | Adjustable (1.25~8V) | AS : SOT-223<br>AF : DPAK |
| KIA1117AS/AF15 | 1.5                  |                           |
| KIA1117AS/AF18 | 1.8                  |                           |
| KIA1117AS/AF25 | 2.5                  |                           |
| KIA1117AS/AF28 | 2.85                 |                           |
| KIA1117AS/AF33 | 3.3                  |                           |
| KIA1117AS/AF50 | 5.0                  |                           |

### MAXIMUM RATINGS ( $T_a=25\text{ }^\circ\text{C}$ )

| CHARACTERISTIC                             | SYMBOL    | RATING    | UNIT |
|--|-----------|-----------|------|
| Input Voltage                              | $V_{IN}$  | 10        | V    |
| Output Current                             | $I_{OUT}$ | 1.0       | A    |
| Power Dissipation 1<br>(No Heatsink)       | S (Note)  | 1.0       | W    |
|  | F         | 1.3       |      |
| Power Dissipation 2<br>(Infinite Heatsink) | S         | 8.3       | W    |
|  | F         | 13        |      |
| Operating Temperature                      | $T_{opr}$ | -30 ~ 125 | °C   |
| Storage Temperature                        | $T_{stg}$ | -55 ~ 150 | °C   |

Note) Package Mounted on FR-4 PCB  $36 \times 18 \times 1.5$  mm.

: mounting pad for the GND Lead min.  $6\text{cm}^2$

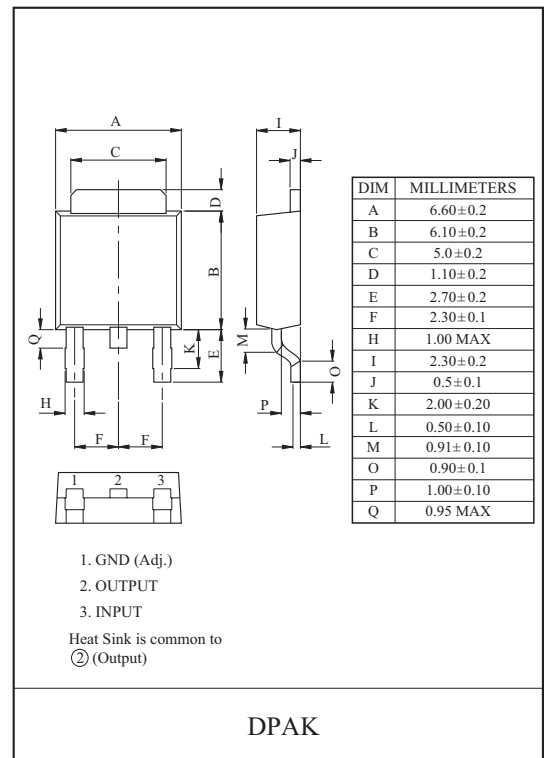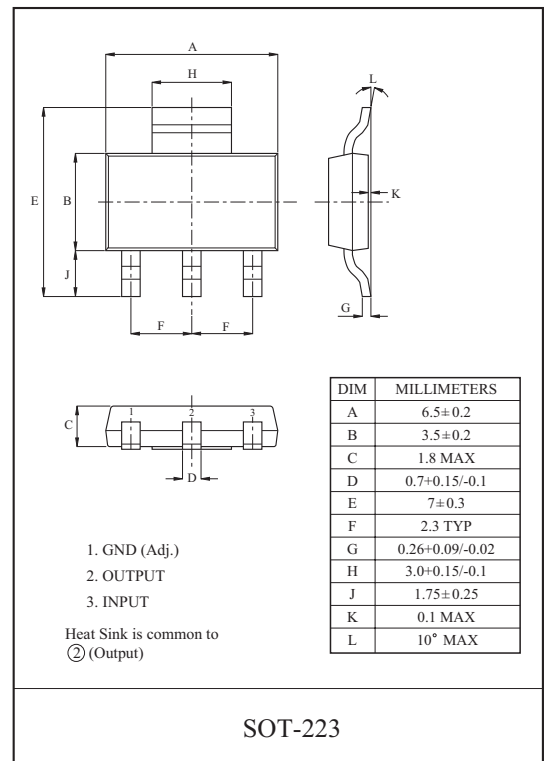

# KIA1117AS/AF00~KIA1117AS/AF50

Fig.1 Application Circuit-1 (Fixed-Type)

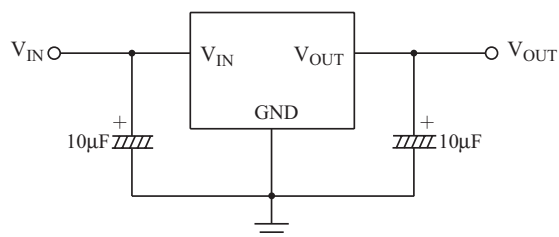


Fig.2 Application Circuit-2 (Adjustable-Type)


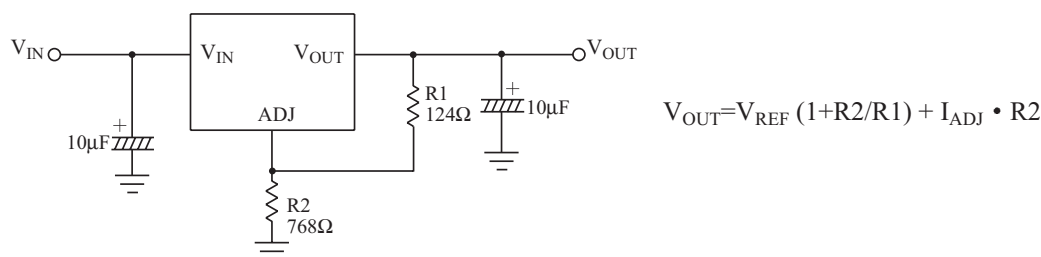


Fig.3 Application Circuit-3 (With MLCC)

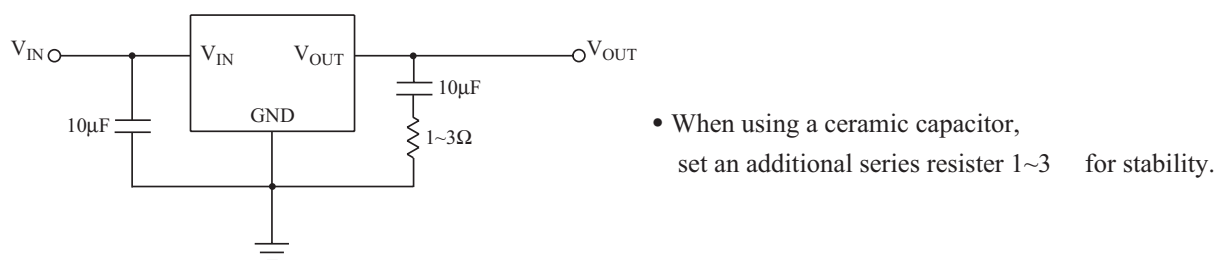

## ELECTRICAL CHARACTERISTICS

KIA1117AS/AF00 (Unless otherwise specified,  $T_j=25\text{ }^\circ\text{C}$ )

| CHARACTERISTIC             | SYMBOL      | TEST CONDITIONS   | MIN.                  | TYP.      | MAX.                  | UNIT                |
|----------------------------|-------------|---|-----------------------|-----------|-----------------------|---------------------|
| Output Voltage             | $V_{OUT1}$  | $V_{IN}=V_{OUT}+1.5\text{V}$ , $I_{OUT}=10\text{mA}$ , $T_j=25\text{ }^\circ\text{C}$                 | $V_{OUT} \times 0.98$ | $V_{OUT}$ | $V_{OUT} \times 1.02$ | V                   |
|                            | $V_{OUT2}$  | $10\text{mA} \leq I_{OUT} \leq 1\text{A}$ , $V_{OUT}+1.5\text{V} \leq V_{IN} \leq 10\text{V}$         | $V_{OUT} \times 0.97$ | $V_{OUT}$ | $V_{OUT} \times 1.03$ |                     |
| Line Regulation            | Reg Line    | $V_{OUT}+1.5\text{V} \leq V_{IN} \leq 10\text{V}$ , $I_{OUT}=10\text{mA}$                             | -                     | 1         | 10                    | mV                  |
| Load Regulation            | Reg Load    | $10\text{mA} \leq I_{OUT} \leq 1\text{A}$ , $V_{IN}=V_{OUT}+2.0\text{V}$                              | -                     | 0.5       | 1                     | %                   |
| Quiescent Current          | $I_{B1}$    | $V_{IN}=V_{OUT}+1.25\text{V}$ , $I_{OUT}=0\text{A}$   | -                     | 2.5       | 5                     | mA                  |
|                            | $I_{B2}$    | $V_{IN}=10\text{V}$ , $I_{OUT}=0\text{A}$   | -                     | 2.5       | 5                     |                     |
| Adjustable Pin Current     | $I_{ADJ}$   | $V_{IN}=V_{OUT}+1.5\text{V}$  | -                     | 35        | -                     | $\mu\text{A}$       |
| Minimum Load Current       | $I_{MIN}$   | $V_{IN}=V_{OUT}+1.5\text{V}$  | 10                    | -         | -                     | mA                  |
| Output Noise Voltage       | $V_{NO}$    | $V_{IN}=V_{OUT}+1.25\text{V}$ , $I_{OUT}=40\text{mA}$ ,<br>$10\text{Hz} \leq f \leq 10\text{kHz}$     | -                     | 100       | -                     | $\mu\text{V}_{rms}$ |
| Sort Circuit Current Limit | $I_{SC}$    | $V_{IN}=V_{OUT}+2.0\text{V}$  | 1.1                   | -         | -                     | A                   |
| Ripple Rejection           | $R \cdot R$ | $I_{OUT}=40\text{mA}$ , $f=120\text{Hz}$ , $V_{ripple}=1\text{V}_{p-p}$<br>$V_{IN}=V_{OUT}+3\text{V}$ | 60                    | 80        | -                     | dB                  |
| Dropout Voltage            | $V_D$       | $I_{OUT}=1\text{A}$ , $V_{IN}=0.95V_{OUT}$  | -                     | 1.1       | 1.4                   | V                   |
| Temperature Stability      | $TCV_O$     | $V_{IN}=V_{OUT}+1.5\text{V}$ , $I_{OUT}=10\text{mA}$ , $T_j=-30\sim 125\text{ }^\circ\text{C}$        | -                     | 0.5       | -                     | %                   |

# KIA1117AS/AF00~KIA1117AS/AF50

## ELECTRICAL CHARACTERISTICS

KIA1117AS/AF15 (Unless otherwise specified, T<sub>j</sub>=25 °C)

| CHARACTERISTIC             | SYMBOL            | TEST CONDITIONS  | MIN.                    | TYP.             | MAX.                    | UNIT              |
|----------------------------|-------------------|--|-------------------------|------------------|-------------------------|-------------------|
| Output Voltage             | V <sub>OUT1</sub> | V <sub>IN</sub> =V <sub>OUT</sub> +1.5V, I <sub>OUT</sub> =10mA, T <sub>j</sub> =25 °C               | V <sub>OUT</sub> × 0.98 | V <sub>OUT</sub> | V <sub>OUT</sub> × 1.02 | V                 |
|                            | V <sub>OUT2</sub> | 10mA ≤ I <sub>OUT</sub> ≤ 1A, V <sub>OUT</sub> +1.5V ≤ V <sub>IN</sub> ≤ 10V                         | V <sub>OUT</sub> × 0.97 | V <sub>OUT</sub> | V <sub>OUT</sub> × 1.03 |                   |
| Line Regulation            | Reg Line          | V <sub>OUT</sub> +1.5V ≤ V <sub>IN</sub> ≤ 10V, I <sub>OUT</sub> =10mA                               | -                       | 1                | 10                      | mV                |
| Load Regulation            | Reg Load          | 10mA ≤ I <sub>OUT</sub> ≤ 1A, V <sub>IN</sub> =V <sub>OUT</sub> +2.0V                                | -                       | 0.5              | 1                       | %                 |
| Quiescent Current          | I <sub>B1</sub>   | V <sub>IN</sub> =V <sub>OUT</sub> +1.25V, I <sub>OUT</sub> =0A                                       | -                       | 2.5              | 5                       | mA                |
|                            | I <sub>B2</sub>   | V <sub>IN</sub> =10V, I <sub>OUT</sub> =0A   | -                       | 2.5              | 5                       |                   |
| Output Noise Voltage       | V <sub>NO</sub>   | V <sub>IN</sub> =V <sub>OUT</sub> +1.25V, I <sub>OUT</sub> =40mA,<br>10Hz ≤ f ≤ 10kHz                | -                       | 100              | -                       | μV <sub>rms</sub> |
| Sort Circuit Current Limit | I <sub>SC</sub>   | V <sub>IN</sub> =V <sub>OUT</sub> +2.0V  | 1.1                     | -                | -                       | A                 |
| Ripple Rejection           | R · R             | I <sub>OUT</sub> =40mA, f=120Hz, V <sub>ripple</sub> =1Vp-p<br>V <sub>IN</sub> =V <sub>OUT</sub> +3V | 60                      | 80               | -                       | dB                |
| Dropout Voltage            | V <sub>D</sub>    | I <sub>OUT</sub> =1A, V <sub>IN</sub> =0.95V <sub>OUT</sub>  | -                       | 1.1              | 1.4                     | V                 |
| Temperature Stability      | TCV <sub>O</sub>  | V <sub>IN</sub> =V <sub>OUT</sub> +1.5V, I <sub>OUT</sub> =10mA, T <sub>j</sub> =-30~125 °C          | -                       | 0.5              | -                       | %                 |

## ELECTRICAL CHARACTERISTICS

KIA1117AS/AF18 (Unless otherwise specified, T<sub>j</sub>=25 °C)

| CHARACTERISTIC             | SYMBOL            | TEST CONDITIONS  | MIN.                    | TYP.             | MAX.                    | UNIT              |
|----------------------------|-------------------|--|-------------------------|------------------|-------------------------|-------------------|
| Output Voltage             | V <sub>OUT1</sub> | V <sub>IN</sub> =V <sub>OUT</sub> +1.5V, I <sub>OUT</sub> =10mA, T <sub>j</sub> =25 °C               | V <sub>OUT</sub> × 0.98 | V <sub>OUT</sub> | V <sub>OUT</sub> × 1.02 | V                 |
|                            | V <sub>OUT2</sub> | 10mA ≤ I <sub>OUT</sub> ≤ 1A, V <sub>OUT</sub> +1.5V ≤ V <sub>IN</sub> ≤ 10V                         | V <sub>OUT</sub> × 0.97 | V <sub>OUT</sub> | V <sub>OUT</sub> × 1.03 |                   |
| Line Regulation            | Reg Line          | V <sub>OUT</sub> +1.5V ≤ V <sub>IN</sub> ≤ 10V, I <sub>OUT</sub> =10mA                               | -                       | 1                | 10                      | mV                |
| Load Regulation            | Reg Load          | 10mA ≤ I <sub>OUT</sub> ≤ 1A, V <sub>IN</sub> =V <sub>OUT</sub> +2.0V                                | -                       | 0.5              | 1                       | %                 |
| Quiescent Current          | I <sub>B1</sub>   | V <sub>IN</sub> =V <sub>OUT</sub> +1.25V, I <sub>OUT</sub> =0A                                       | -                       | 2.5              | 5                       | mA                |
|                            | I <sub>B2</sub>   | V <sub>IN</sub> =10V, I <sub>OUT</sub> =0A   | -                       | 2.5              | 5                       |                   |
| Output Noise Voltage       | V <sub>NO</sub>   | V <sub>IN</sub> =V <sub>OUT</sub> +1.25V, I <sub>OUT</sub> =40mA,<br>10Hz ≤ f ≤ 10kHz                | -                       | 100              | -                       | μV <sub>rms</sub> |
| Sort Circuit Current Limit | I <sub>SC</sub>   | V <sub>IN</sub> =V <sub>OUT</sub> +2.0V  | 1.1                     | -                | -                       | A                 |
| Ripple Rejection           | R · R             | I <sub>OUT</sub> =40mA, f=120Hz, V <sub>ripple</sub> =1Vp-p<br>V <sub>IN</sub> =V <sub>OUT</sub> +3V | 60                      | 80               | -                       | dB                |
| Dropout Voltage            | V <sub>D</sub>    | I <sub>OUT</sub> =1A, V <sub>IN</sub> =0.95V <sub>OUT</sub>  | -                       | 1.1              | 1.4                     | V                 |
| Temperature Stability      | TCV <sub>O</sub>  | V <sub>IN</sub> =V <sub>OUT</sub> +1.5V, I <sub>OUT</sub> =10mA, T <sub>j</sub> =-30~125 °C          | -                       | 0.5              | -                       | %                 |

# KIA1117AS/AF00~KIA1117AS/AF50

## ELECTRICAL CHARACTERISTICS

KIA1117AS/AF25 (Unless otherwise specified,  $T_j=25\text{ }^\circ\text{C}$ )

| CHARACTERISTIC             | SYMBOL     | TEST CONDITIONS  | MIN.                  | TYP.      | MAX.                  | UNIT          |
|----------------------------|------------|--|-----------------------|-----------|-----------------------|---------------|
| Output Voltage             | $V_{OUT1}$ | $V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$ , $T_j=25\text{ }^\circ\text{C}$          | $V_{OUT} \times 0.98$ | $V_{OUT}$ | $V_{OUT} \times 1.02$ | V             |
|                            | $V_{OUT2}$ | $10mA \leq I_{OUT} \leq 1A$ , $V_{OUT}+1.5V \leq V_{IN} \leq 10V$                | $V_{OUT} \times 0.97$ | $V_{OUT}$ | $V_{OUT} \times 1.03$ |               |
| Line Regulation            | Reg Line   | $V_{OUT}+1.5V \leq V_{IN} \leq 10V$ , $I_{OUT}=10mA$                             | -                     | 1         | 10                    | mV            |
| Load Regulation            | Reg Load   | $10mA \leq I_{OUT} \leq 1A$ , $V_{IN}=V_{OUT}+2.0V$                              | -                     | 0.5       | 1                     | %             |
| Quiescent Current          | $I_{B1}$   | $V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=0A$  | -                     | 2.5       | 5                     | mA            |
|                            | $I_{B2}$   | $V_{IN}=10V$ , $I_{OUT}=0A$  | -                     | 2.5       | 5                     |               |
| Output Noise Voltage       | $V_{NO}$   | $V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=40mA$ ,<br>$10Hz \leq f \leq 10kHz$            | -                     | 100       | -                     | $\mu V_{rms}$ |
| Sort Circuit Current Limit | $I_{SC}$   | $V_{IN}=V_{OUT}+2.0V$  | 1.1                   | -         | -                     | A             |
| Ripple Rejection           | R · R      | $I_{OUT}=40mA$ , $f=120Hz$ , $V_{ripple}=1Vp-p$<br>$V_{IN}=V_{OUT}+3V$           | 60                    | 80        | -                     | dB            |
| Dropout Voltage            | $V_D$      | $I_{OUT}=1A$ , $V_{IN}=0.95V_{OUT}$  | -                     | 1.1       | 1.4                   | V             |
| Temperature Stability      | $TCV_O$    | $V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$ , $T_j=-30\sim 125\text{ }^\circ\text{C}$ | -                     | 0.5       | -                     | %             |

## ELECTRICAL CHARACTERISTICS

KIA1117AS/AF28 (Unless otherwise specified,  $T_j=25\text{ }^\circ\text{C}$ )

| CHARACTERISTIC             | SYMBOL     | TEST CONDITIONS  | MIN.                  | TYP.      | MAX.                  | UNIT          |
|----------------------------|------------|--|-----------------------|-----------|-----------------------|---------------|
| Output Voltage             | $V_{OUT1}$ | $V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$ , $T_j=25\text{ }^\circ\text{C}$          | $V_{OUT} \times 0.98$ | $V_{OUT}$ | $V_{OUT} \times 1.02$ | V             |
|                            | $V_{OUT2}$ | $10mA \leq I_{OUT} \leq 1A$ , $V_{OUT}+1.5V \leq V_{IN} \leq 10V$                | $V_{OUT} \times 0.97$ | $V_{OUT}$ | $V_{OUT} \times 1.03$ |               |
| Line Regulation            | Reg Line   | $V_{OUT}+1.5V \leq V_{IN} \leq 10V$ , $I_{OUT}=10mA$                             | -                     | 1         | 10                    | mV            |
| Load Regulation            | Reg Load   | $10mA \leq I_{OUT} \leq 1A$ , $V_{IN}=V_{OUT}+2.0V$                              | -                     | 0.5       | 1                     | %             |
| Quiescent Current          | $I_{B1}$   | $V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=0A$  | -                     | 2.5       | 5                     | mA            |
|                            | $I_{B2}$   | $V_{IN}=10V$ , $I_{OUT}=0A$  | -                     | 2.5       | 5                     |               |
| Output Noise Voltage       | $V_{NO}$   | $V_{IN}=V_{OUT}+1.25V$ , $I_{OUT}=40mA$ ,<br>$10Hz \leq f \leq 10kHz$            | -                     | 100       | -                     | $\mu V_{rms}$ |
| Sort Circuit Current Limit | $I_{SC}$   | $V_{IN}=V_{OUT}+2.0V$  | 1.1                   | -         | -                     | A             |
| Ripple Rejection           | R · R      | $I_{OUT}=40mA$ , $f=120Hz$ , $V_{ripple}=1Vp-p$<br>$V_{IN}=V_{OUT}+3V$           | 60                    | 80        | -                     | dB            |
| Dropout Voltage            | $V_D$      | $I_{OUT}=1A$ , $V_{IN}=0.95V_{OUT}$  | -                     | 1.1       | 1.4                   | V             |
| Temperature Stability      | $TCV_O$    | $V_{IN}=V_{OUT}+1.5V$ , $I_{OUT}=10mA$ , $T_j=-30\sim 125\text{ }^\circ\text{C}$ | -                     | 0.5       | -                     | %             |

# KIA1117AS/AF00~KIA1117AS/AF50

## ELECTRICAL CHARACTERISTICS

KIA1117AS/AF33 (Unless otherwise specified, T<sub>j</sub>=25 °C)

| CHARACTERISTIC             | SYMBOL            | TEST CONDITIONS  | MIN.                    | TYP.             | MAX.                    | UNIT              |
|----------------------------|-------------------|--|-------------------------|------------------|-------------------------|-------------------|
| Output Voltage             | V <sub>OUT1</sub> | V <sub>IN</sub> =V <sub>OUT</sub> +1.5V, I <sub>OUT</sub> =10mA, T <sub>j</sub> =25 °C               | V <sub>OUT</sub> × 0.98 | V <sub>OUT</sub> | V <sub>OUT</sub> × 1.02 | V                 |
|                            | V <sub>OUT2</sub> | 10mA ≤ I <sub>OUT</sub> ≤ 1A, V <sub>OUT</sub> +1.5V ≤ V <sub>IN</sub> ≤ 10V                         | V <sub>OUT</sub> × 0.97 | V <sub>OUT</sub> | V <sub>OUT</sub> × 1.03 |                   |
| Line Regulation            | Reg Line          | V <sub>OUT</sub> +1.5V ≤ V <sub>IN</sub> ≤ 10V, I <sub>OUT</sub> =10mA                               | -                       | 1                | 10                      | mV                |
| Load Regulation            | Reg Load          | 10mA ≤ I <sub>OUT</sub> ≤ 1A, V <sub>IN</sub> =V <sub>OUT</sub> +2.0V                                | -                       | 0.5              | 1                       | %                 |
| Quiescent Current          | I <sub>B1</sub>   | V <sub>IN</sub> =V <sub>OUT</sub> +1.25V, I <sub>OUT</sub> =0A                                       | -                       | 2.5              | 5                       | mA                |
|                            | I <sub>B2</sub>   | V <sub>IN</sub> =10V, I <sub>OUT</sub> =0A   | -                       | 2.5              | 5                       |                   |
| Output Noise Voltage       | V <sub>NO</sub>   | V <sub>IN</sub> =V <sub>OUT</sub> +1.25V, I <sub>OUT</sub> =40mA,<br>10Hz ≤ f ≤ 10kHz                | -                       | 100              | -                       | μV <sub>rms</sub> |
| Sort Circuit Current Limit | I <sub>SC</sub>   | V <sub>IN</sub> =V <sub>OUT</sub> +2.0V  | 1.1                     | -                | -                       | A                 |
| Ripple Rejection           | R · R             | I <sub>OUT</sub> =40mA, f=120Hz, V <sub>ripple</sub> =1Vp-p<br>V <sub>IN</sub> =V <sub>OUT</sub> +3V | 60                      | 80               | -                       | dB                |
| Dropout Voltage            | V <sub>D</sub>    | I <sub>OUT</sub> =1A, V <sub>IN</sub> =0.95V <sub>OUT</sub>  | -                       | 1.1              | 1.4                     | V                 |
| Temperature Stability      | TCV <sub>O</sub>  | V <sub>IN</sub> =V <sub>OUT</sub> +1.5V, I <sub>OUT</sub> =10mA, T <sub>j</sub> =-30~125 °C          | -                       | 0.5              | -                       | %                 |

## ELECTRICAL CHARACTERISTICS

KIA1117AS/AF50 (Unless otherwise specified, T<sub>j</sub>=25 °C)

| CHARACTERISTIC             | SYMBOL            | TEST CONDITIONS  | MIN.                    | TYP.             | MAX.                    | UNIT              |
|----------------------------|-------------------|--|-------------------------|------------------|-------------------------|-------------------|
| Output Voltage             | V <sub>OUT1</sub> | V <sub>IN</sub> =V <sub>OUT</sub> +1.5V, I <sub>OUT</sub> =10mA, T <sub>j</sub> =25 °C               | V <sub>OUT</sub> × 0.98 | V <sub>OUT</sub> | V <sub>OUT</sub> × 1.02 | V                 |
|                            | V <sub>OUT2</sub> | 10mA ≤ I <sub>OUT</sub> ≤ 1A, V <sub>OUT</sub> +1.5V ≤ V <sub>IN</sub> ≤ 10V                         | V <sub>OUT</sub> × 0.97 | V <sub>OUT</sub> | V <sub>OUT</sub> × 1.03 |                   |
| Line Regulation            | Reg Line          | V <sub>OUT</sub> +1.5V ≤ V <sub>IN</sub> ≤ 10V, I <sub>OUT</sub> =10mA                               | -                       | 1                | 10                      | mV                |
| Load Regulation            | Reg Load          | 10mA ≤ I <sub>OUT</sub> ≤ 1A, V <sub>IN</sub> =V <sub>OUT</sub> +2.0V                                | -                       | 0.5              | 1                       | %                 |
| Quiescent Current          | I <sub>B1</sub>   | V <sub>IN</sub> =V <sub>OUT</sub> +1.25V, I <sub>OUT</sub> =0A                                       | -                       | 2.5              | 5                       | mA                |
|                            | I <sub>B2</sub>   | V <sub>IN</sub> =10V, I <sub>OUT</sub> =0A   | -                       | 2.5              | 5                       |                   |
| Output Noise Voltage       | V <sub>NO</sub>   | V <sub>IN</sub> =V <sub>OUT</sub> +1.25V, I <sub>OUT</sub> =40mA,<br>10Hz ≤ f ≤ 10kHz                | -                       | 100              | -                       | μV <sub>rms</sub> |
| Sort Circuit Current Limit | I <sub>SC</sub>   | V <sub>IN</sub> =V <sub>OUT</sub> +2.0V  | 1.1                     | -                | -                       | A                 |
| Ripple Rejection           | R · R             | I <sub>OUT</sub> =40mA, f=120Hz, V <sub>ripple</sub> =1Vp-p<br>V <sub>IN</sub> =V <sub>OUT</sub> +3V | 60                      | 80               | -                       | dB                |
| Dropout Voltage            | V <sub>D</sub>    | I <sub>OUT</sub> =1A, V <sub>IN</sub> =0.95V <sub>OUT</sub>  | -                       | 1.1              | 1.4                     | V                 |
| Temperature Stability      | TCV <sub>O</sub>  | V <sub>IN</sub> =V <sub>OUT</sub> +1.5V, I <sub>OUT</sub> =10mA, T <sub>j</sub> =-30~125 °C          | -                       | 0.5              | -                       | %                 |

# KIA1117AS/AF00~KIA1117AS/AF50

Fig. 3  $V_D - I_{OUT}$

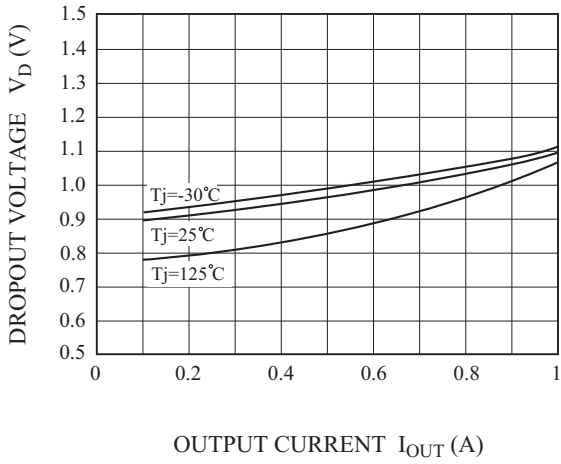


Fig. 4  $V_{OUT}(\text{CHANGE}) - T_j$

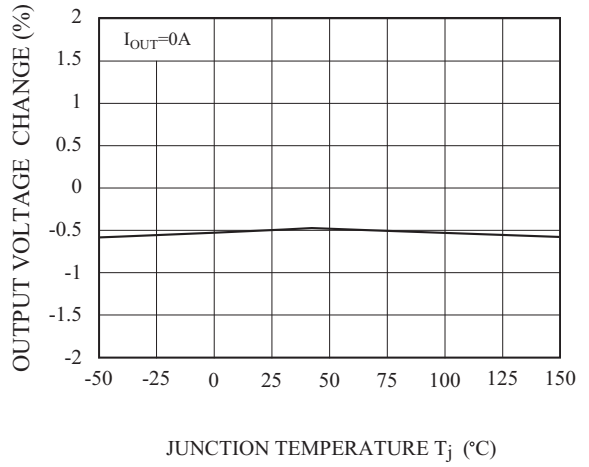


Fig. 5 LINE REGULATION

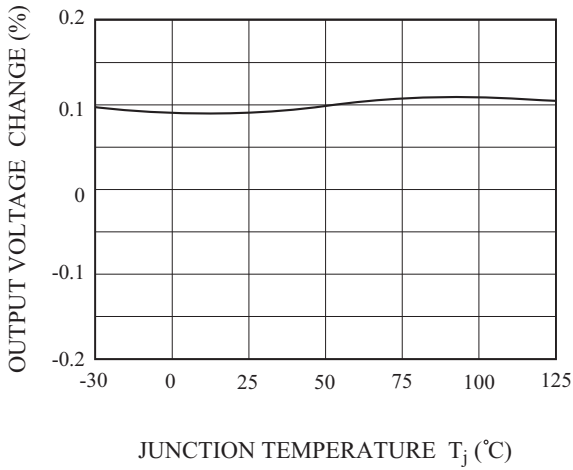


Fig. 6 LOAD REGULATION

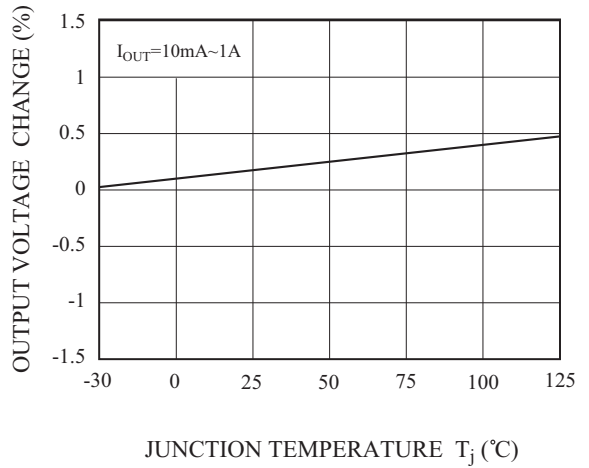


Fig.7  $I_Q - T_j$


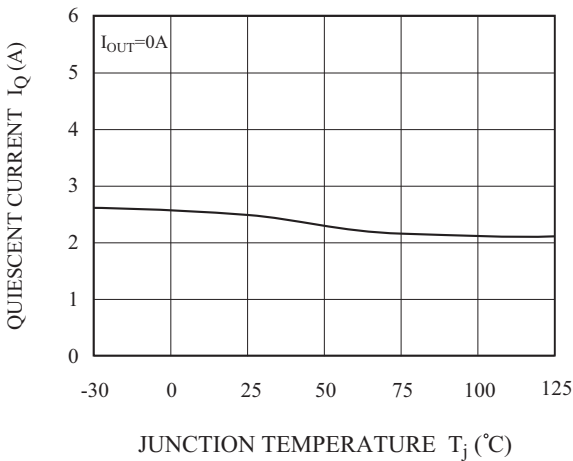


Fig.8 R.R - f

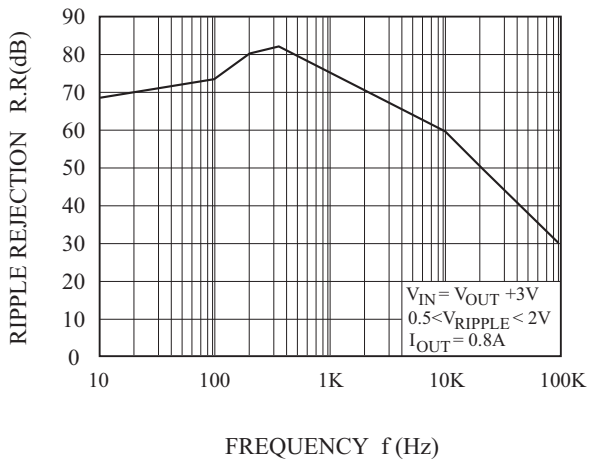

# KIA1117AS/AF00~KIA1117AS/AF50

Fig.9  $P_D$  -  $T_a$  (AS-Type : SOT-223)

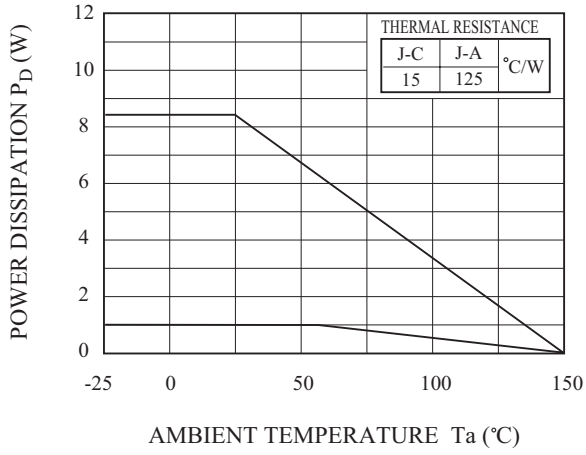


Fig.9  $P_D$  -  $T_a$  (AF-Type : DPAK)

