



REV.	DESCRIPTION	DATE
A	NEW DRAWING	9/8/2008



TOLERANCE:
±0.3mm
UNLESS OTHERWISE SPECIFIED

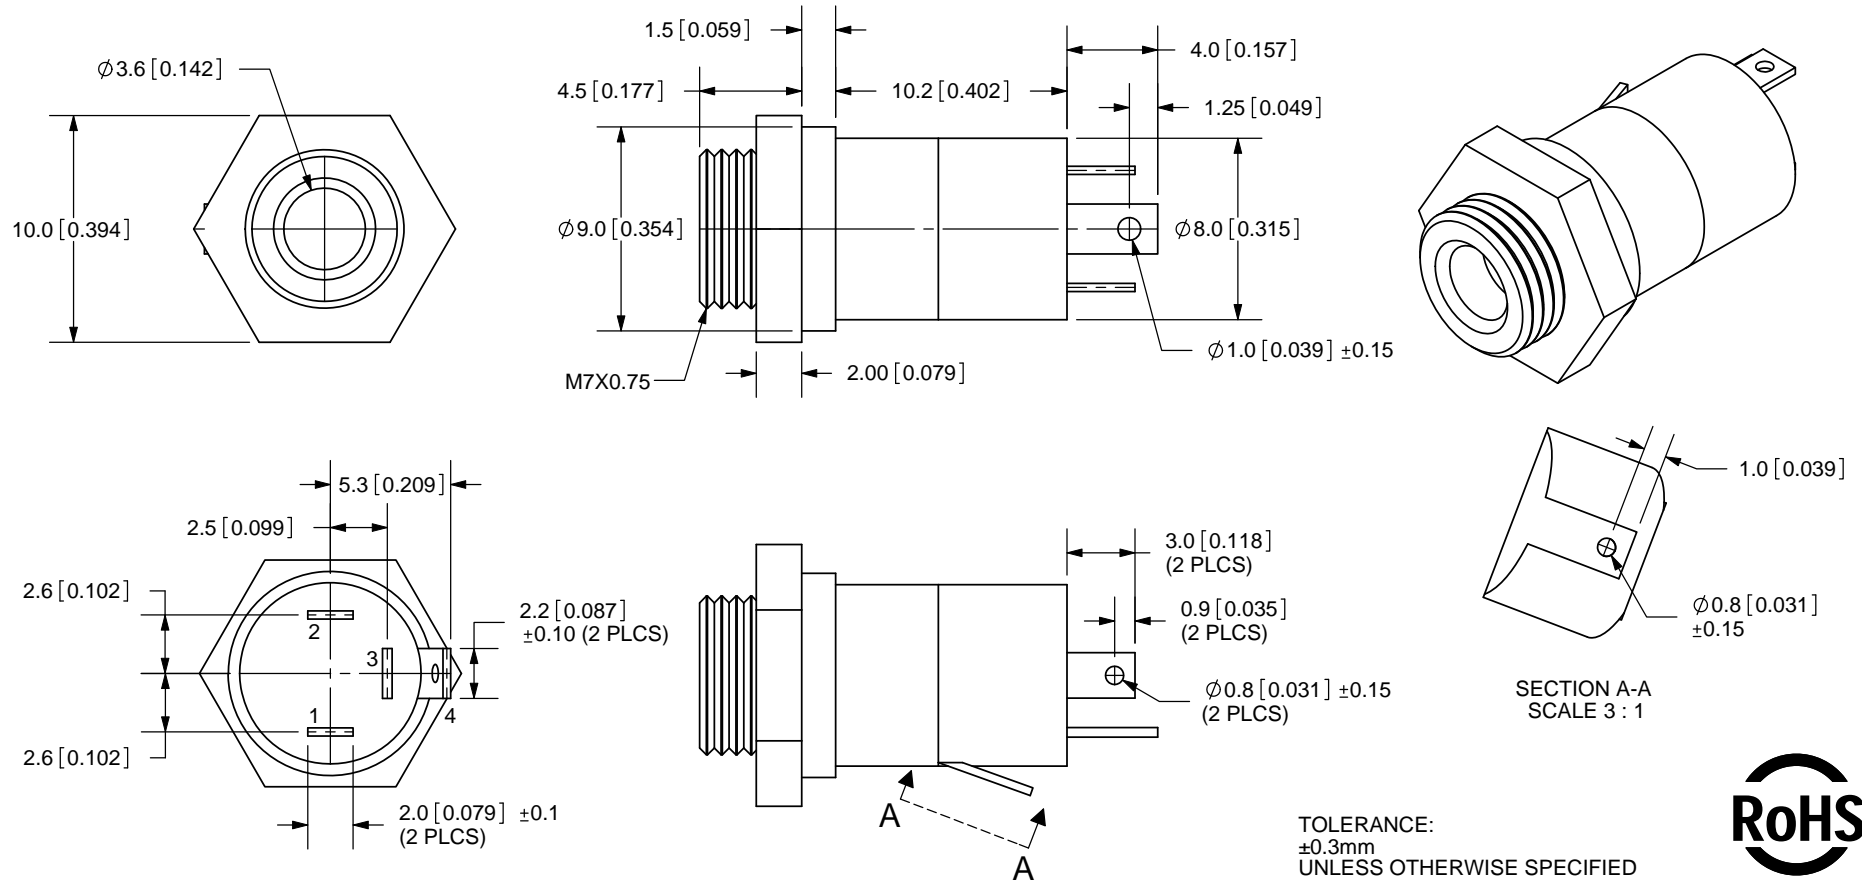

SPECIFICATIONS:
 RATING: 34V DC or 34V AC@ 1A
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
 LIFE: 5,000 CYCLES

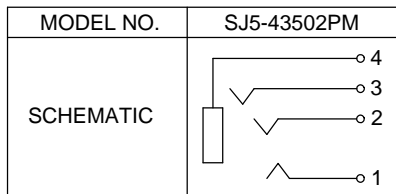

	MATERIAL	PLATING
HEX NUT	Steel	Nickel
TERMINAL 1	Copper Alloy	Gold
TERMINAL 2	Copper Alloy	Nickel
TERMINAL 3	Copper Alloy	Nickel
TERMINAL 4	Copper Alloy	Nickel
SHELL	Brass	Nickel
HOUSING	PBT	

20050 SW 112th Ave.
Tualatin, OR 97062
Phone: 503-612-2300
800-275-4899
Fax: 503-612-2383
Website: www.cui.com

TITLE: 3.5mm Panel Mount Audio Jack - 4 Connector		REV: A
PART NO. SJ5-43502PM		UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:	SCALE: 3:1

PC FILE NAME:
SJ5-43502PM

COPYRIGHT 2008 BY CUI INC.