



XO-53000 Series





1. Specification				
Type:	XO-53500	XO-53330	XO-53250	XO-53180
Supply Voltage V_s :	+5.0 V \pm 5%	+3.3 V \pm 5%	+2.5 V \pm 5%	+1.8 V \pm 5%
Nominal frequency range:	12kHz ...125MHz	12kHz...160MHz	12kHz ... 160MHz	12kHz ... 125MHz
Frequency stability options: +25 ppm: +50 ppm: \pm 100 ppm:	XO-53501 XO-53502 XO-53503	XO-53331 XO-53332 XO-53333	XO-53251 XO-53252 XO-53253	XO-53181 XO-53182 XO-53183
Frequency stability is considered as the overall stability including nominal frequency tolerance at +25°C, frequency stability vs. temperature, vs. load changes (\pm 5%), vs. supply voltage changes (\pm 5%) and 1 st year aging.				
Temp. range Options -20 °C to +70 °C: -40 °C to +85 °C:	S E			
Tri-State Options:	F : Fixed Frequency without Tri-State T : Tri-State function			
Tri-State Function:	Logic High or NC: Output Enable Logic Low: Output Disable			
Current consumption (with 15 pF load):	\leq 10mA < 20MHz \leq 30mA < 50MHz \leq 40mA > 70MHz \leq 50mA < 125MHz	\leq 7mA < 20MHz \leq 20mA < 50MHz \leq 30mA < 100MHz \leq 40mA < 125MHz \leq 45mA < 160MHz	\leq 7mA < 20MHz \leq 15mA < 50MHz \leq 20mA < 70MHz \leq 30mA < 125MHz \leq 35mA < 160MHz	\leq 5mA < 20MHz \leq 15mA < 50MHz \leq 20mA < 70MHz \leq 25mA < 125MHz
Output voltage : level : load : duty cycle:	HCMOS low < 10% V_s , high > 90% V_s 1 kOhm // 15 pF 45% / 55% for f < 100 MHz 40% / 60% for f > 100 MHz			
Phase jitter: (12 kHz to 20 MHz BW)	< 1 ps rms			
2. Environmental conditions				
According to KVG Product Qualification Procedure AA-QM-200				
3. Marking				
Manufacturer's name, date code (week/year); Specification; Center frequency				


				KVG Quartz Crystal Technology GmbH
				P.O.Box 61
				D-74924 Neckarbischofsheim
		22.04.10	M. Zupan	Tel. +49 (0) 7263 / 648-0
ED	Description	Date	Name	Fax. +49 (0) 7263 / 6196

4. Case

Case Style : 193-1.2A



Recommended soldering pattern



1.Pin configuration

1. Tri-State Control Input or N.C.
2. Ground (case)
3. RF Output
4. Supply Voltage V_s


				KVG Quartz Crystal Technology GmbH P.O.Box 61 D-74924 Neckarbischofsheim Tel. +49 (0) 7263 / 648-0 Fax. +49 (0) 7263 / 6196
		22.04.10	M. Zupan	
ED	Description	Date	Name	



XO-53000 Series



5. Reflow Soldering Profile

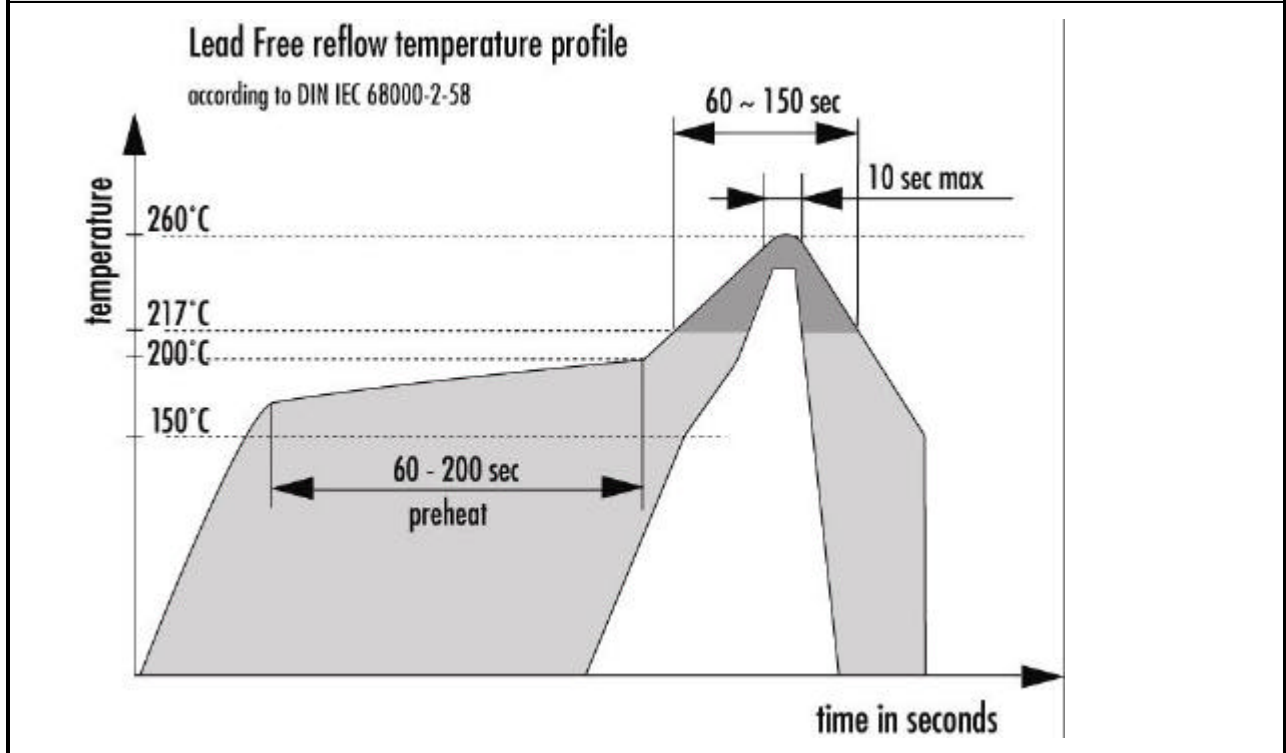

				KVG Quartz Crystal Technology GmbH
				P.O.Box 61
				D-74924 Neckarbischofsheim
		22.04.10	M. Zupan	Tel. +49 (0) 7263 / 648-0
ED	Description	Date	Name	Fax. +49 (0) 7263 / 6196