


81X0564-2 DWG. NO.	REV.	DESCRIPTION	S.O.	BY	DATE
-----------------------	------	-------------	------	----	------

CONFIDENTIALITY NOTICE
 Important: This information is Confidential Information of Group Arnold. By accepting receipt of this Confidential Information, the Recipient agrees not to disclose this Confidential Information to any other party and to use this Confidential Information only to produce parts for Group Arnold. The Recipient recognizes that release of this Confidential Information to any individual or entity not employed by or directly owned by the Recipient is strictly forbidden. The Recipient further recognizes that unauthorized use or disclosure of the Group Arnold Confidential Information would seriously harm the competitive position of Group Arnold and its affiliates, and would create serious commercial damage and legal liability for Group Arnold and other parties, and the Recipient will be held responsible for any such damage and liability.

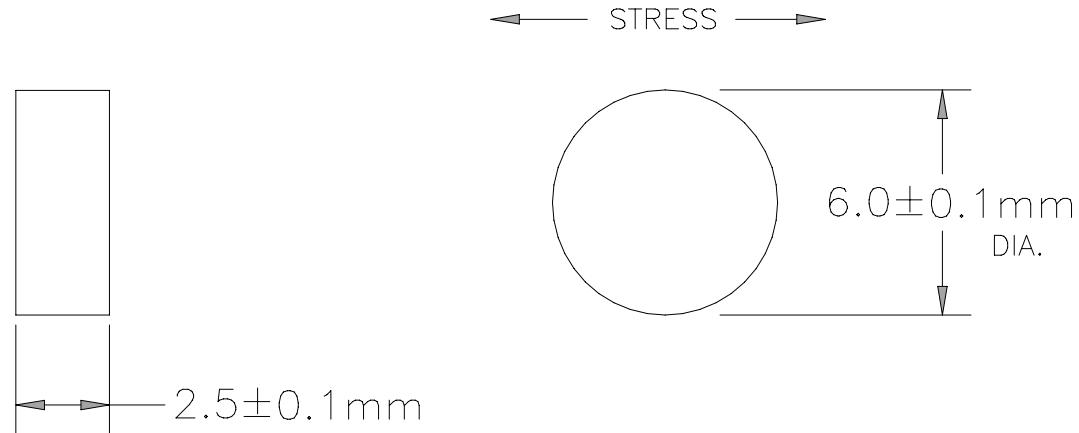

NOTES :

- MATERIAL – NEODYMIUM IRON-BORON NEO 35H
 MAGNETIC PROPERTIES :
 Br = 11,800 – 12,200 GAUSS
 Hc = 10,800 – 11,500 OERSTEDS
 Hci = >=17,000 OERSTEDS
 BHmax = 33 – 36 MGOe
- IMA STANDARDS APPLY
 UNLESS OTHERWISE SPECIFIED.
- FULLY MAGNETIZED THRU DIA.
- PLATE: Ni-Cu-Ni
 .0002-.001 INCH THICK
 ALL DIMENSIONS ARE AFTER PLATING.



5. SALT SPRAY TESTING REQUIRED
 12 HOURS MINIMUM.



ACCEPTANCE CLASS
 A - 5 - V

MATERIAL WEIGHT
 .0012 LBS.

CUSTOMER :		CUST. P/N :	
TOLERANCE UNLESS INDICATED DIMENSIONS ARE IN MILLIMETERS BRACKETS DENOTE INCHES THOUSANDTHS +/- .127 (.005) HUNDREDTHS +/- .51 (.02) ANGLES +/- 0.5 SPC CLASS (X)		DR. G.S.	03-28-06
		ORIG. M.M.	03-28-06
		CHK.	
TITLE : MAGNET		ENG. S.J.B.	03-28-06
		DWG. NO.	81X0564-2