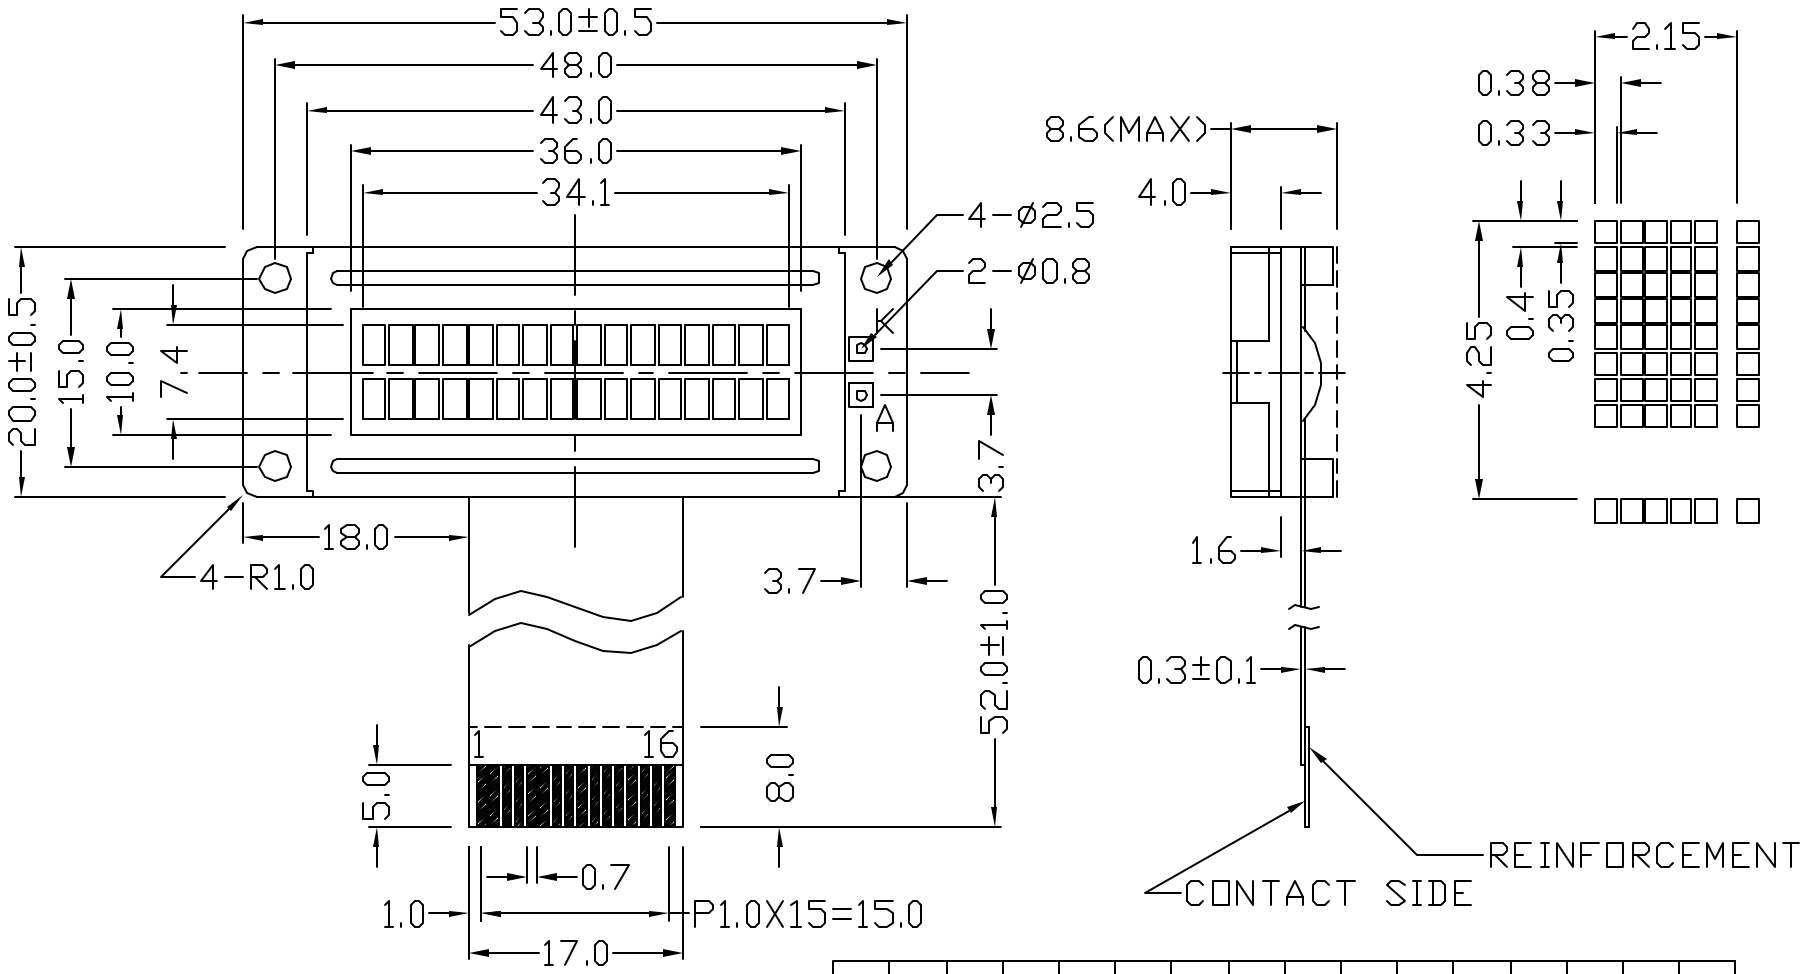

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vdd	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

NOTES:
1.DISPLAY TYPE: TN, STN, or FSTN
2.VIEWING DIRECTION: 6:00 or 12:00
3.POLARIZER MODE: REFLECTIVE or TRANSFLECTIVE
4.OPERATING TEMP: NORMAL or WIDE
5.STORAGE TEMP: NORMAL or WIDE
6.LCD OPERATING VOLTAGE: 4.2V
7.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
8.BACKLIGHT TYPE: NONE, LED, or EL
9.UNMARKED TOLERANCE: ±0.3mm
10.THERE IS AN ADHESIVE DOUBLE TAPE BETWEEN PCB AND CABLE

TIAN-MA MICROELECTRONICS CO.
6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM162X		
CHECKED BY:			SCALE:
APPROVED BY:	DWG NO: G-1		UNIT: mm
CONFIRMED BY:	DWG NAME: TM162XBC6G-1	SHEET NO:	OF