



PARA LIGHT ELECTRONICS CO., LTD.
4F, No.1, Lane 93, Chien Yi Road, Chung Ho City, Taipei, Taiwan
Tel: 886-2-2225-3733 Fax: 886-2-2225-4800
E-mail: para@para.com.tw <http://www.para.com.tw>

DATA SHEET

PART NO. : L-C155TBJRCT

REV : A / 0

CUSTOMER'S APPROVAL : _____ DCC : _____




3.2*2.7*1.1 mm SMD LED

L-C155TBJRCT

REV:A / 0

PACKAGE DIMENSIONS

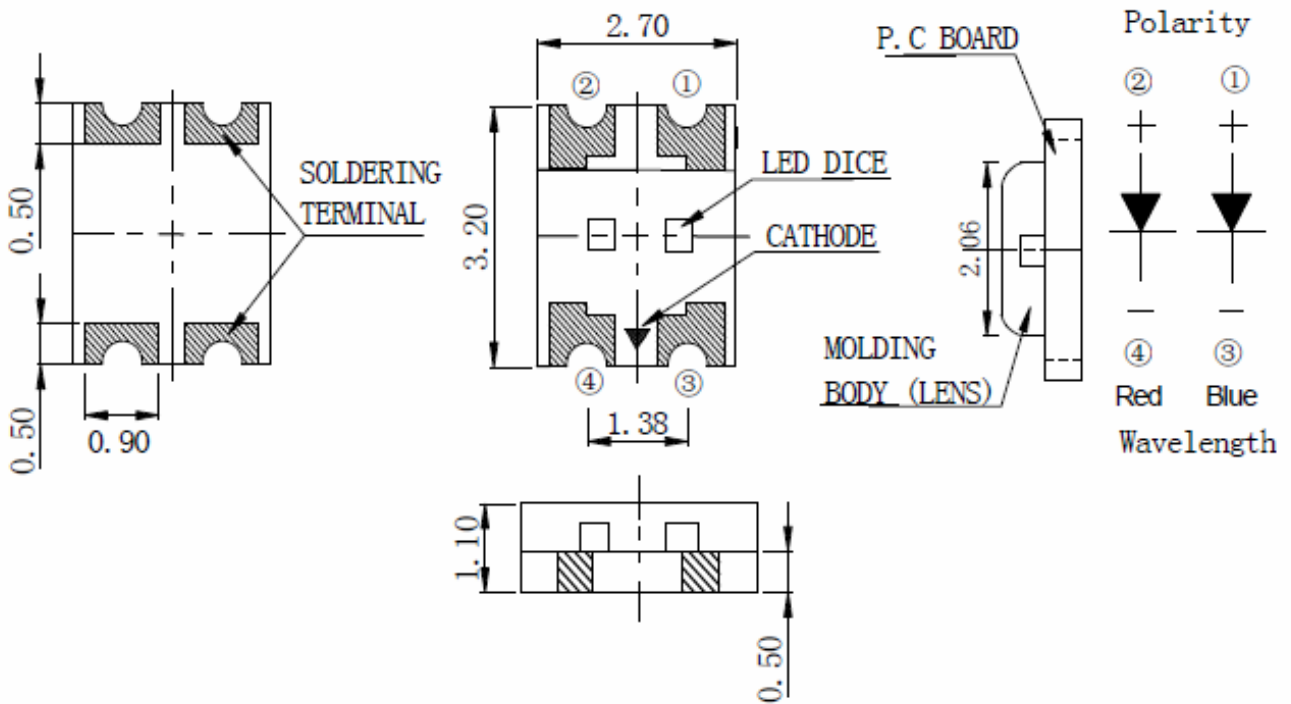

Note:

1. All Dimensions are in millimeters (inches)
2. Tolerance is $\pm 0.20\text{mm}$ (0.004 ") Unless otherwise specified.



3.2*2.7*1.1 mm SMD LED

L-C155TBJRCT

REV:A / 0

FEATURES

- * LOW POWER CONSUMPTION
- * I.C. COMPATIBLE
- * LONGLIFE SOLID STATE RELIABILITY

CHIP MATERIALS

- * Dice Material : InGaN / AlInGaP
- * Light Color : Blue & RED
- * Lens Color : WATER CLEAR

ABSOLUTE MAXIMUM RATING : (Ta = 25°C)

| SYMBOL | PARAMETER | RATING | | UNIT |
|--------|--|------------|----|------|
| | | B | R | |
| PD | Power Dissipation | 76 | 75 | mW |
| If | Forward Current | 20 | 30 | mA |
| Ifp | Peak Forward Current (1/10 duty cycle 0.1ms) | 100 | 80 | mA |
| VR | Reverse Voltage | 5 | | V |
| Topr | Operating Temperature Range | -55 ~ + 85 | | |
| Tstg | Storage Temperature Range | -55 ~ + 85 | | |

ELECTRO-OPTICAL CHARACTERISTICS : (Ta = 25°C)

| SYMBOL | PARAMETER | TEST CONDITION | VALUE | | | UNIT | |
|--------|--------------------------|----------------|-------|-------|------|-------|----|
| | | | MIN. | TYP. | MAX. | | |
| VF | Forward Voltage | IF = 20mA | B | 3.0 | 3.8 | V | |
| | | | R | 2.0 | 2.4 | | |
| IR | Reverse Current | VR = 5V | | | 100 | μA | |
| Δλ | Spectral Line Half-Width | IF = 20mA | B | 25 | | nm | |
| | | | R | 15 | | | |
| λp | Peak Emission Wavelength | IF = 20mA | B | 468 | | nm | |
| | | | R | 639 | | | |
| λD | Dominant Wavelength | IF = 20mA | B | 465 | 470 | 475 | nm |
| | | | R | 617.5 | 631 | 633.5 | |
| 2θ1/2 | Half Intensity Angle | IF = 20mA | | 130 | | deg | |
| Iv | Luminous Intensity | IF = 20mA | B | 28 | 90 | mcd | |
| | | | R | 18 | 72 | | |



3.2*2.7*1.1 mm SMD LED

L-C155TBJRCT

REV:A / 0

Typical Electro-Optical Characteristics Curves
(25 Ambient Temperature Unless Otherwise Noted)

Blue:

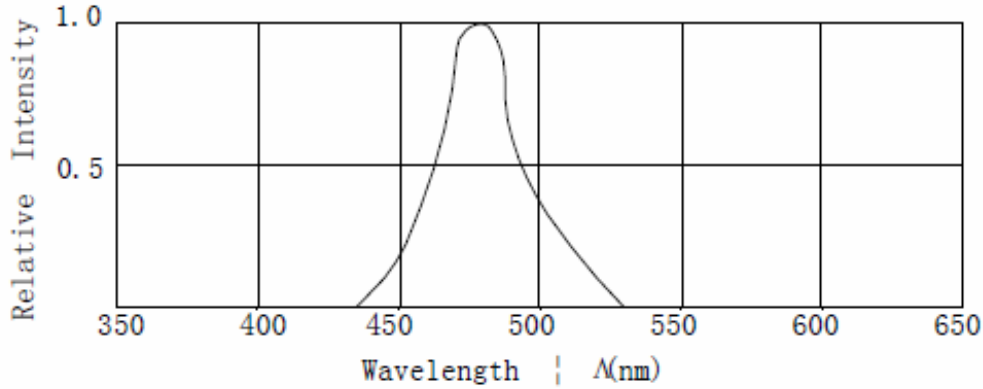


Fig.1 Relative Intensity VS. Wavelength

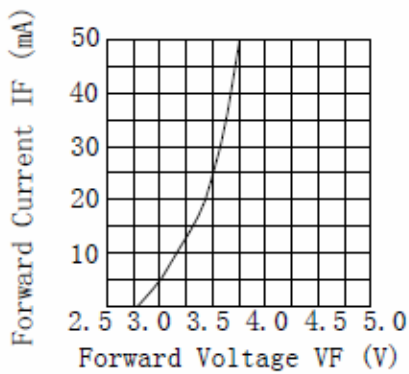


Fig.2 Forward Current vs. Forward Voltage

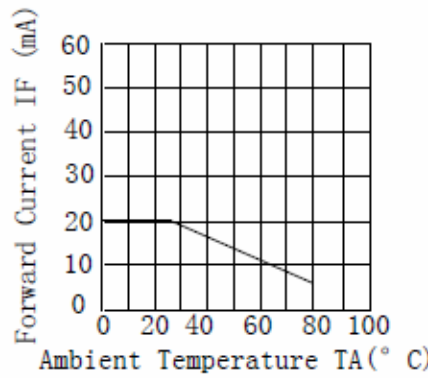


Fig.3 Forward Current Derating Curve

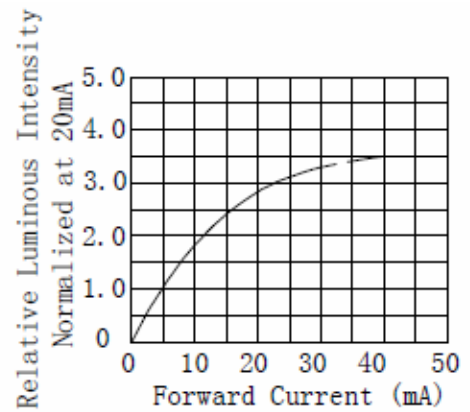


Fig.4 Relative Luminous Intensity vs. Forward Current

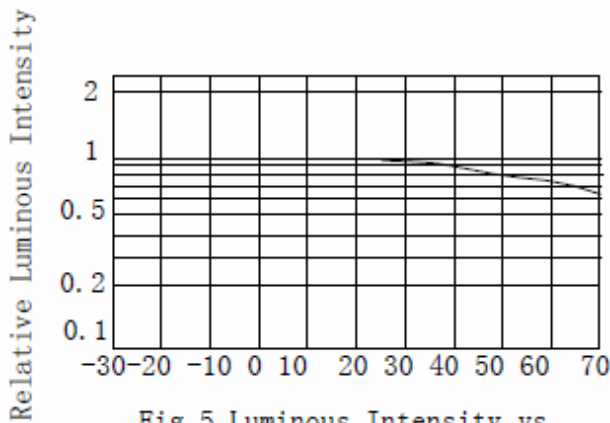


Fig.5 Luminous Intensity vs. Ambient Temperature

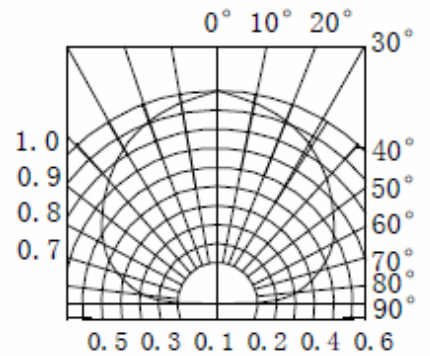


Fig.6 Spatial Distribution



3.2*2.7*1.1 mm SMD LED

L-C155TBJRCT

REV:A / 0

Typical Electro-Optical Characteristics Curves
(25 Ambient Temperature Unless Otherwise Noted)

Red:

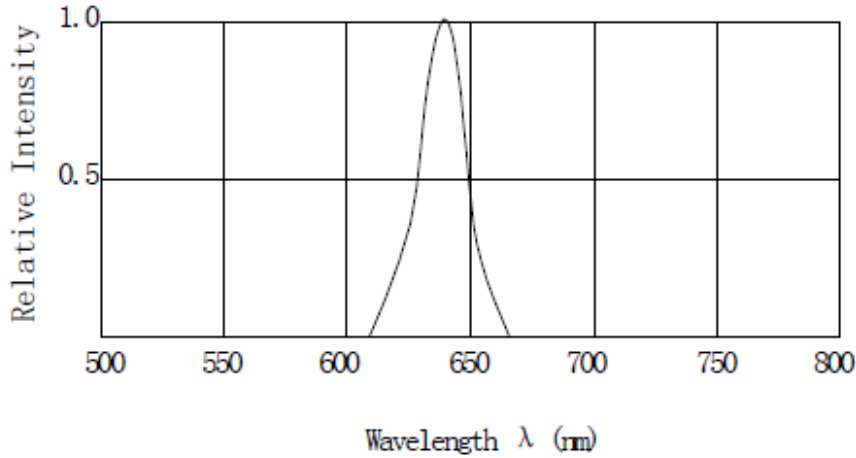


Fig. 1 Relative Intensity vs. Wavelength

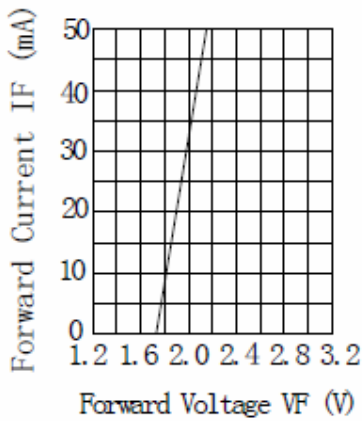


Fig. 2 Forward Current VS. Forward Voltage

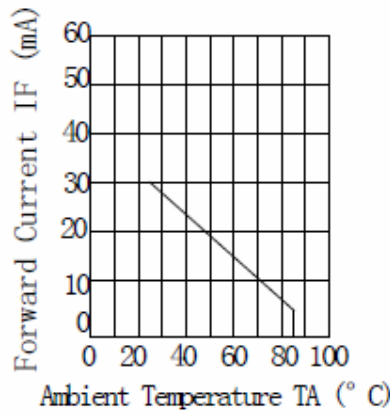


Fig. 3 Forward Current Derating Curve

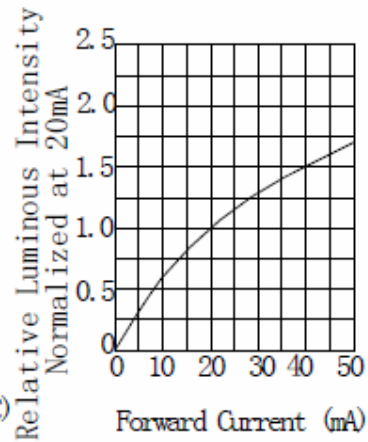


Fig. 4 Relative Luminous Intensity VS. Forward Current

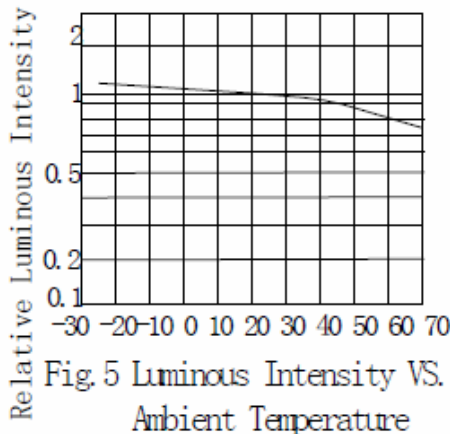


Fig. 5 Luminous Intensity VS. Ambient Temperature

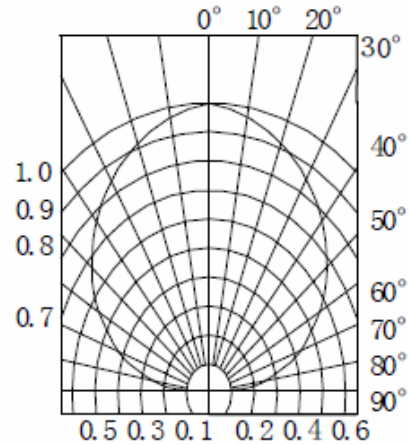


Fig. 6 Spatial Distribution



3.2*2.7*1.1 mm SMD LED

L-C155TBJRCT

REV:A / 0

Bin Range Of Luminous Intensity

| Symbol | Bin Code | Min. | Max. | Unit | Condition |
|--------|----------|------|------|------|-----------|
| Iv(B) | N | 28 | 45 | mcd | IF=20mA |
| | P | 45 | 72 | | |
| | Q | 72 | 112 | | |
| | R | 112 | 180 | | |
| Iv(R) | M | 18 | 28 | mcd | IF=20mA |
| | N | 28 | 45 | | |
| | P | 45 | 72 | | |
| | Q | 72 | 112 | | |

Notes:

1. Tolerance of Luminous Intensity +/-20%
2. Tolerance of Forward Voltage +/-0.15V
3. Tolerance of the Dominate Wavelength +/- 2nm



3.2*2.7*1.1 mm SMD LED

L-C155TBJRCT


REV:A / 0

Cleaning


Do not use unspecified chemical liquid to clean LED they could harm the package.

If clean is necessary, immerse the LED in ethyl alcohol or in isopropyl alcohol at normal temperature for less one minute.

Suggest Soldering Pad Dimensions

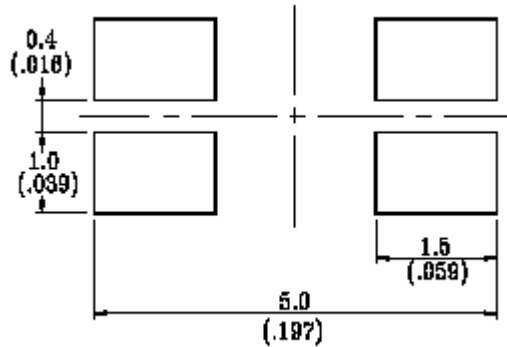

Package Dimensions Of Tape And Reel

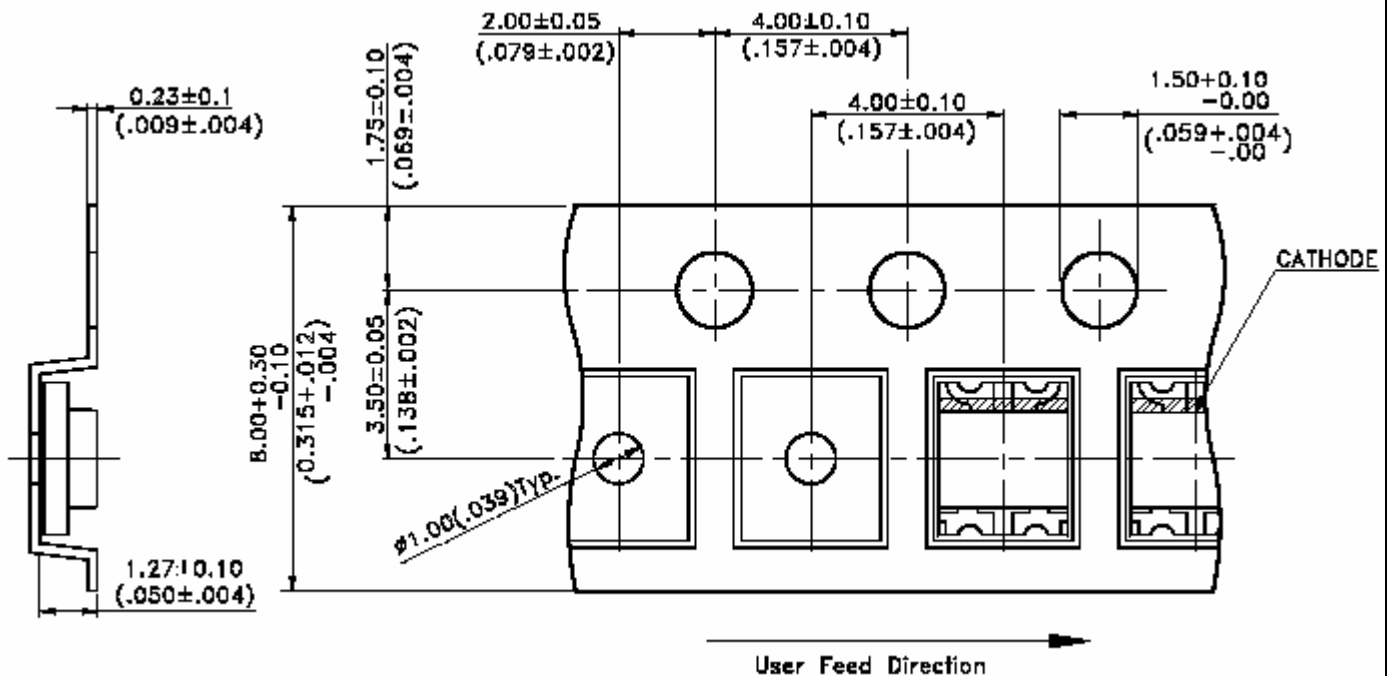

Notes:

1. All dimensions are in millimeters (inches).