NOTES:
1. MOUNTING: Mounts in a ∅.250±.002 [∅6.35mm±.05] panel hole on .375 [9.5mm] centers. Panel thickness .031 [.8 mm] to .125 [3.18mm]. Panel hole should be deburred, but not chamfered.
2. ASSEMBLY: Insert clip mount through panel hole, insert LED into clip mount, slide spacer over clip mount.
3. U.S. & Foreign Pat. Issued & Pend.

| REVISIONS | | | | |
|---|---|---|---|---|
| ECN# | REV. | DESCRIPTION | DATE | INITIALS |
| | 001 | REVISED PER ECR111009AZ01 | 6-20-10 | SMU |

SPACER
(ORDER SEPARATELY)



SPC 125

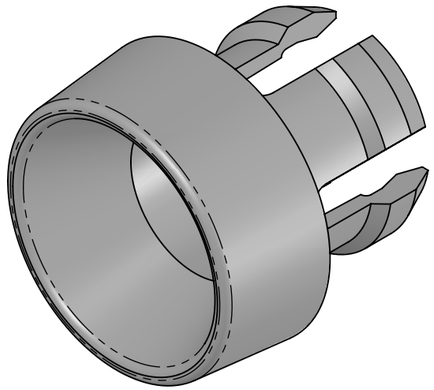

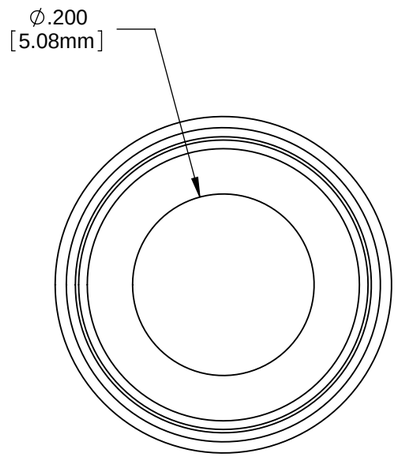


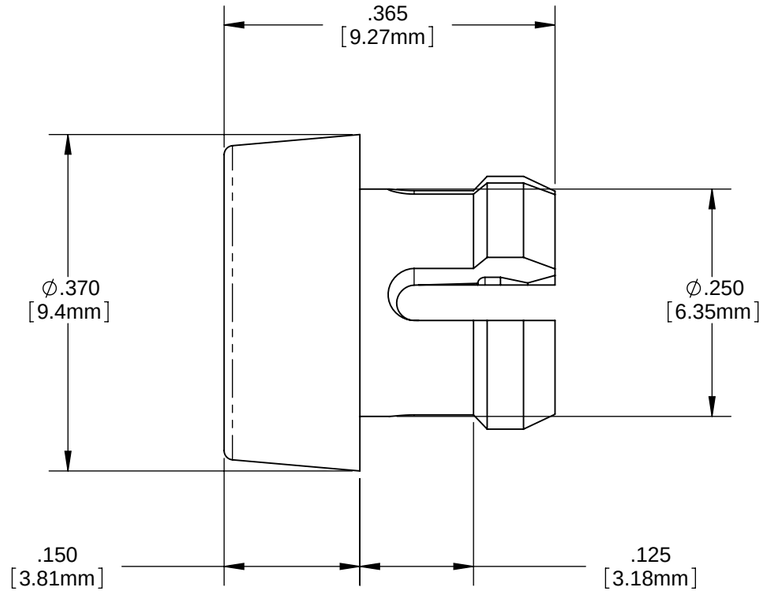


ORDERING CODE : **CLP 129 BLK**

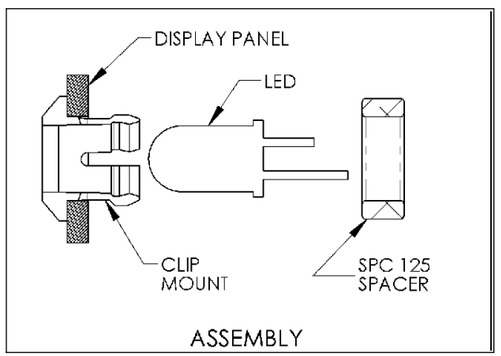


ASSEMBLY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES:
ANGLES ±1°
DECIMALS .X ±.020, .XX ±.010, .XXX ±.005
FINISH
BREAK ALL CORNERS AND SHARP EDGES .030 MAX

THIRD ANGLE PROJECTION

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC IS PROHIBITED.

MATERIAL
POLYCARBONATE , UL 94-V2, BLACK

FINISH

| APPROVAL | | DATE |
|---|---|---|
| DRAWN: | SMU | 6-20-10 |
| CHECKED: | DZ | 6-20-10 |

DO NOT SCALE DRAWING

**VISUAL COMMUNICATIONS COMPANY, INC.**
190 Bosstick Boulevard, Suite101 San Marcos, CA 92069 USA
Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vcclite.com

TITLE:
CLIPLITE® CLP 129 MOUNT

| SIZE | DWG. NO. | REV |
|---|---|---|
| B | CLP 129 BLK | 001 |

SCALE: 1:1 | SHEET 1 OF 1