


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

1203-29-7

REVISIONS	
ISSUE	CHANGES
0	ER 39597 DRK 08/25/06
1	CN 39971 C DRK 06/18/07

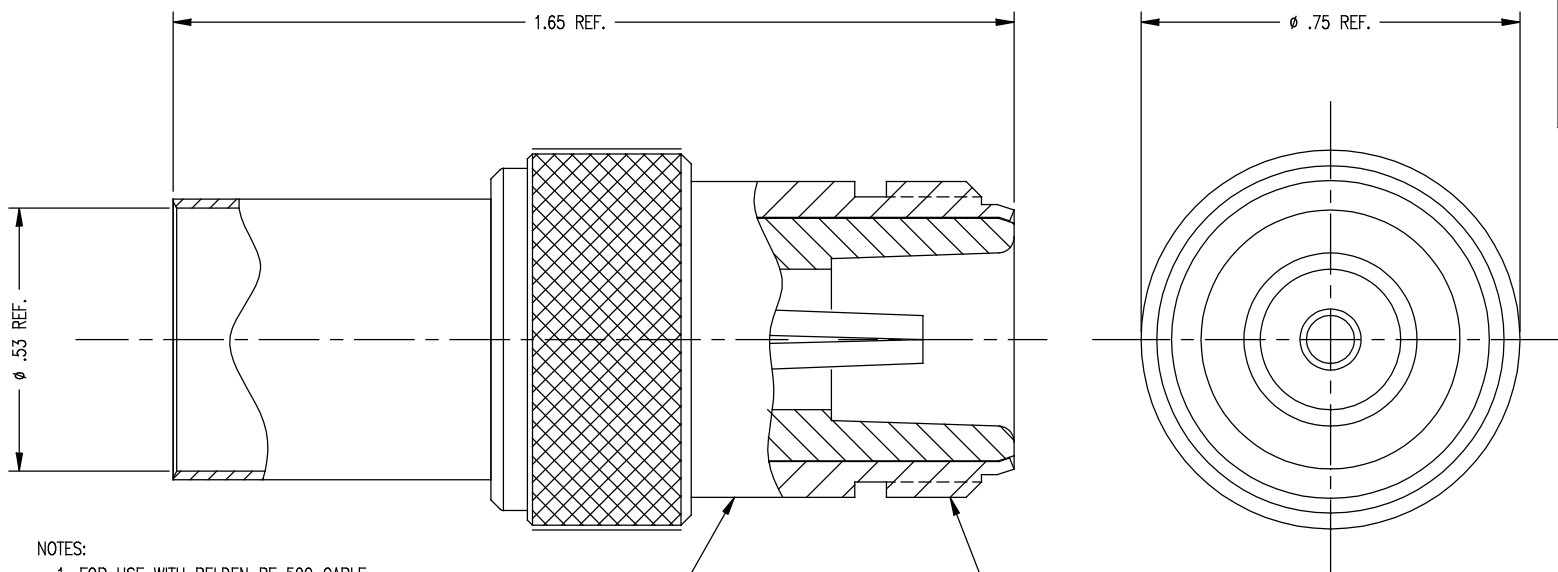

NOTES:

1. FOR USE WITH BELDEN RF 500 CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-781.
3. FOR CRIMPING USE DIE CD500 OR KTH-2287.
4. INTERFACE PER MIL-STD-348, FIG. 304-2.
5. CRIMPING SLEEVE AND CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
6. MATERIALS:
 INSULATOR: TEFLON.
 K-GRIP SLEEVE: COMMERCIAL BRONZE.
 CENTER CONTACT: BER. COPPER, ASTM-B196.
 ALL OTHER METAL PARTS: BRASS.
7. FINISHES:
 CENTER CONTACT: GOLD, ASTM-B488.
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5).
8. ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 50 OHMS.
 WORKING VOLTAGE: 1000 VRMS.
 FREQUENCY RANGE: DC TO 11 GHZ.

STAMP: BELDEN NF500
YRWK(DATE CODE)

5/8-24UNEF-2A THREAD

SCALE 4:1	
APPROX SURFACE AREA	
BELDEN ONLY	
USED ON	
REF: EQR 933	
JACK, N	
DRAWN DRK	DATE 07/02/07
DESIGN DRK	DATE 10/05/05
APPR.	DATE

GSD



1203-29-7