Rev	AWO #	Description	Date	Appr
-	9632	RELEASED	6/25/10	

APPROVED: _____

DATE: _____ TITLE: _____

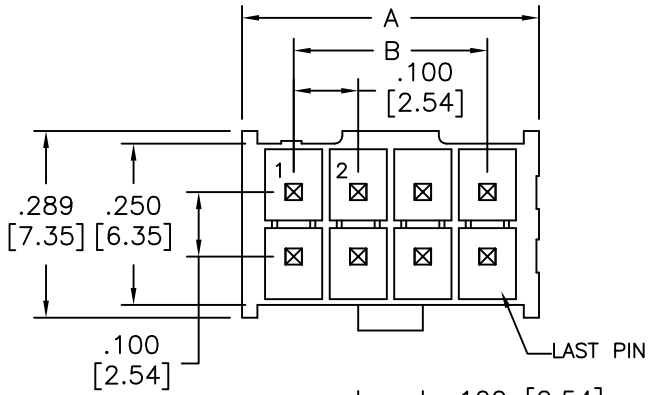

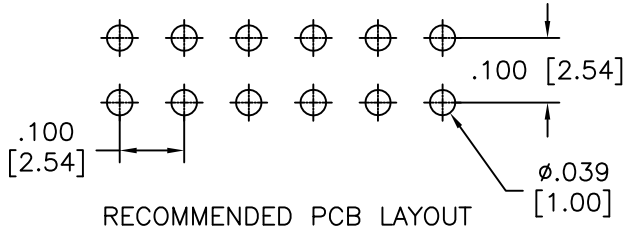

RECOMMENDED PCB LAYOUT

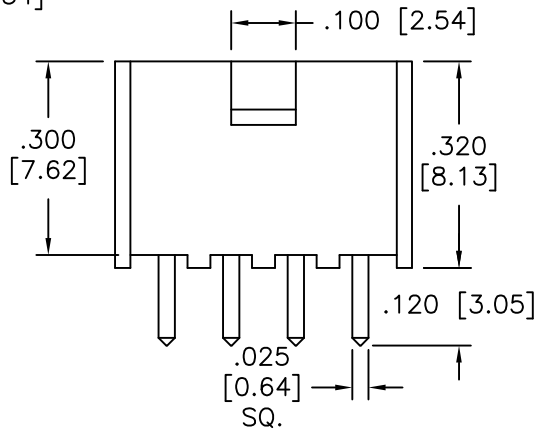

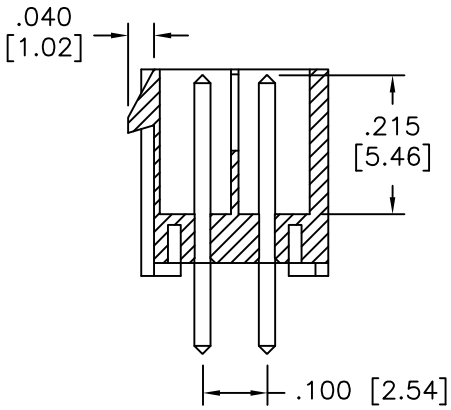

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–2
Insulator color: Black
Contact: Phosphor Bronze, Gold or Tin over Nickel
Electrical:
Rated Current: 3A
Rated Voltage: 675V AC/DC
Contact Resistance: 20 mohms Max
Withstand Voltage: 1000V AC/minute
Insulation Resistance: 1000 mohms min
Operation Temperature: –55°C to +125°C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.
Safety Agency Approvals:
UL Recognized & CSA Certified, File no. E224053

RoHS COMPLIANT

Positions: 2 thru 25 per row
A = .100 [2.54] X No. of Positions per row + .060 [1.52]
B = .100 [2.54] X No. of (Positions–1) per row

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	6/25/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] WAFER, DUAL ROWS, STRAIGHT

SIZE	PART NO.	REV.
X	DMV-XX	-

REF: S00019C | SCALE: NTS | SHEET 1 OF 1