


Available Q3, 1995

8 Input Multiplexer with 3-State Outputs, 8 Input Digital Multiplexer


This device is a high speed, 1-of-8 digital multiplexer. It is able to select one line of data from up to eight inputs. The DV74AC251/ACT251 can be utilized as a universal function generator to generate any four variable logic function. Both true and complementary outputs are provided.

- **Advanced very high speed CMOS**
- **Outputs source/sink 24 mA**
- **Transmission line driving 50 ohms**
- **ACT has TTL compatible inputs**
- **Operation from 2 to 6 volts guaranteed**
- **DC & AC Parameters guaranteed over -40 to +85°C**

DV74AC251 DV74ACT251




N Suffix
Plastic DIP
AVG-003 Case



D Suffix
Plastic SOP
AVG-004 Case

LOGIC DIAGRAM

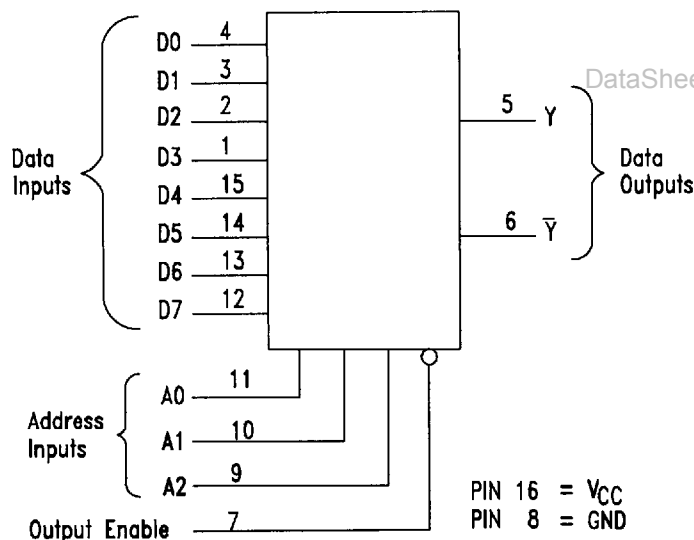

TRUTH TABLE

Output Enable	Inputs			Outputs	
	A2	A1	A0	$\bar{Y}$	Y
H	X	X	X	Z	Z
L	L	L	L	$\bar{D}_0$	D ₀
L	L	L	H	$\bar{D}_1$	D ₁
L	L	H	L	$\bar{D}_2$	D ₂
L	L	H	H	$\bar{D}_3$	D ₃
L	H	L	L	$\bar{D}_4$	D ₄
L	H	L	H	$\bar{D}_5$	D ₅
L	H	H	L	$\bar{D}_6$	D ₆
L	H	H	H	$\bar{D}_7$	D ₇

H = HIGH Voltage Level, L = LOW Voltage Level

X = Either Low or High Logic Level, Z = High Impedance

ABSOLUTE MAXIMUM RATINGS

Maximum ratings are those values beyond which damage to the device may occur.

Symbol	Parameter	AC251, ACT251	Unit
V _{CC}	DC Supply Voltage (Referenced to GND)	- 0.5 to +7.0	V
V _{IN}	DC Input Voltage (Referenced to GND)	- 0.5 to V _{CC} +0.5	V
V _{OUT}	DC Output Voltage (Referenced to GND)	- 0.5 to V _{CC} +0.5	V
I _{IN}	DC Input Current, per Pin	± 20	mA
I _{OUT}	DC Output Sink/Source Current, per Pin	± 50	mA
I _{CC}	DC V _{CC} or GND Current per Output Pin	± 50	mA
T _{stg}	Storage Temperature	- 65 to +150	°C

GUARANTEED OPERATING CONDITIONS

Symbol	Parameter		Min	Typ	Max	Unit
V _{CC}	Supply Voltage	'AC	2.0	5.0	6.0	V
		'ACT	4.5	5.0	5.5	
V _{IN} , V _{OUT}	DC Input Voltage, Output Voltage, (Ref. to GND)		0		V _{CC}	V
t _r , t _f	Input Rise and Fall Time (Note 1) AC Devices	V _{CC} @ 3.0 V		150		ns/V
		V _{CC} @ 4.5 V		40		ns/V
		V _{CC} @ 5.5 V		25		ns/V
t _r , t _f	Input Rise and Fall Time (Note 2) ACT Devices	V _{CC} @ 4.5 V		10		ns/V
		V _{CC} @ 5.5 V		8.0		ns/V
T _A	Operating Ambient Temperature Range		−40		85	°C
C _{IN}	Input Capacitance V _{CC} = 5.0 V	V _{CC} = 5.0 V		4.5		pF
CPD	Power Dissipation Capacitance	V _{CC} = 5.0 V		70		pF

1. V_{IN} from 30% to 70% V_{CC}**AC — 251****DC ELECTRICAL CHARACTERISTICS**

Symbol	Parameter	Conditions	V _{CC} (V)	AC251			Unit
				T _A = +25°C		T _A = −40 to +85°C	
				Typ	Guaranteed Limits		
V _{IH}	Minimum High Level Input Voltage	V _{OUT} = 0.1V or V _{CC} − 0.1 V	3.0	1.5	2.1	2.1	V
			4.5	2.25	3.15	3.15	
			5.5	2.75	3.85	3.85	
V _{IL}	Maximum Low Level Input Voltage	V _{OUT} = 0.1V or V _{CC} − 0.1 V	3.0	1.5	0.9	0.9	V
			4.5	2.25	1.35	1.35	
			5.5	2.75	1.65	1.65	
V _{OH}	Minimum High Level Output Voltage	I _{OUT} = −50 μA	3.0	2.99	2.9	2.9	V
			4.5	4.49	4.4	4.4	
			5.5	5.49	5.4	5.4	
		V _{IN} = V _{IL} or V _{IH} −12mA	3.0		2.56	2.46	V
		I _{OH} −24mA −24 mA	4.5 5.5		3.86 4.86	3.76 4.76	
V _{OL}	Maximum Low Level Output Voltage	I _{OUT} = 50 μA	3.0	0.002	0.1	0.1	V
			4.5	0.001	0.1	0.1	
			5.5	0.001	0.1	0.1	
		V _{IN} = V _{IL} or V _{IH} 12mA	3.0		0.36	0.44	V
		I _{OH} 24mA 24 mA	4.5 5.5		0.36 0.36	0.44 0.44	
I _{IN}	Maximum Input Leakage Current	V _{IN} =V _{CC} , GND	5.5		±0.1	±1.0	μA
I _{oZ}	Maximum 3-state current	V _{IN} =(OE)=V _{IL} , V _{IH} V _{IN} =V _{CC} , GND V _{OUT} =V _{CC} , GND	5.5		±0.5	±5.0	mA
I _{CC}	Maximum Quiescent Supply Current	V _{IN} = V _{CC} or GND	5.5		8.0	80	μA

251

AC CHARACTERISTICS

AC CHARACTERISTICS								
Symbol	Parameter (C _L = 50 pF)	V _{CC} (V) ± 10%	AC251					Unit
			T _A = +25°C			T _A = − 40°C to +85°C		
			Min	Typ	Max	Min	Max	
t _{PLH}	Propagation Delay A _n to Y or $\overline{Y}$	3.3 5.0	1.5 1.5	11.5 8.5	17.5 12.5	1.5 1.5	19.0 13.5	ns
t _{PHL}		3.3 5.0	1.5 1.5	11 8.0	17.5 12.5	1.5 1.5	19.0 13.5	
t _{PLH}	Propagation Delay D to Y or $\overline{Y}$	3.3 5.0	1.5 1.5	10 7.0	14 10	1.5 1.5	15.5 11	ns
t _{PHL}		3.3 5.0	1.5 1.5	9.0 6.5	14 10	1.5 1.5	15.5 11	ns
t _{PZH}	Output Enable Time Output Enable to Y or $\overline{Y}$	3.3 5.0	1.5 1.5	7.5 5.5	11 8	1.5 1.5	12 9.0	ns
t _{PZL}		3.3 5.0	1.5 1.5	7.5 5.5	11 8	1.5 1.5	12 9.0	ns
t _{PHZ}	Output Disable Time Output Enable to Y or $\overline{Y}$	3.3 5.0	1.5 1.5	8.5 7.0	11.5 9.5	1.5 1.5	13 10	ns
t _{PLZ}		3.3 5.0	1.5 1.5	7.0 5.5	11 8.0	1.5 1.5	12 8.5	ns

ACT — 251**DC ELECTRICAL CHARACTERISTICS**

DataSheet4U.com

Symbol	Parameter	Conditions	V _{CC} (V)	ACT251			Unit
				TA = +25°C		TA = −40 to +85°C	
				Typ	Guaranteed Limits		
V _{IH}	Minimum High Level Input Voltage	V _{OUT} = 0.1V or V _{CC} − 0.1 V	4.5 5.5	1.5 1.5	2.0 2.0	2.0 2.0	V
V _{IL}	Maximum Low Level Input Voltage	V _{OUT} = 0.1V or V _{CC} − 0.1 V	4.5 5.5	1.5 1.5	0.8 0.8	0.8 0.8	V
V _{OH}	Minimum High Level Output Voltage	I _{OUT} = −50 μA	4.5 5.5	4.49 5.49	4.4 5.4	4.4 5.4	V
		V _{IN} = V _{IL} or V _{IH} I _{OH} −24mA −24 mA	4.5 5.5		3.86 4.86	3.76 4.76	V
V _{OL}	Maximum Low Level Output Voltage	I _{OUT} = 50 μA	4.5 5.5	0.001 0.001	0.1 0.1	0.1 0.1	V
		V _{IN} = V _{IL} or V _{IH} I _{OL} 24mA 24 mA	4.5 5.5		0.36 0.36	0.44 0.44	V
I _{IN}	Maximum Input Leakage Current	V _{IN} =V _{CC} , GND	5.5		±0.1	±1.0	μA
ΔI _{CCT}	Additional Max I _{CC} /Input	V _{IN} =V _{CC} − 2.1 V	5.5	0.6		1.5	mA
I _{OZ}	Maximum 3-State Current	V _{IN} =(OE)=V _{IL} , V _{IH} V _{IN} =V _{CC} , GND V _{OUT} =V _{CC} , GND	5.5		±0.5	±5.0	μA
I _{CC}	Maximum Quiescent Supply Current		5.5		8.0	8.0	μA

251


DataSheet4U.com

DataSheet4U.com

AC CHARACTERISTICS

Symbol	Parameter (C _L = 50 pF)	V _{CC} * (V) ±10%	ACT251					Unit
			T _A = +25°C			T _A = − 40°C to +85°C		
			Min	Typ	Max	Min	Max	
t _{PLH}	Propagation Delay A _n to Y or $\bar{Y}$	5.0	2.5	7.0	15.5	2.0	17	ns
t _{PHL}		5.0	2.5	7.5	16.5	2.5	18.5	
t _{PLH}	Propagation Delay D to Y or $\bar{Y}$	5.0	2.5	5.5	12	2.0	13	ns
t _{PHL}		5.0	2.5	6.5	12.5	2.5	14	ns
t _{PZH}	Output Enable Time	5.0	1.5	5.0	8.5	1.5	9.0	ns
t _{PZL}	Output Enable to Y or $\bar{Y}$	5.0	1.5	4.5	8.5	1.5	9.5	ns
t _{PHZ}	Output Disable Time	5.0	2.0	6.0	12	2.0	13	ns
t _{PLZ}	Output Enable to Y or $\bar{Y}$	5.0	1.5	4.5	8.5	1.5	9	ns

Symbol	Parameter	Test Conditions	Value Typ	Unit
C_{IN}	Input Capacitance	$V_{CC} = 5.0 \text{ V}$	4.5	pF
C_{PD}	Power Dissipation Capacitance	$V_{CC} = 5.0 \text{ V}$	40	pF

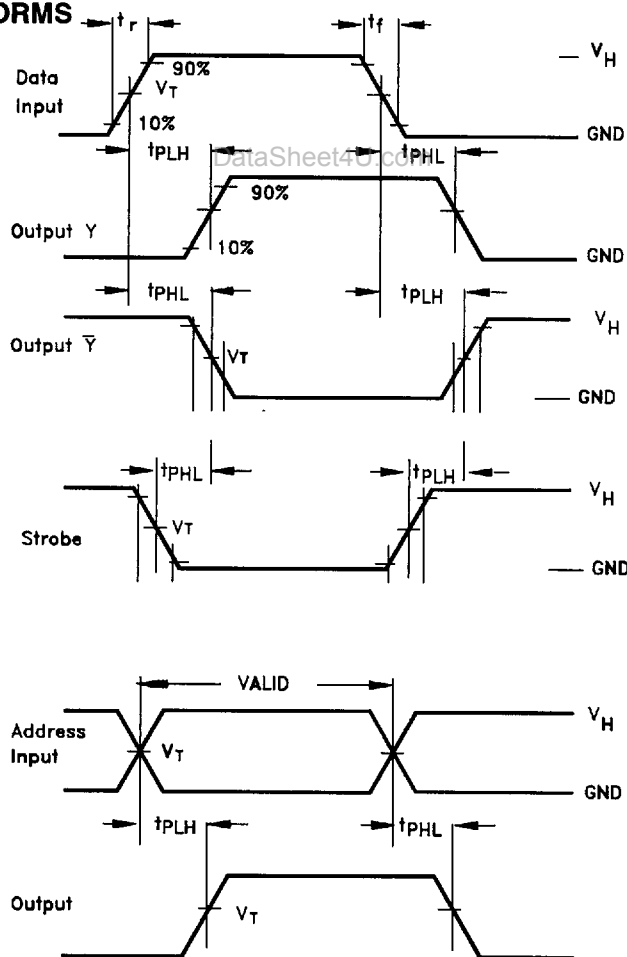SWITCHING WAVEFORMS

Input and output threshold voltage:
 $V_T = 50\% V_{CC}$ for AC; 1.5V for ACT
 $V_H = V_{CC}$ for AC, 3V for ACT

www.DataSheet4U.com