
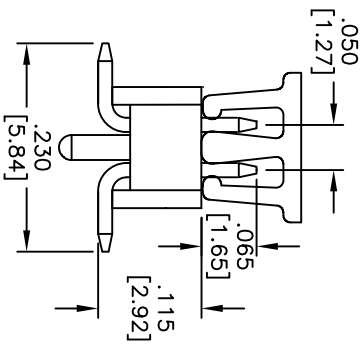
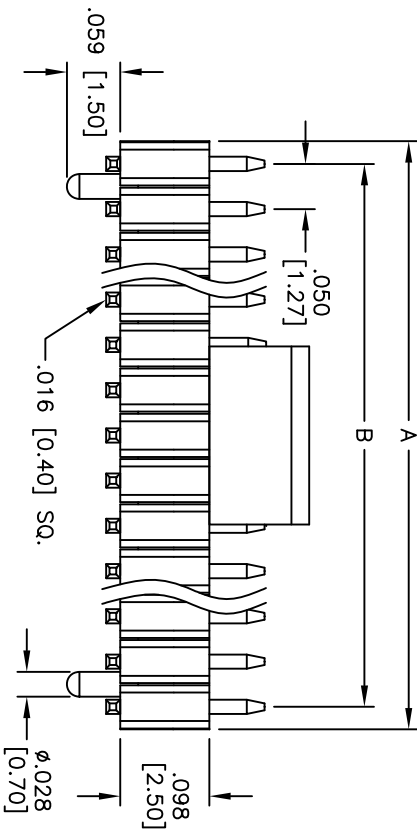
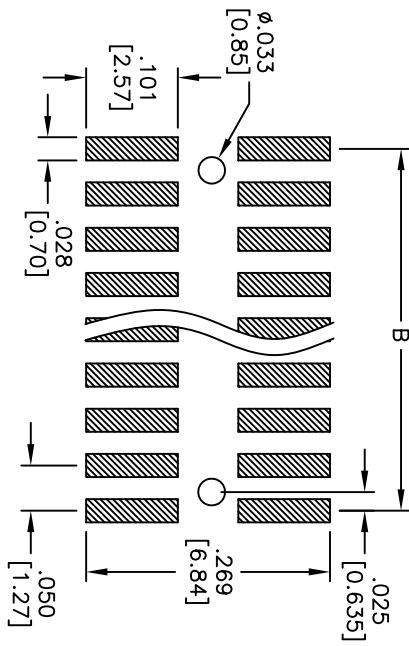


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/14/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

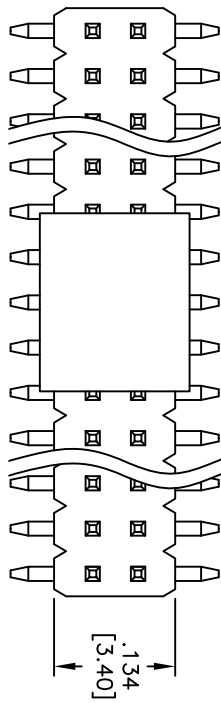

PACKAGED ON TAPE & REEL

SPECIFICATIONS:  
 Material: \_\_\_\_\_  
 Insulator: LCP, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
 Plating: \_\_\_\_\_  
 Gold flash over Nickel underplate on contact area,  
 Tin over copper underplate on tails.

Electrical:  
 Current rating: 1 Amps max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 1000 Mohms min  
 Dielectric withstanding voltage: 300 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant  
 Recommended soldering temp: 260°C for 5 seconds

Positions: 4 thru 50 per Row  
 A = .050 [1.27] x No. of Positions per Row  
 B = .050 [1.27] x No. of Spaces

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .050 [1.27] DUAL ROW PIN HEADER, SMT,  
 SELECTIVE GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLDS	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE	DATE	
DRAWN	DY	7/14/10	
CHECKED			
APPROVED			
SIZE	PART NO.	REV.	
X	HPH2-A1-XX-SG-SMT-.065-P-PP-T/R		
REF: S00032T	SCALE: NTS	SHEET	1 OF 1

