

TECHNICAL DATA
DATA SHEET 4205, REV-

600 VOLT, 70 AMP IGBT DEVICE
VERY HIGH SPEED
WITH ULTRAFAST REVERSE RECOVERY DIODE

ELECTRICAL CHARACTERISTICS

(T_j=25°C UNLESS OTHERWISE SPECIFIED)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
IGBT SPECIFICATIONS					
Collector to Emitter Breakdown Voltage I _C = 250 μA, V _{GE} = 0V	BV _{CES}	600	-	-	V
Continuous Collector Current T _C = 25 °C T _C = 90 °C	I _C	-	-	45 ⁽¹⁾ 30	A
Pulsed Collector Current, 1msec	I _{CM}	-	-	150	A
Gate to Emitter Voltage	V _{GE}	-	-	+/-20	V
Gate-Emitter Leakage Current, V _{GE} = +/-20V	I _{GES}	-	-	+/- 100	nA
Gate Threshold Voltage, I _C = 250 μA	V _{GE(TH)}	2.5	-	5.0	V
Zero Gate Voltage Collector Current V _{CE} = 600 V, V _{GE} = 0V T _i = 25°C V _{CE} = 480 V, V _{GE} = 0V T _i = 125°C	I _{CES}	-	-	0.2 3.0	mA mA
Collector to Emitter Saturation Voltage, °C I _C = 24A, V _{GE} = 15V, °C T _C = 25 T _C = 125	V _{CE(SAT)}	-	2.2 2.0	2.5 -	V
Input Capacitance Output Capacitance Reverse Transfer Cap. V _{CE} = 25 V, V _{GE} = 0 V, f = 1 MHz	C _{ies} C _{oes} C _{res}	-	1500 145 40	-	pF
Turn On Delay Time Rise Time Turn Off Delay Time Fall Time Turn off Energy Loss (T _j = 125 °C, I _C = 24A, V _{GE} = 15V, inductive load, V _{CC} = 400 V, R _G = 5 Ω)	t _{d(on)} t _r t _{d(off)} t _f E _{off} E _{on}	-	13 17 130 80 0.38 0.22	-	nsec mJ mJ
Maximum Thermal Resistance	R _{θJC}	-	-	0.85	°C/W
Maximum and Storage Junction Temperature	T _{Jmax}	-55	-	150	°C

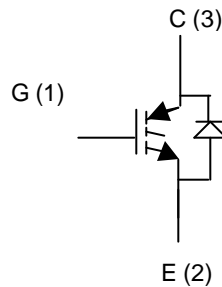
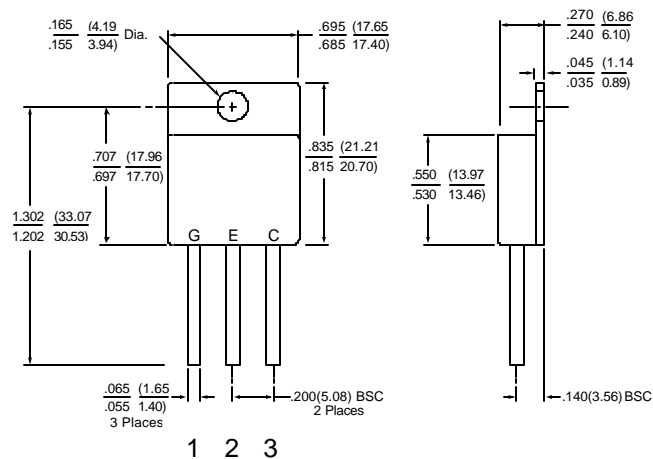
SENSITRON

TECHNICAL DATA
DATA SHEET 4205, REV-

ULTRAFAST DIODE RATING AND CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Diode Peak Inverse Voltage	PIV	600	-	-	V
Continuous Forward Current, $T_C = 25\text{ }^\circ\text{C}$ $T_C = 90\text{ }^\circ\text{C}$	I_F	-	-	45 ⁽¹⁾ 30	A
Forward Surge Current, $t_p = 8.3\text{ msec}$	I_{FSM}	-	-	300	A
Diode Forward Voltage, $I_F = 30\text{A}$ $T_C = 25\text{ }^\circ\text{C}$ $T_C = 125\text{ }^\circ\text{C}$	V_F	- -	1.7 -	1.8 1.7	V
Diode Reverse Recovery Time	t_{rr}	-	100	140	nsec
Diode Reverse Recovery Current ($I_F = 30\text{A}$, $V_{RR} = 100\text{V}$, $di/dt = 100\text{ A}/\mu\text{s}$)	I_{RM}	-	-	4	A
Maximum Thermal Resistance	$R_{\theta JC}$	-	-	1.0	$^\circ\text{C}/\text{W}$
Maximum and Storage Junction Temperature	T_{jmax}	-55	-	150	$^\circ\text{C}$

(1) Current is limited by package leads to 45A; Die ratings are 70A.

Schematic Diagram:**Package Drawing:
(TO258)**

TECHNICAL DATA

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.