
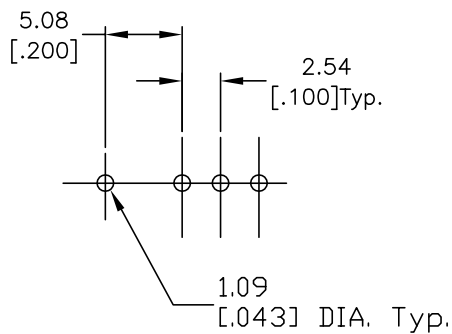

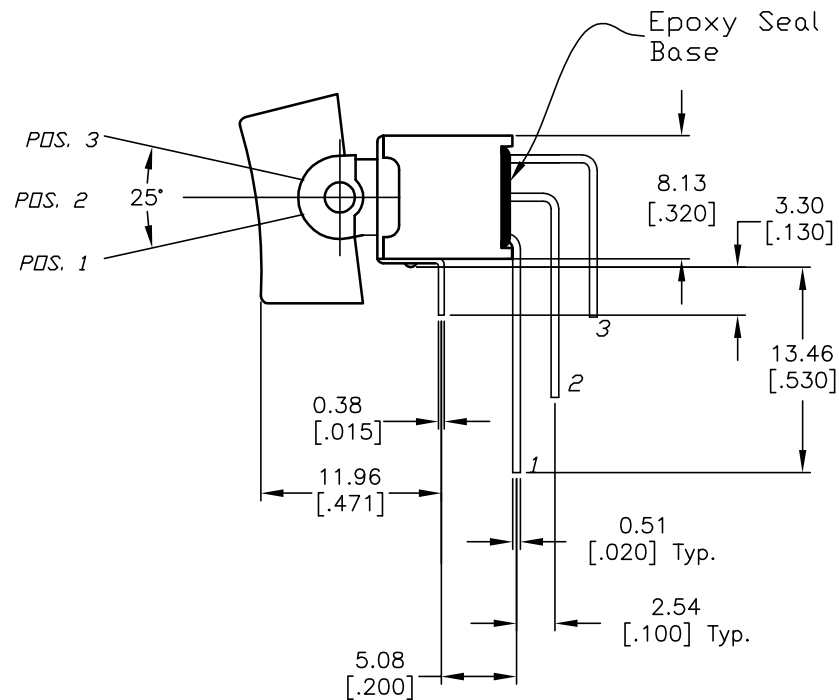
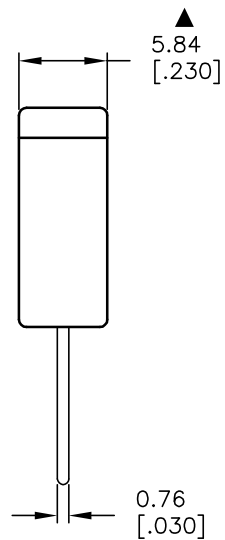




RECOMMENDED PCB LAYOUT

CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NONE	ON
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0 $\pm$ 0.4
0.00 $\pm$ 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3 Amps @120 VAC or 28 VDC; 1.5 Amps @250 VAC.
5. ELECTRICAL LIFE: 30,000 make-and-break cycles at full load.
6. INSULATION RESISTANCE: 1000 mega-ohm typical
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level
8. OPERATING TEMP.: -30°C to 85°C
9. ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH®

A	14301	RELEASED FOR PRODUCTION	9/9/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE

400AWMSP1R2M7QE

SCALE

2:1

DATE

9/9/04

DR

AR

DWG

T401998

REV

A