


P1

CONN OUTER MOLD: WM-020



**Material:**


- NOUL [28AWG(7/0.12 TC)\*(Red, White)+S(43/0.12 TC)]\*2F
- Jacket: Black
- OD: 2.8\*5.6mm
- Connector (P1) 3.5ST Male
- Tray 6.0mm
- L=26mm
- Mold type Ni-plated
- Insulator color: Black
- Connector (P2 & P3) 3.5ST Female
- OD:8.0\*ID3.5mm
- L=23mm
- Mold type Ni-plated
- Insulator color: Black
- Outer Jacket: Outer model PVC 45P, color Black
- Inner Jacket: Clear LDPE
- Tube: Heat Shrink tube, Black OD:1.5\*L15mm



CONN OUTER MOLD: WM-021

**PIN ASSIGNMENT**

P2	RED	P1	RED	P3
1	WHTIE	1	WHTIE	1
2	SPIRAL	2	SPIRAL	2
3		3		3

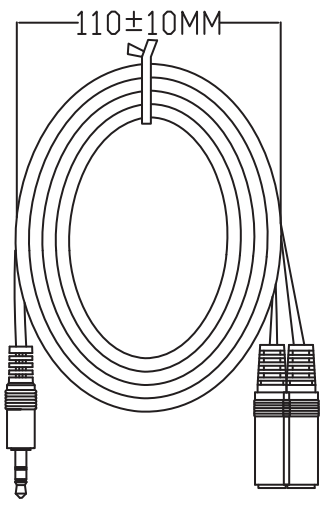

**Electrical:**

- 100% Test, (short, open, miswire)
- Conductor resistance: 2Ω Max.
- Insulation Resistance: 10Ω Min.
- Hi-Pot: 300V DC/10ms

G	Scale	Free				Date	Name	Title <b>Audio Y-cable</b> 3.5mm, Male to 2x Female, 2M
	TOLERANCE					Drawn	Wilson	
H	X.	±0.3				Approved	Groll	ASSMANN WSW-No. <b>AK-102031-R</b>
	X.X	±X						Drawing-No.
	X.XX	±X						rev00
	DIM	TOL						Replace
	X.°	±X°						Sheet
	X.X°	±X°						1/1
	Angle	TOL	Id.	Modification	Date	Name		

Unit: mm



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@assmann.us