

isc N-Channel MOSFET Transistor

2SK1118

DESCRIPTION

- Drain Current  $-I_D=6A @ T_C=25^\circ C$
- Drain Source Voltage-  
:  $V_{DSS}= 600V(\text{Min})$
- Fast Switching Speed

APPLICATIONS



- Designed for high voltage, high speed power switching applications such as switching regulators, converters, solenoid and relay drivers.

ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ C$ )

SYMBOL	ARAMETER	VALUE	UNIT
$V_{DSS}$	Drain-Source Voltage ( $V_{GS}=0$ )	600	V
$V_{GS}$	Gate-Source Voltage	$\pm 30$	V
$I_D$	Drain Current-continuous@ $TC=25^\circ C$	6	A
$P_{tot}$	Total Dissipation@ $TC=25^\circ C$	45	W
$T_j$	Max. Operating Junction Temperature	150	$^\circ C$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance,Junction to Case	2.77	$^\circ C/W$
$R_{th j-a}$	Thermal Resistance,Junction to Ambient	62.5	$^\circ C/W$

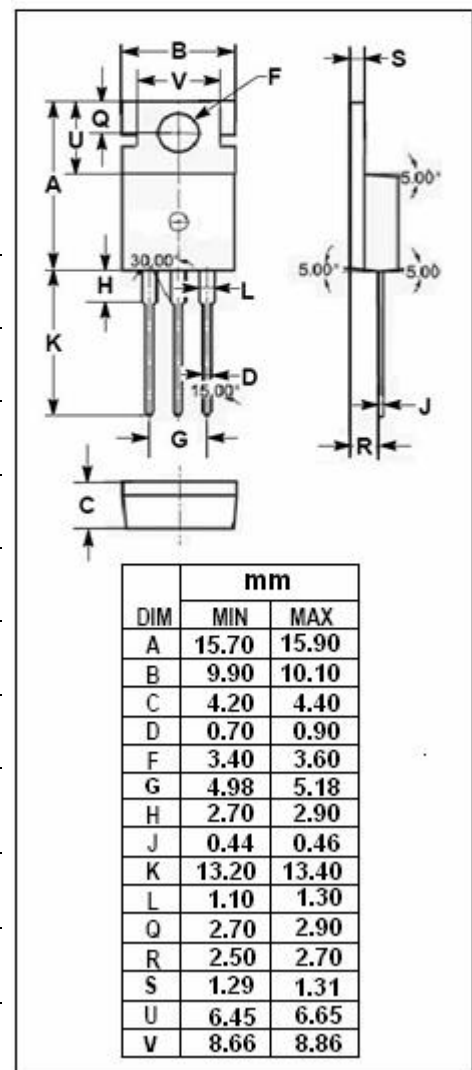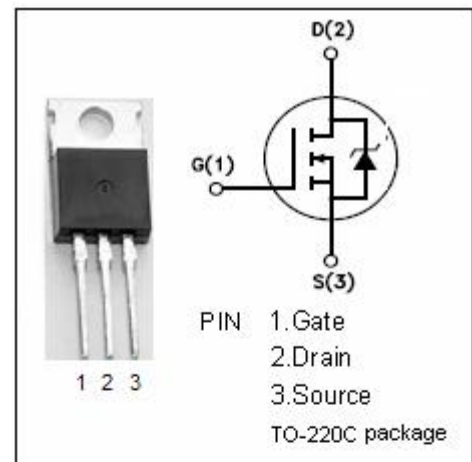

## isc N-Channel Mosfet Transistor

2SK1118

• ELECTRICAL CHARACTERISTICS ( $T_C=25^\circ\text{C}$ )

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0; I_D=1\text{mA}$	600			V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}; I_D=1\text{mA}$	1.5		3.5	V
$R_{DS(on)}$	Drain-Source On-stage Resistance	$V_{GS}=10\text{V}; I_D=3\text{A}$		0.95	1.25	$\Omega$
$I_{GSS}$	Gate Source Leakage Current	$V_{GS}= \pm 25\text{V}; V_{DS}=0$			$\pm 100$	nA
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=600\text{V}; V_{GS}=0$			300	$\mu\text{A}$
$V_{SD}$	Forward On-Voltage	$I_S=6\text{A}; V_{GS}=0$			2.0	V
$t_r$	Rise time	$V_{GS}=10\text{V}; I_D=3\text{A};$ $R_L=100\ \Omega$		25	50	ns
$t_{on}$	Turn-on time			40	80	ns
$t_f$	Fall time			20	40	ns
$t_{off}$	Turn-off time			80	170	ns