




FCS-1150 2MP/2MP: 1

! Mounting kits are to be ordered separately.

Zoom Network camera, 3-2MP/2MP, 802.3af PoE, 2MP/2MP, 12x Optical Zoom, WDR

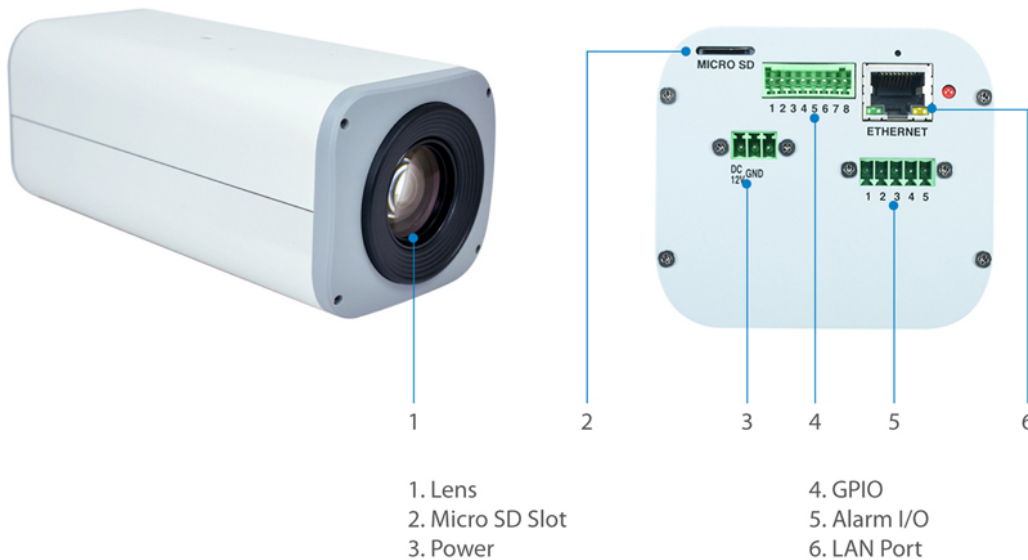

Key Features

- 2MP 2MP/2MP Micro SDHC/SDXC 2MP 2MP
- 3-2MP/2MP 2MP/2MP
- Supports 12x optical zoom
- 2MP 2MP 2MP 2MP/2MP 2MP WDR(2MP 2MP 2MP) 2MP
- 2MP: H.264/MJPEG
- 2MP 2MP 2MP 2MP 2MP IR-2MP 2MP
- 2MP 2MP 2MP: 12VDC/PoE (IEEE 802.3af)
- 2MP 64-2MP 2MP/2MP 2MP 2MP(OneSecure App 2MP)



System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

IEEE 802.1X Network Access Control

TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour

Image Sensor:

3-Megapixel 1/3" Progressive Scan CMOS

Connectors and Cabling:

1 x RJ-45 10/100 Mbps PoE port

1 x Auto Iris (DC Drive)

1 x 3.5mm line out

1 x 3.5mm line in

1 x DC power jack (12V)

I/O terminal block (1 DI/1 DO)

Modularity:

1 x MicroSDHC/ MicroSDXC card slot

Button:

Reset Button

Indicator:

Power & Link

Lens:

Zoom, DC iris, Auto focus, f5.2-62.4mm, F1.8-3.0

IR Cut Filter:

Removable infrared-cut filter for day & night function

Shutter Time:

1/5 ~ 1/10,000 sec

Angle of View:

50.2°-4.69°

Pan/Tilt/Zoom:

12x optical, Digital Zoom to very high detail available on Software

Video Compression:

H.264 / MJPEG

Resolution:

3M(2048 x 1536)

Video Format:

RAW

Audio Compression:

G.711

Power:

Power Consumption: PoE Class 3 (IEEE802.3af) / 5.28 W

DC 12V (adapter not included) / 4.44 W

Power Input: DC12V / 802.3af PoE

Features

General:

Backup: MicroSDHC /MicroSDXC card slot for local storage

Video:

Image Setting: - Adjustable image size, quality and bit rate

- Configurable brightness, sharpness, contrast, saturation, white balance and exposure

- AGC/AWB/AES

- Back Light Compensation (BLC)

- Wide Dynamic Range (WDR), Superior WDR (110 dB)

- 2D Noise Reduction (2DNR)

Streaming: Up to 2 video streams

Audio:

Streaming: 2-way audio

Input/Output: line input, line output

Performance**Data Transfer Rate:**

10/100Mbps

Storage Capacity:

SD/MicroSD memory card of up to 64GB

Frame Rate:

20 fps at 2048 x 1536; 30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 640 x 480; 15 fps at 320 x 240

Minimum illumination:

Color: 0.1 lux

B/W: 0.05 lux at F1.8

Environment**Temperature (°C):**

Operating: -10°C ~ 50°C

Humidity (Non-condensing):

Operating: 10% ~ 85%

Physical Specifications**Dimensions (W x D x H mm):**

81 x 176 x 71

Weight (g):

634 g

Others**Approval and Compliance:**


CE, FCC, ONVIF

Deployment:

Wall/Ceiling Mount

Operation Systems:

Microsoft Windows 8/7/Vista/XP

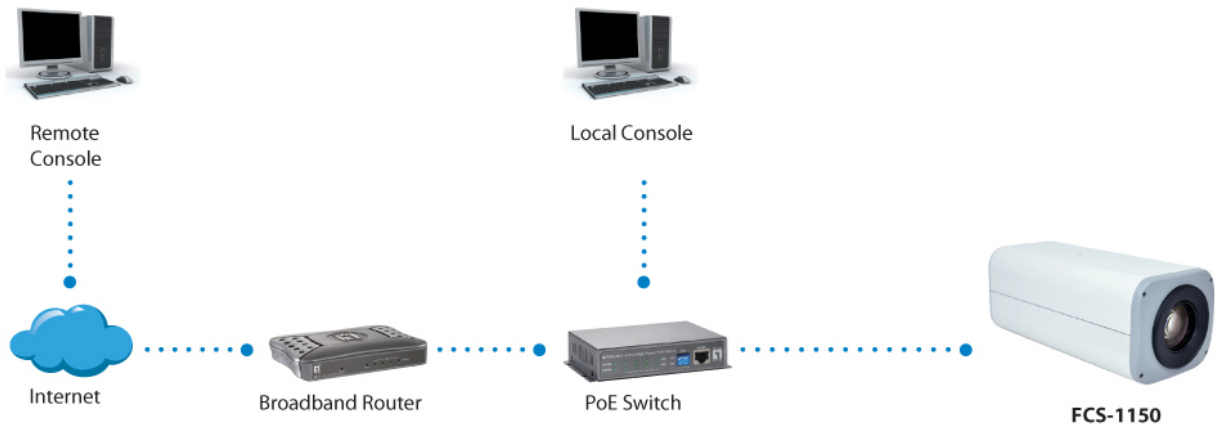

Order Information

FCS-1150

Package Contents

FCS-1150
Screw Kit
Quick Installation Guide
Resource CD (User Manual, Utility, QIG)



CAS-3105
Bracket for Zoom Box Cameras

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.