


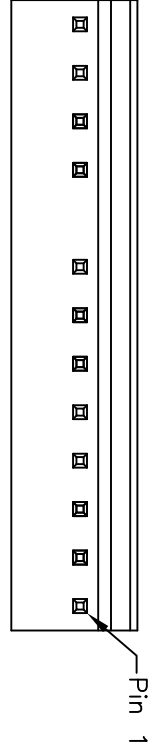


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/25/09	

APPROVED: _____
 DATE: _____ TITLE: _____

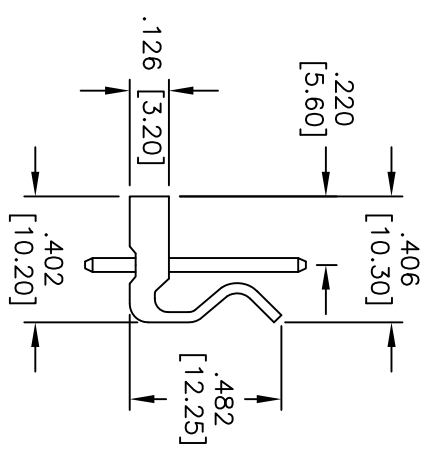

RECOMMENDED PCB LAYOUT

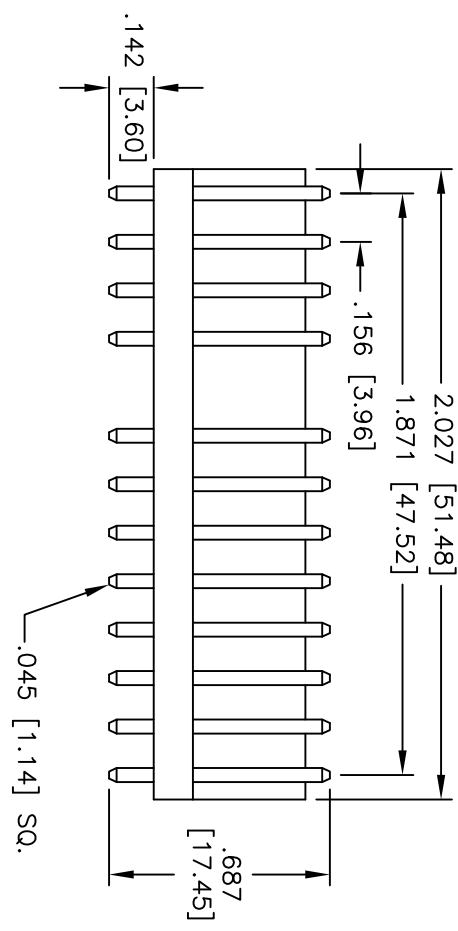

SPECIFICATIONS:

- Material: Nylon 66, rated UL 94V-2
- Insulator color: Natural
- Contacts: Brass
- Plating: Gold flash over Copper underplate overall
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 7 Amps max
 - Contact resistance: 10 Mohms max
 - Dielectric withstanding voltage: 1500 VAC for 1 minute
 - Temperature Rating: Operating temperature: -40°C to +105°C

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] LOCKING HEADER, PCB, STRAIGHT
 GOLD FLASH PLATED, REMOVE PIN #9

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS		DATE	
DRAWN	DY	11/25/09	
CHECKED			
APPROVED			
SIZE	PART NO.	REF:	SCALE: NTS
X	LHB-13-SA1-G-X09	S00123T	
REV.		SHEET	1 OF 1