



Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

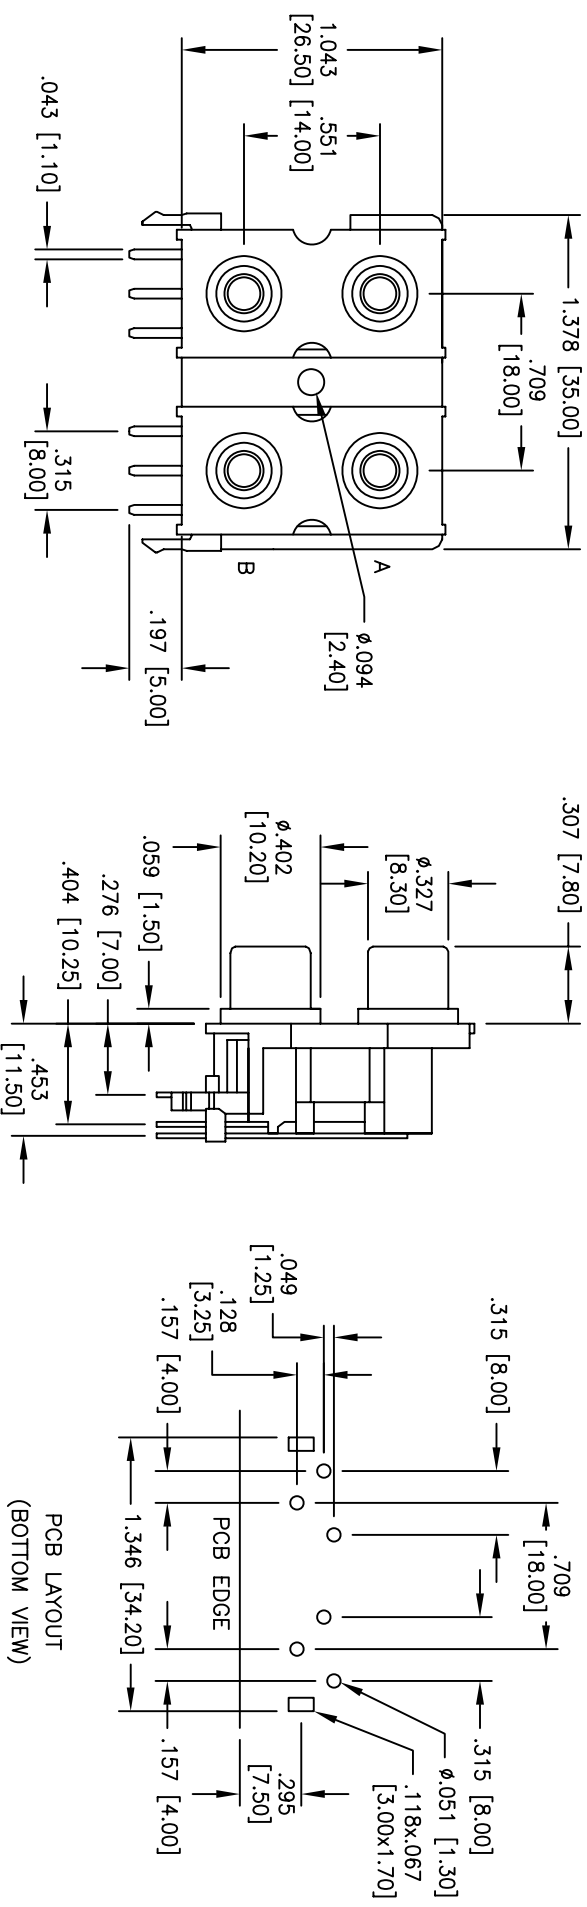

**SPECIFICATIONS:**  
 Material: Insulator: PBT, Glass reinforced, rated UL 94V-0  
 Insulator colors: Red, Black, Yellow, White  
 Bushing: Brass, Nickel plated  
 Contacts: Brass  
 Plating: Tin or Silver over Copper underplate

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES: .10 .020 .015  
 .XX ± .10 ØXX ± .015  
 .XXX ± .015 ØXXX ± .010

COLOR = X (TOP PORT) / X = (BOTTOM PORT)

JACKS A & B CAN BE ANY COMBINATION OF AVAILABLE COLORS

Electrical:  
 Operating voltage: 12 VDC max.  
 Current rating: 1 Amp max.  
 Contact resistance: 30 mohms max. initial  
 Insulation resistance: 100 Mohms min.  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE	TITLE
DRAWN	SS	10/4/04
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	RCA-10-4-XX	-
REF:	SCALE: NTS	SHEET 1 OF 1