


## 2330QD, 2332QD and 2390QD Series Non-Relampable Neon-Incandescent Indicator Lights

### Description and Features

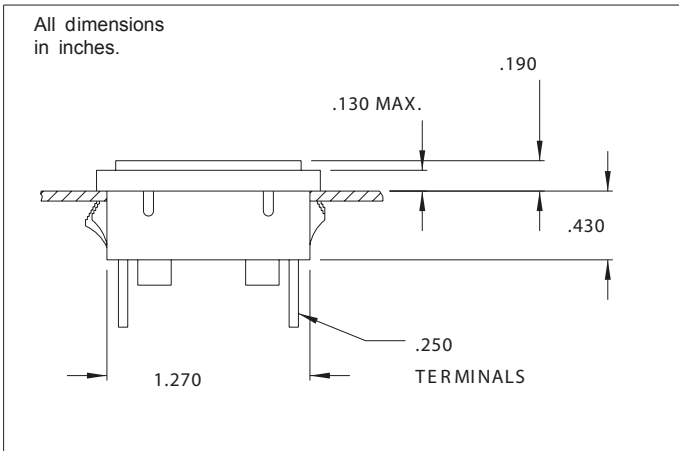

**Mounting:** Will snap-fit into Ø.032/.100 thick panels, use speednut for other panel thicknesses. Available with speednut SN1963. Mounting hole pattern on page SP3.

**Terminals:** Quick-connect, tinned brass .187 x .020

**Lens:** Polycarbonate

**Bezel:** Polished stainless steel. For black finish add "X" after the series letter(s).

| Lens Color | Neon  | Incandescent                         |
|------------|---|--------------------------------------|
|            | Model No.<br>(105-125VAC)<br>.250 Terminals | Model No.<br>(28V)<br>.250 Terminals |
| Red        | 2330QD1                                     | 2390QD1-28V                          |
| Amber      | 2330QD3                                     | 2390QD3-28V                          |
| White      | 2330QD4                                     | 2390QD4-28V                          |
| Green      | 2332QD5*                                    | 2390QD5-28V                          |
| Lamp used  | C6A+Resistor                                | #2187                                |

\*Incorporates G2B lamp and resistor  
Underwriters Laboratories (UL) File No. E20325  
Canadian Standards Association (CSA) File No. LR13346