

## APPROVAL DRAWING

Surge Components product name
SES12VN1010-5 TR (RoHS compliant)

### CONTENTS

1. DESCRIPTION
2. FEATURE
3. APPLICATION
4. ELECTRICAL CHARACTERISTICS
5. ABSOLUTE MAXIMUM RATING
6. TYPICAL CHARACTERISTICS
7. PRODUCT DIMENSION

Surge Components, Inc.


Customer Acknowledgement
--------------------------

Manufacturer Surge Components, Inc.
2009-05-06

## 1. DESCRIPTION

These integrated transient voltage suppressor devices (TVS) are designed for applications requiring transient overvoltage protection. They are intended to be used in sensitive equipment such as wireless headsets, PDAs, digital cameras, computers, printers, communication systems, medical equipment, and other applications.

Their integrated design provides very effective and reliable protection for four separate lines using only one package. These devices are ideal for situations where board space is at a premium.

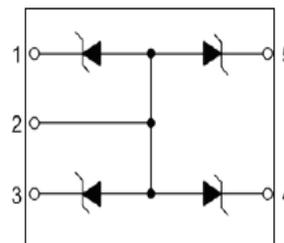

## 2. FEATURE

- Solid-state silicon-avalanche technology
- DFN-5 package
- Uni-Directional or Bi-Directional protection
- protects up to four data lines
- 65 watts peak pulse power ( $t_p = 8/20\mu s$ )
- Low clamping factor
- Low leakage current
- Low capacitance
- Complies with the following standards:  
IEC 61000-4-2(ESD) Air-15kv, Contact-8kv

## 3. APPLICATION

- Cellular and Portable Electronics
- Serial and parallel Ports
- Microprocessor Based Equipment
- Notebooks, Desktops, Servers

**4. ELECTRICAL CHARACTERISTICS PER LINE@25°C (UNLESS OTHERWISE SPECIFIED)**

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Reverse stand-off voltage	$V_{RWM}$				12	V
Reverse Breakdown voltage	$V_{BR}$	$I_T=1mA$			12.7	V
Reverse Leakage Current	$I_R$	$V_{RWM}=9V$ $T=25^\circ C$			0.5	$\mu A$
Junction Capacitance	$C_J$	$V_R=0V$ $f=1MHz$		6.5	10	pF
Junction Capacitance	$C_J$	$V_R=3.0V$ $f=1MHz$		3.5	5.0	pF

**5. ABSOLUTE MAXIMUM RATING @25°C**

Rating	Symbol	Value	Units
Peak Pulse Power( $t_p=8/20\mu s$ )	$P_{PP}$	65	W
ESD per IEC 61000-4-2 (Air)	$V_{ESD}$	15	kV
ESD per IEC 61000-4-2 (Contact)	$V_{ESD}$	8	kV
Lead Solid Temperature( 10 seconds max)	$T_L$	260	$^\circ C$
Operating Temperature	$T_j$	-55 to +150	$^\circ C$
Storage Temperature	$T_{STG}$	-55 to +150	$^\circ C$

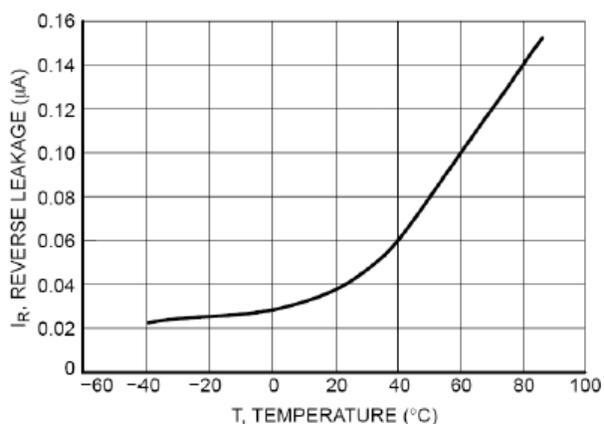
**6. TYPICAL CHARACTERISTICS**


Figure 1. Reverse Leakage versus Temperature

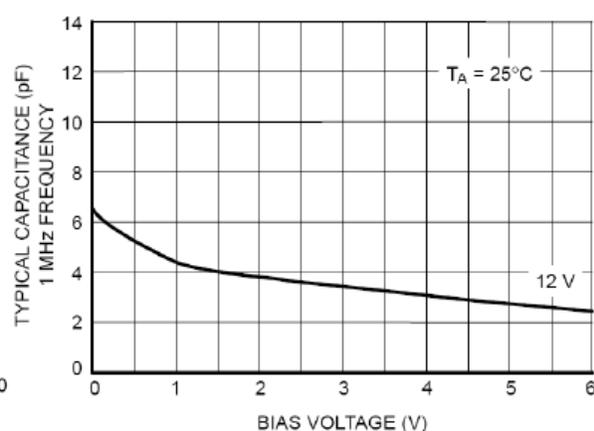


Figure 2. Capacitance

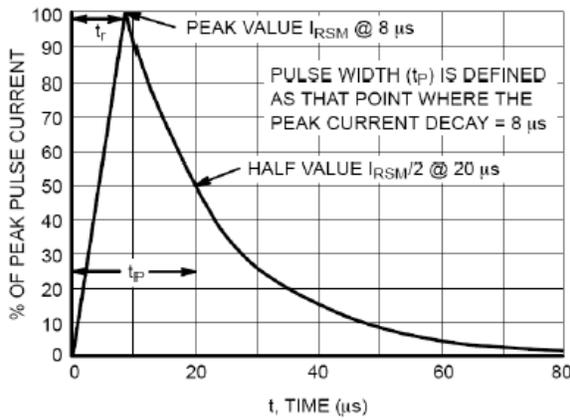


Figure 3.  $8 \times 20 \mu\text{s}$  Pulse Waveform



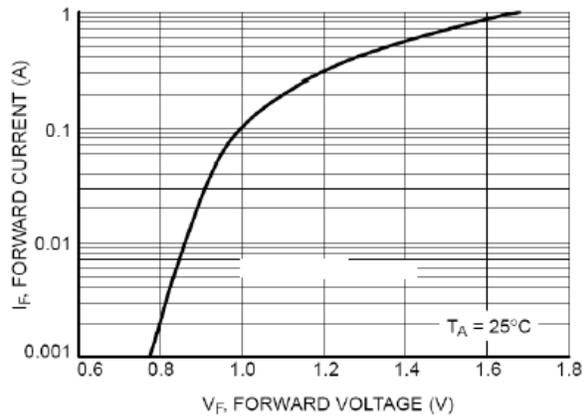


Figure 4. Forward Voltage

## 7. PRODUCT DIMENSION

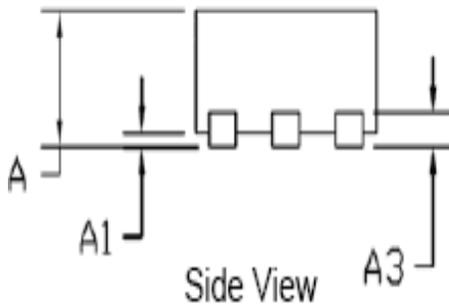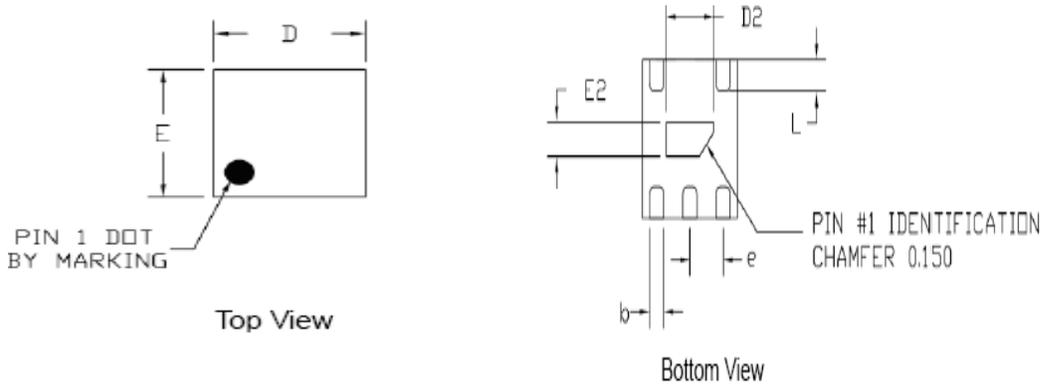

Common Dimensions (mm)			
PKG	X1:Extrem thin		
Ref	Min	Nom	Max
A	0.40	-	0.50
A1	0.00	-	0.05
A3	0.125 Ref		
D	0.95	1.00	1.05
E	0.95	1.00	1.05
D2	0.45	0.50	0.55
E2	0.17	0.22	0.27
L	0.15	0.20	0.25
b	0.12	0.15	0.18
e	0.35 BSC		