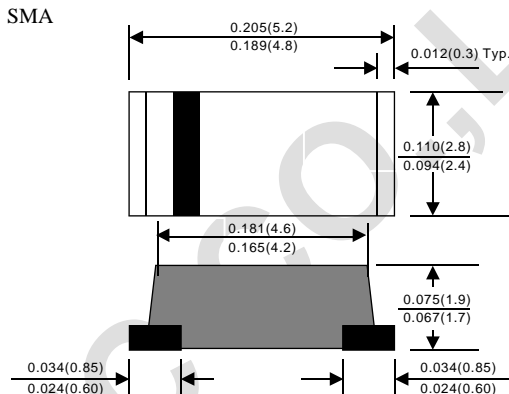


1WATT MELF ZENER DIODE

<p>FEATURES</p> <ul style="list-style-type: none"> ● LOW COST ● SMALL SIZE <p>MECHANICAL DATA</p> <ul style="list-style-type: none"> ● CASE : MELF ● TERMINALS : SOLDERABLE PER MIL-STD -202, METHOD 208 ● POLARITY : COLOR BAND DENOTES CATHODE ● MOUNTING POSITION : ANY ● WEIGHT : 0.15 GRAMS 	<p style="text-align: center;">SMA</p> 
---	---

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS
 RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED
 STORAGE AND OPERATING TEMPERATURE RANGE -55 TO + 150°C

ELECTRICAL CHARACTERISTICS (TA=25°C UNLESS OTHERWISE NOTED) VF=1.2V MAX, IF = 200mA FOR ALL TYPES								
JEDEC TYPE NO	NOMINAL ZENER VOLTAGE	TEST CURRENT	MAXIMUM ZENER IMPEDANCE			LEAKAGE CURRENT		SURGE CURRENT
			Z _{ZT} @ I _{ZT} OHMS	Z _{ZK} @ I _{ZK} OHMS	I _{ZK} mA	I _R µA MAX	V _R VOLTS	
ZS4728A	3.3	76	10	400	1	100	1	1380
ZS4729A	3.6	69	10	400	1	100	1	1260
ZS4730A	3.9	64	9	400	1	50	1	1190
ZS4731A	4.3	58	9	400	1	10	1	1070
ZS4732A	4.7	53	8	500	1	10	1	970
ZS4733A	5.1	49	7	550	1	10	1	890
ZS4734A	5.6	45	5	600	1	10	2	810
ZS4735A	6.2	41	2	700	1	10	3	730
ZS4736A	6.8	37	3.5	700	1	10	4	660
ZS4737A	7.5	34	4	700	0.5	10	5	605
ZS4738A	8.2	31	4.5	700	0.5	10	6	550
ZS4739A	9.1	28	5	700	0.5	10	7	500
ZS4740A	10	25	7	700	0.25	10	7.6	454
ZS4741A	11	23	8	700	0.25	5	8.4	414
ZS4742A	12	21	9	700	0.25	5	9.1	380
ZS4743A	13	19	10	700	0.25	5	9.9	344
ZS4744A	15	17	14	700	0.25	5	11.4	304
ZS4745A	16	15.5	16	700	0.25	5	12.2	285
ZS4746A	18	14	20	750	0.25	5	13.7	250
ZS4747A	20	12.5	22	750	0.25	5	15.2	225
ZS4748A	22	11.5	23	750	0.25	5	16.7	205
ZS4749A	24	10.5	25	750	0.25	5	18.2	190
ZS4750A	27	9.5	35	750	0.25	5	20.6	170
ZS4751A	30	8.5	40	1000	0.25	5	22.8	150
ZS4752A	33	7.5	45	1000	0.25	5	25.1	135
ZS4753A	36	7.0	50	1000	0.25	5	27.4	125

NOTE : SUFFIX "A" FOR ±5%

RATINGS AND CHARACTERISTIC CURVES ZS4728A THRU ZS4753A

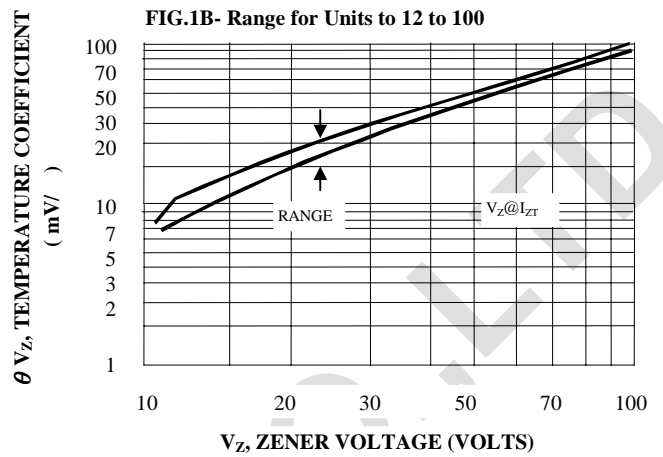
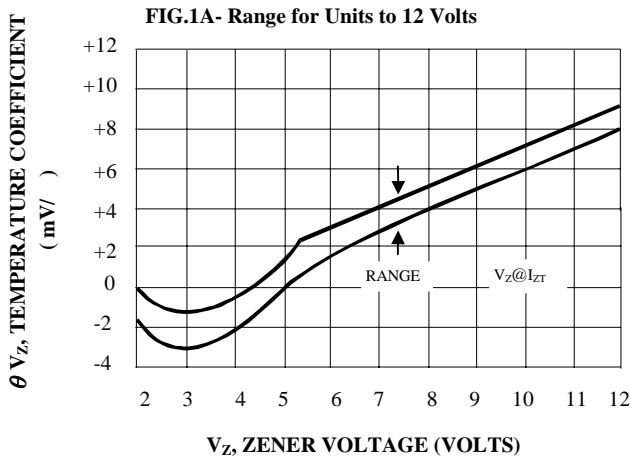


Figure 2. Temperature Coefficients (-55°C to +150°C temperature change; 90% of the units are in the ranges indicated.)

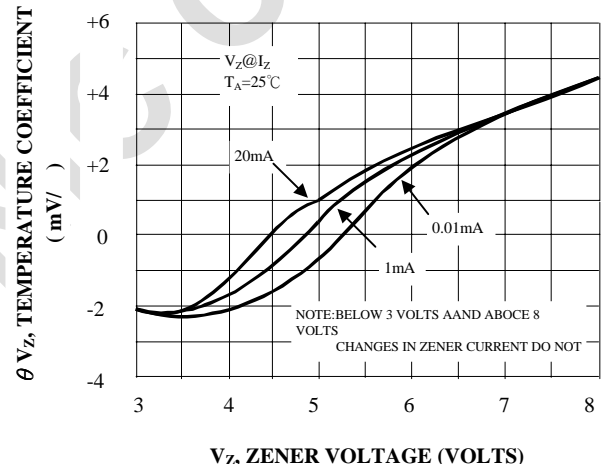
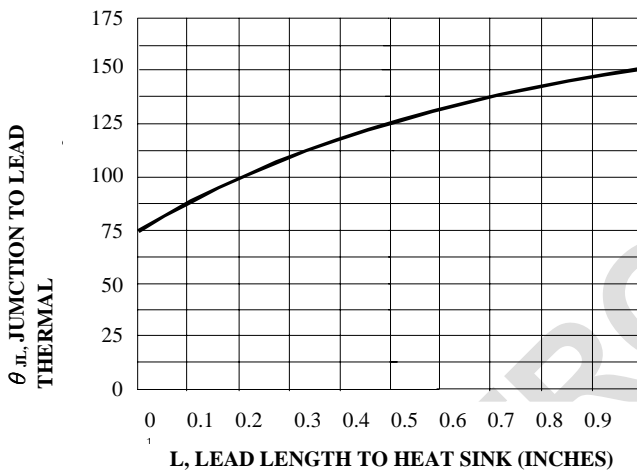


Figure 3. Typical Thermal Resistance versus Lead

Figure 4. Effect of Zener Current


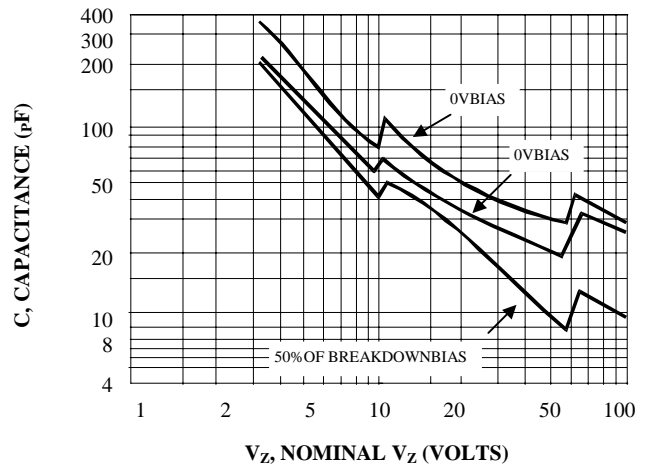


Figure 7 - Power Temperature Derating Curve

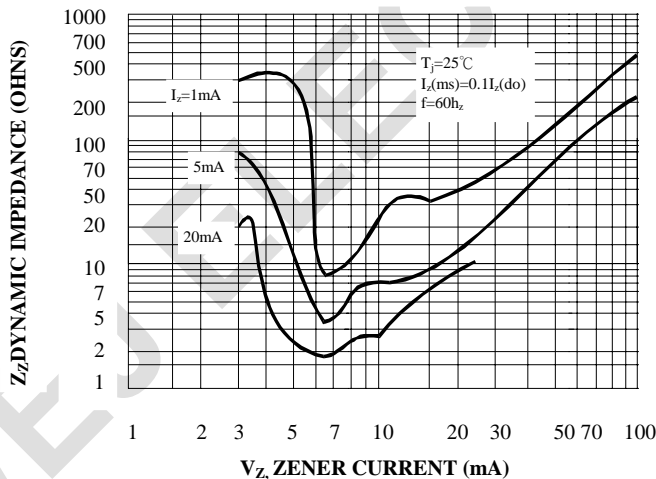