


TO-251-3L/TO-252-2L Plastic-Encapsulate Voltage Regulators

CJ7806 Three-terminal positive voltage regulator

FEATURES

- Maximum Output current I_{OM} : 1.5 A
- Output voltage V_o : 6 V
- Continuous total dissipation P_D : 1.25 W ($T_a = 25^\circ C$)
10W ($T_c = 25^\circ C$)

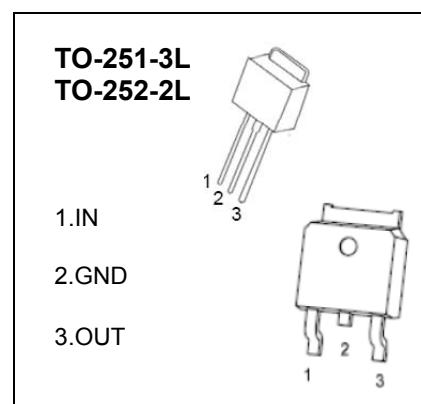

ABSOLUTE MAXIMUM RATINGS (operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	V_i	35	V
Thermal Resistance from Junction to Air	$R_{\theta JA}$	100	°C/W
Thermal Resistance from Junction to Case	$R_{\theta JC}$	12.5	°C/W
Operating Junction Temperature Range	T_{OPR}	0~+150	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=11V, I_o=500mA, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	V_o	25°C	5.75	6	6.25	V
		8V≤ V_i ≤21V, $I_o=5mA-1A$, $P\leq 10W$	0-125°C	5.7	6	6.3
Load Regulation	ΔV_o	$I_o=5mA-1.5A$	25°C		14	mV
		$I_o=250mA-750mA$	25°C		4	mV
Line Regulation	ΔV_o	8V≤ V_i ≤25V	25°C		5	mV
		9V≤ V_i ≤13V	25°C		1.5	mV
Quiescent Current	I_q		25°C		4.3	mA
Quiescent Current Change	ΔI_q	8V≤ V_i ≤25V	0-125°C		1.3	mA
		5mA≤ I_o ≤1A	0-125°C		0.5	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o=5mA$	0-125°C		-0.8	mV/°C
Output Noise Voltage	V_N	10Hz≤f≤100KHz	25°C		45	μV
Ripple Rejection	RR	9V≤ V_i ≤19V, f=120Hz	0-125°C	59	75	dB
Dropout Voltage	V_d	$I_o=1A$	25°C		2	V
Output resistance	R_o	f=1KHz	25°C		10	mΩ
Short Circuit Current	I_{sc}		25°C		550	mA
Peak Current	I_{pk}		25°C		2.2	A

TYPICAL APPLICATION

